


STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	87 N-0684-01	2019	43	109

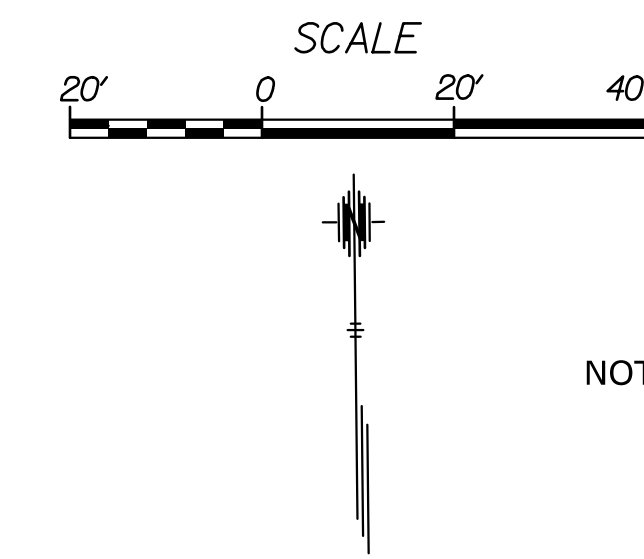

NOTE: DEVICE AND CONDUIT SYMBOLOGY ON PLAN SHEET IS NOT SHOWN TO SCALE FOR PLAN CLARITY. DO NOT SCALE LOCATIONS FROM PLAN SHEET.

### GENERAL NOTES

1. CONNECTION TO BUILDING SHALL BE PAID FOR BY THE BID ITEM "INTELLIGENT TRANSPORTATION SYSTEM (LSUM)" AND INCLUDE ALL LABOR, MATERIAL AND EQUIPMENT NECESSARY TO CONNECT FIBER TO BUILDING.
2. ALL FIBERS SHALL BE TERMINATED INTO FDU. FIBER SPLICING AND TERMINATION AT BUILDINGS IS NOT SPECIFICALLY QUANTIFIED AND SHALL BE SUBSIDIARY TO OTHER ITEMS OF THE CONTRACT.
3. FOR ACCESS, CONTACT JASON KELLEY 316-990-3027.
4. EXISTING FEATURES AND UTILITIES ARE SHOWN FROM AVAILABLE INFORMATION AND SHOULD BE CONSIDERED APPROXIMATE ONLY. IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO VERIFY UTILITIES AND THEIR EXACT LOCATION PRIOR TO CONSTRUCTION.
5. CONTRACTOR SHALL PROVIDE SHOP DRAWINGS AND DETAILS ON HOW THE CONNECTION TO THE BUILDING WILL OCCUR. THIS PLAN SHALL BE APPROVED BY THE ENGINEER AND BUILDING REPRESENTATIVE PRIOR TO FIBER INSTALLATION.
6. INSTALLATION SHALL MEET APPLICABLE BUILDING CODES.
7. CONTRACTOR SHALL SECURE EXISTING FIBER RACK TO THE FLOOR. EXISTING FIBER TO REMAIN IN SERVICE FOR ALL PHASES OF CONSTRUCTION.


Existing Fiber (216 SMFO) to Remain  
Install New Fiber using Fiber Innerduct  
through Existing 4" conduit

CAUTION!!!  
Existing Splice Vault to Remain.  
Do not open or disturb.



DATE	BY	REFERENCES NOTED	REFERENCES CHECKED

Drawn By : Road  
Plotted : 7/23/2019  
File : c:\transystems\pw\_local\transyscorp-pw\1ccbankaid0643930\C-FBR-DET-901.dgn

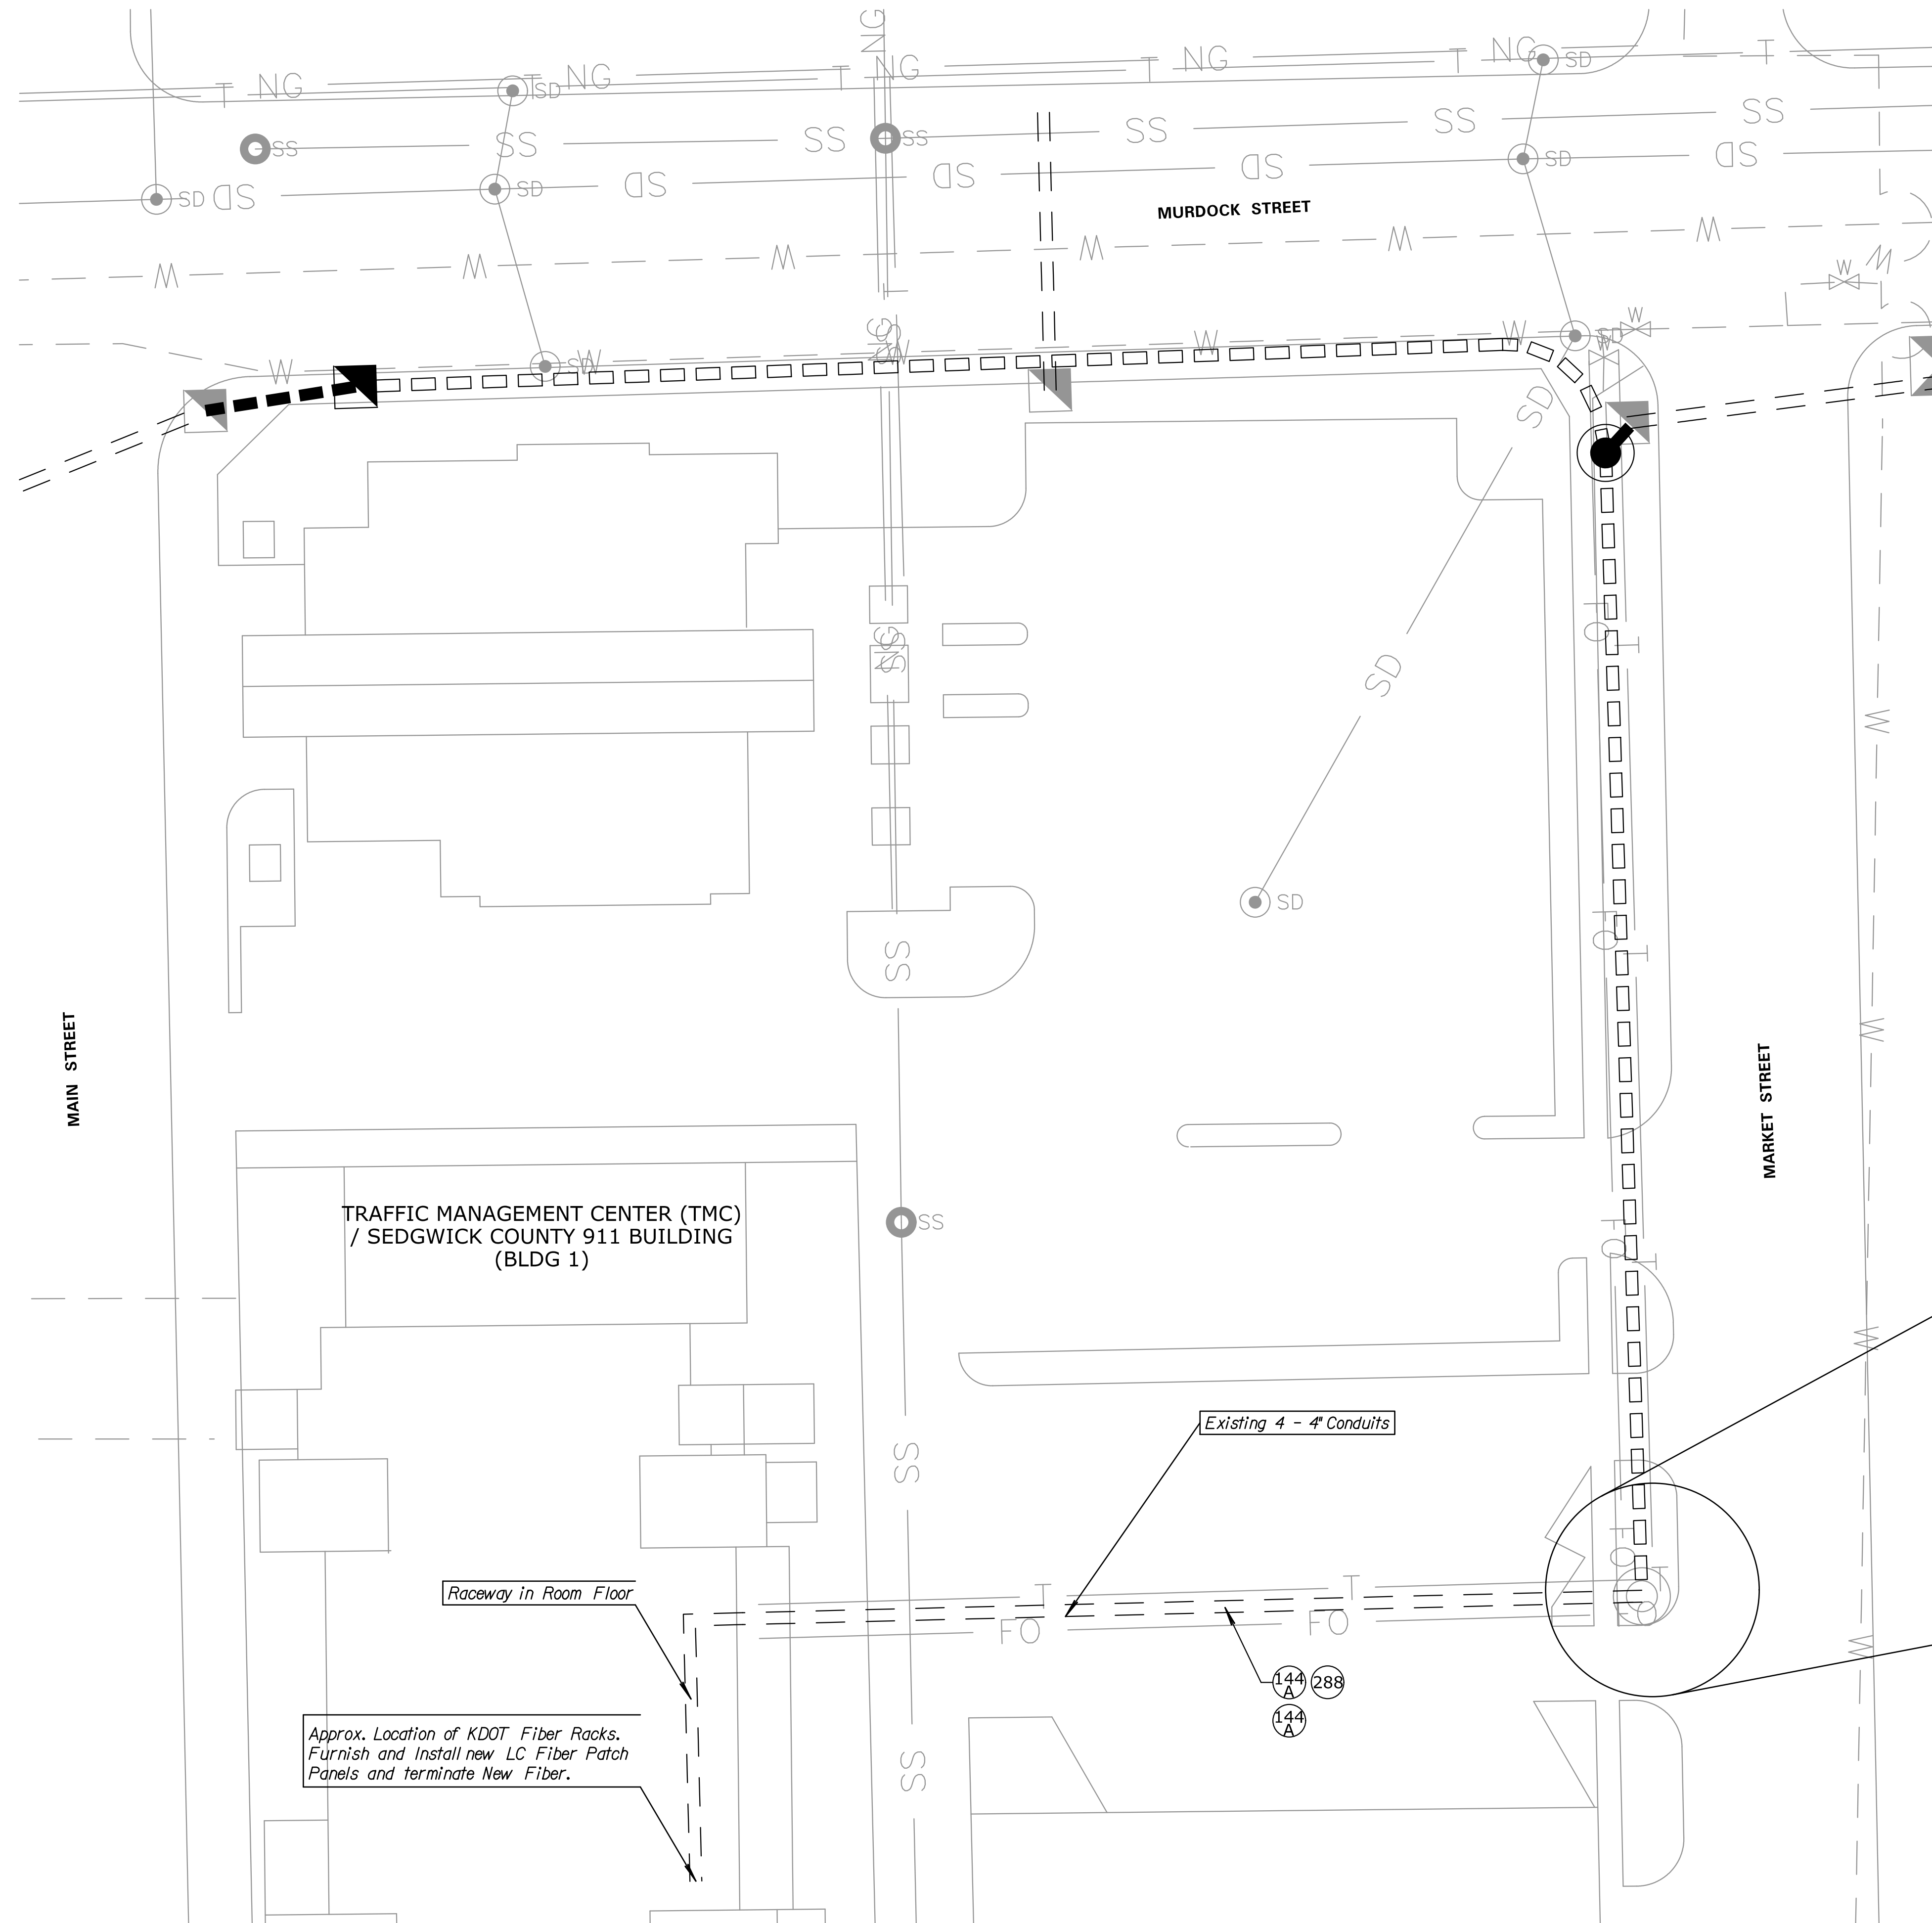

TRAFFIC MANAGEMENT CENTER (TMC)  
/ SEDGWICK COUNTY 911 BUILDING  
(BLDG 1)

Raceway in Room Floor

Approx. Location of KDOT Fiber Racks.  
Furnish and Install new LC Fiber Patch  
Panels and terminate New Fiber.

Existing 4 - 4" Conduits

144 (288)  
144 (A)

KANSAS DEPARTMENT OF TRANSPORTATION  
BLDG 1  
TRAFFIC MANAGEMENT CENTER  
(TMC) BUILDING CONNECTION