




Sta. 132+23.86 to 132+98.60, @ 13th St. Remove Exist. Pavement Markings as Necessary to Provide the Configuration Shown in These Documents. This Work Will be Subsidiary to the Bid Item "Pavement Markings".

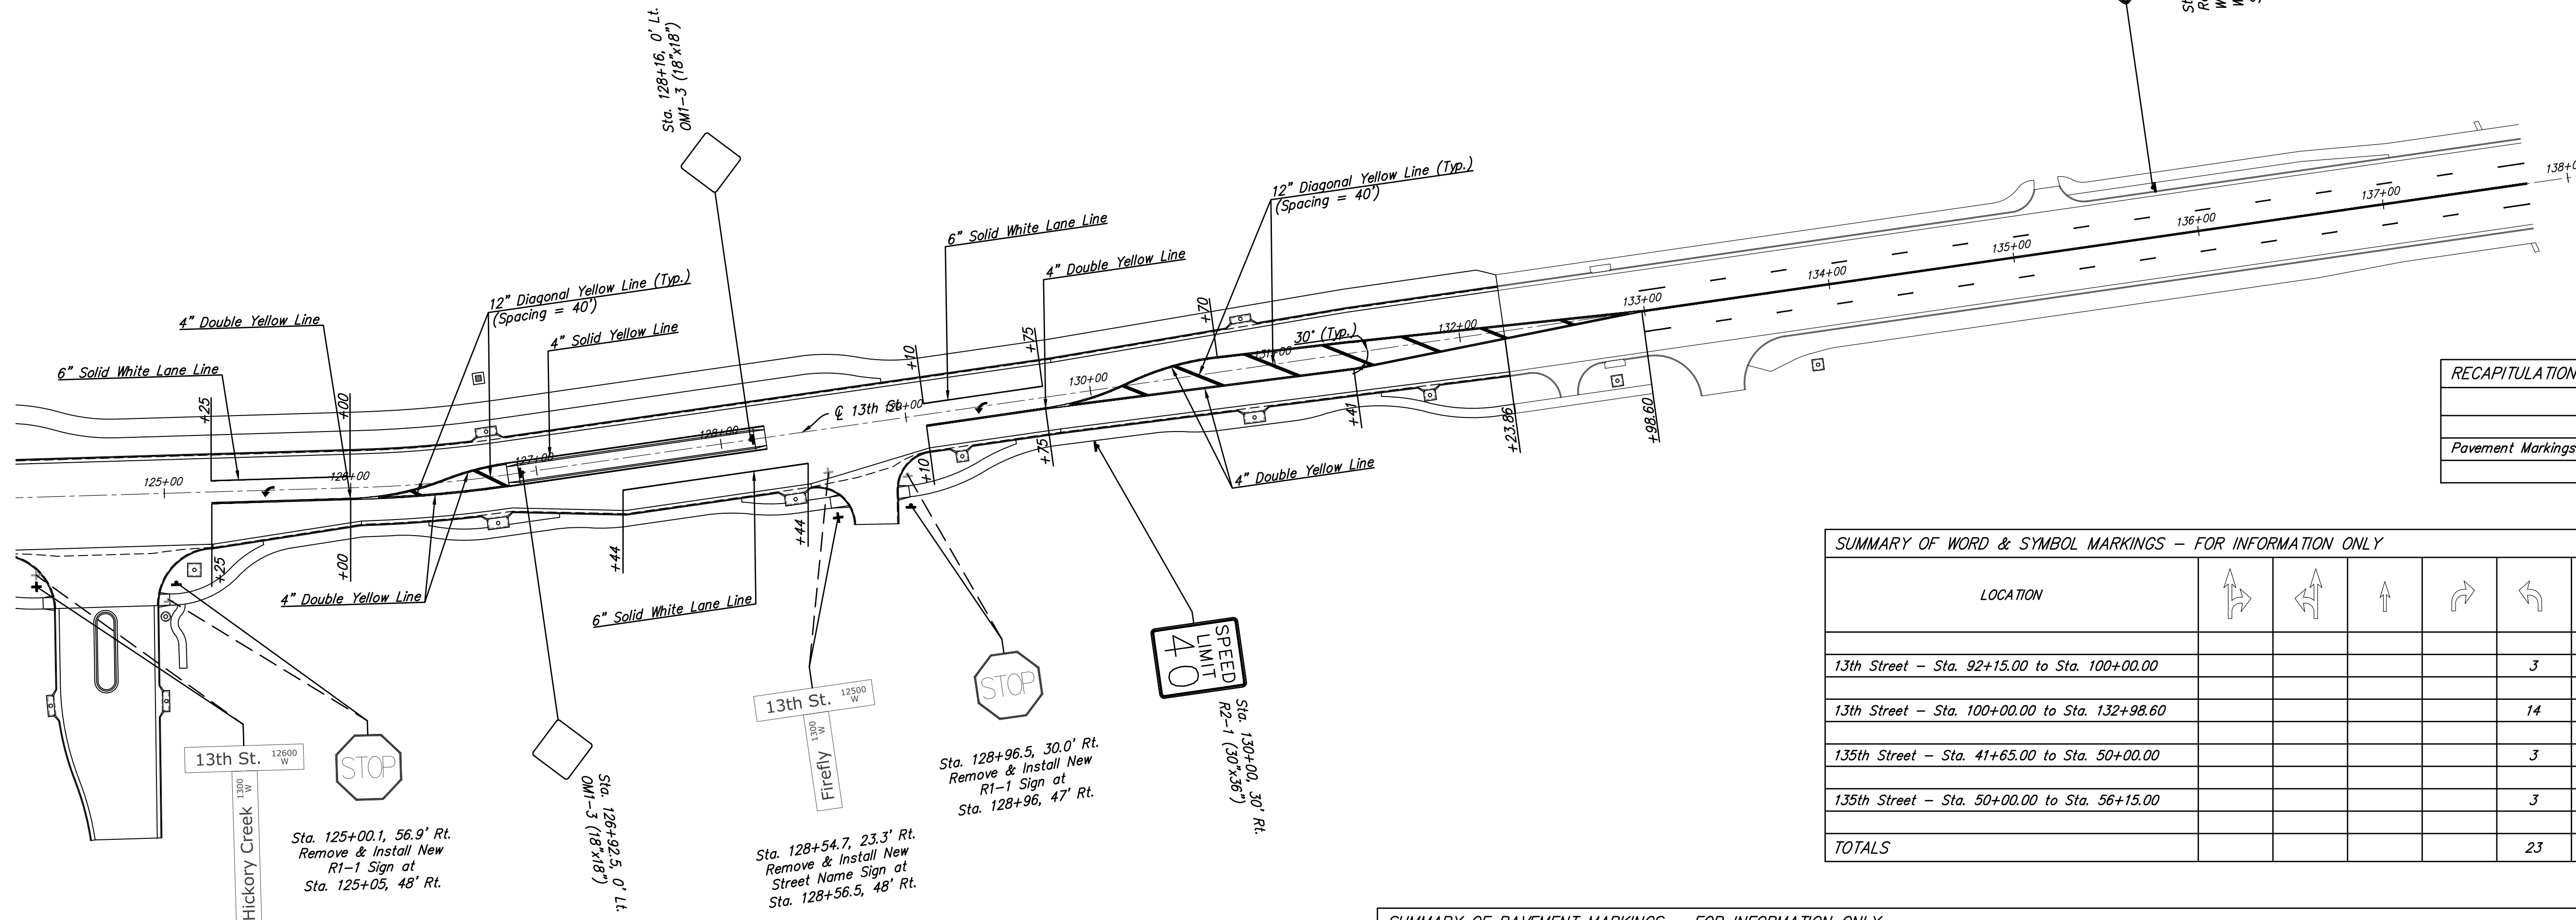

RECAPITULATION OF PAVEMENT MARKING QUANTITIES		
ITEM	TOTAL	UNITS
Pavement Markings	Lump Sum	LS

SUMMARY OF WORD & SYMBOL MARKINGS - FOR INFORMATION ONLY											
LOCATION	Right Turn	Left Turn	Through	Right Turn	Left Turn	Handicap	Stop Sign	STOP ONLY	X-ING	SCHOOL	Other
13th Street - Sta. 92+15.00 to Sta. 100+00.00								3			
13th Street - Sta. 100+00.00 to Sta. 132+98.60								14			
135th Street - Sta. 41+65.00 to Sta. 50+00.00								3			
135th Street - Sta. 50+00.00 to Sta. 56+15.00								3			
TOTALS								23			

SUMMARY OF PAVEMENT MARKINGS - FOR INFORMATION ONLY																			
LOCATION	4" Solid White Edge Line	6" Solid White Edge Line	6" Broken White Lane Line	6" Broken White Lane Line (PCP)	6" Dotted White Extension Line	6" Solid White Lane Line	6" Broken White Gore Line	12" Solid White Diagonal Line	12" Solid White Chevron Line	12" Solid White Type I Crosswalk Line	24" Solid White Type II Crosswalk Line	24" Solid White Stop Line	4" Solid Yellow Edge Line	4" Solid Yellow Double Line	4" Solid Yellow Line	4" Broken Yellow Line	6" Solid Yellow Edge Line	12" Solid Yellow Diagonal Line	
13th Street - Sta. 92+15.00 to Sta. 100+00.00		570.3	829.6			150.0						34.0		550.1	829.3				32.2
13th Street - Sta. 100+00.00 to Sta. 132+98.60			912.3			758.8						34.0		1,265.6	3,821.4	2,510.7			161.2
135th Street - Sta. 41+65.00 to Sta. 50+00.00		643.4	428.8			148.6						34.0		578.4	585.9				27.3
135th Street - Sta. 50+00.00 to Sta. 56+15.00			588.4			294.0						34.0		288.1	331.1				79.5
TOTALS		1,213.7	2,759.1			1,351.4						136.0		2,682.2	5,567.7	2,510.7			300.2

Sta. 124+30.0, 41.8' Rt. Remove & Install New Street Name Sign at Sta. 124+30, 58' Rt.

Sta. 128+54.7, 23.3' Rt. Remove & Install New Street Name Sign at Sta. 128+56.5, 48' Rt.

Sta. 128+96.5, 30.0' Rt. Remove & Install New R1-1 Sign at Sta. 128+96, 47' Rt.

Sta. 130+00, 30' Rt. R2-1 (30'x36')

Drawn By: Schwab-Eaton, P.A.
 Plotted: 5/3/2019 2:01 PM
 File: 15.W01 Signing & Marking.dwg



CITY OF WICHITA

SIGNING & PAVEMENT MARKING

Schwab Eaton

DESIGNED MS	DRAWN JM	SCALE 1" = 50'-0"	SHEET NO. 92
CHECKED MS	DATE 09/18		