

**BENCHMARKS:**  
 BM #1: Crows foot cut at SE corner of curb inlet south side of Kollmeyer near NE corner of Lot 82, Block A, Edge Water 3rd Addition.  
 Elev. = 1335.36 NGVD29

BM #2: Square Cut Cross in center of curb inlet top near the Northwest corner of Lot 31, Blk A., Edge Water 3rd Addition.  
 Elev. = 1333.65 NGVD29

BM #3: Brass disc in top of curb adjacent to fire hydrant at the Northwest corner of Driftwood and Driftwood Ct. near the Southeast corner of Lot 62, Blk D., Edge Water Addition.  
 Elev. = 1336.19 NGVD29

Subdivision Bench Marks		
Street & Station	Location Description	Elevation
Sunny Lane 3+19.10, 17.25' Rt.	Adjacent to Fire Hydrant near common front lot corner of Lots 12 & 13, Block B, Edge Water 3rd Addition.	



Baseline = CL Sunny Ln.

**WATER VALVE LOCATION TABLE**

VALVE NUMBER	STREET	BASELINE STATION	OFFSET DISTANCE	OFFSET DIRECTION
V2	Sunny Lane	3+19.10	26'	Rt.
V3	Sunny Lane	4+31.75	26'	Rt.

Paving contractor will be responsible to operate all water valves on the project, in the presence of the inspector, to ensure accessibility to the valves, and that all valves (except blowoffs) are left in the "ON" position when the project is completed.

All streets on this sheet are included in Phase 2.

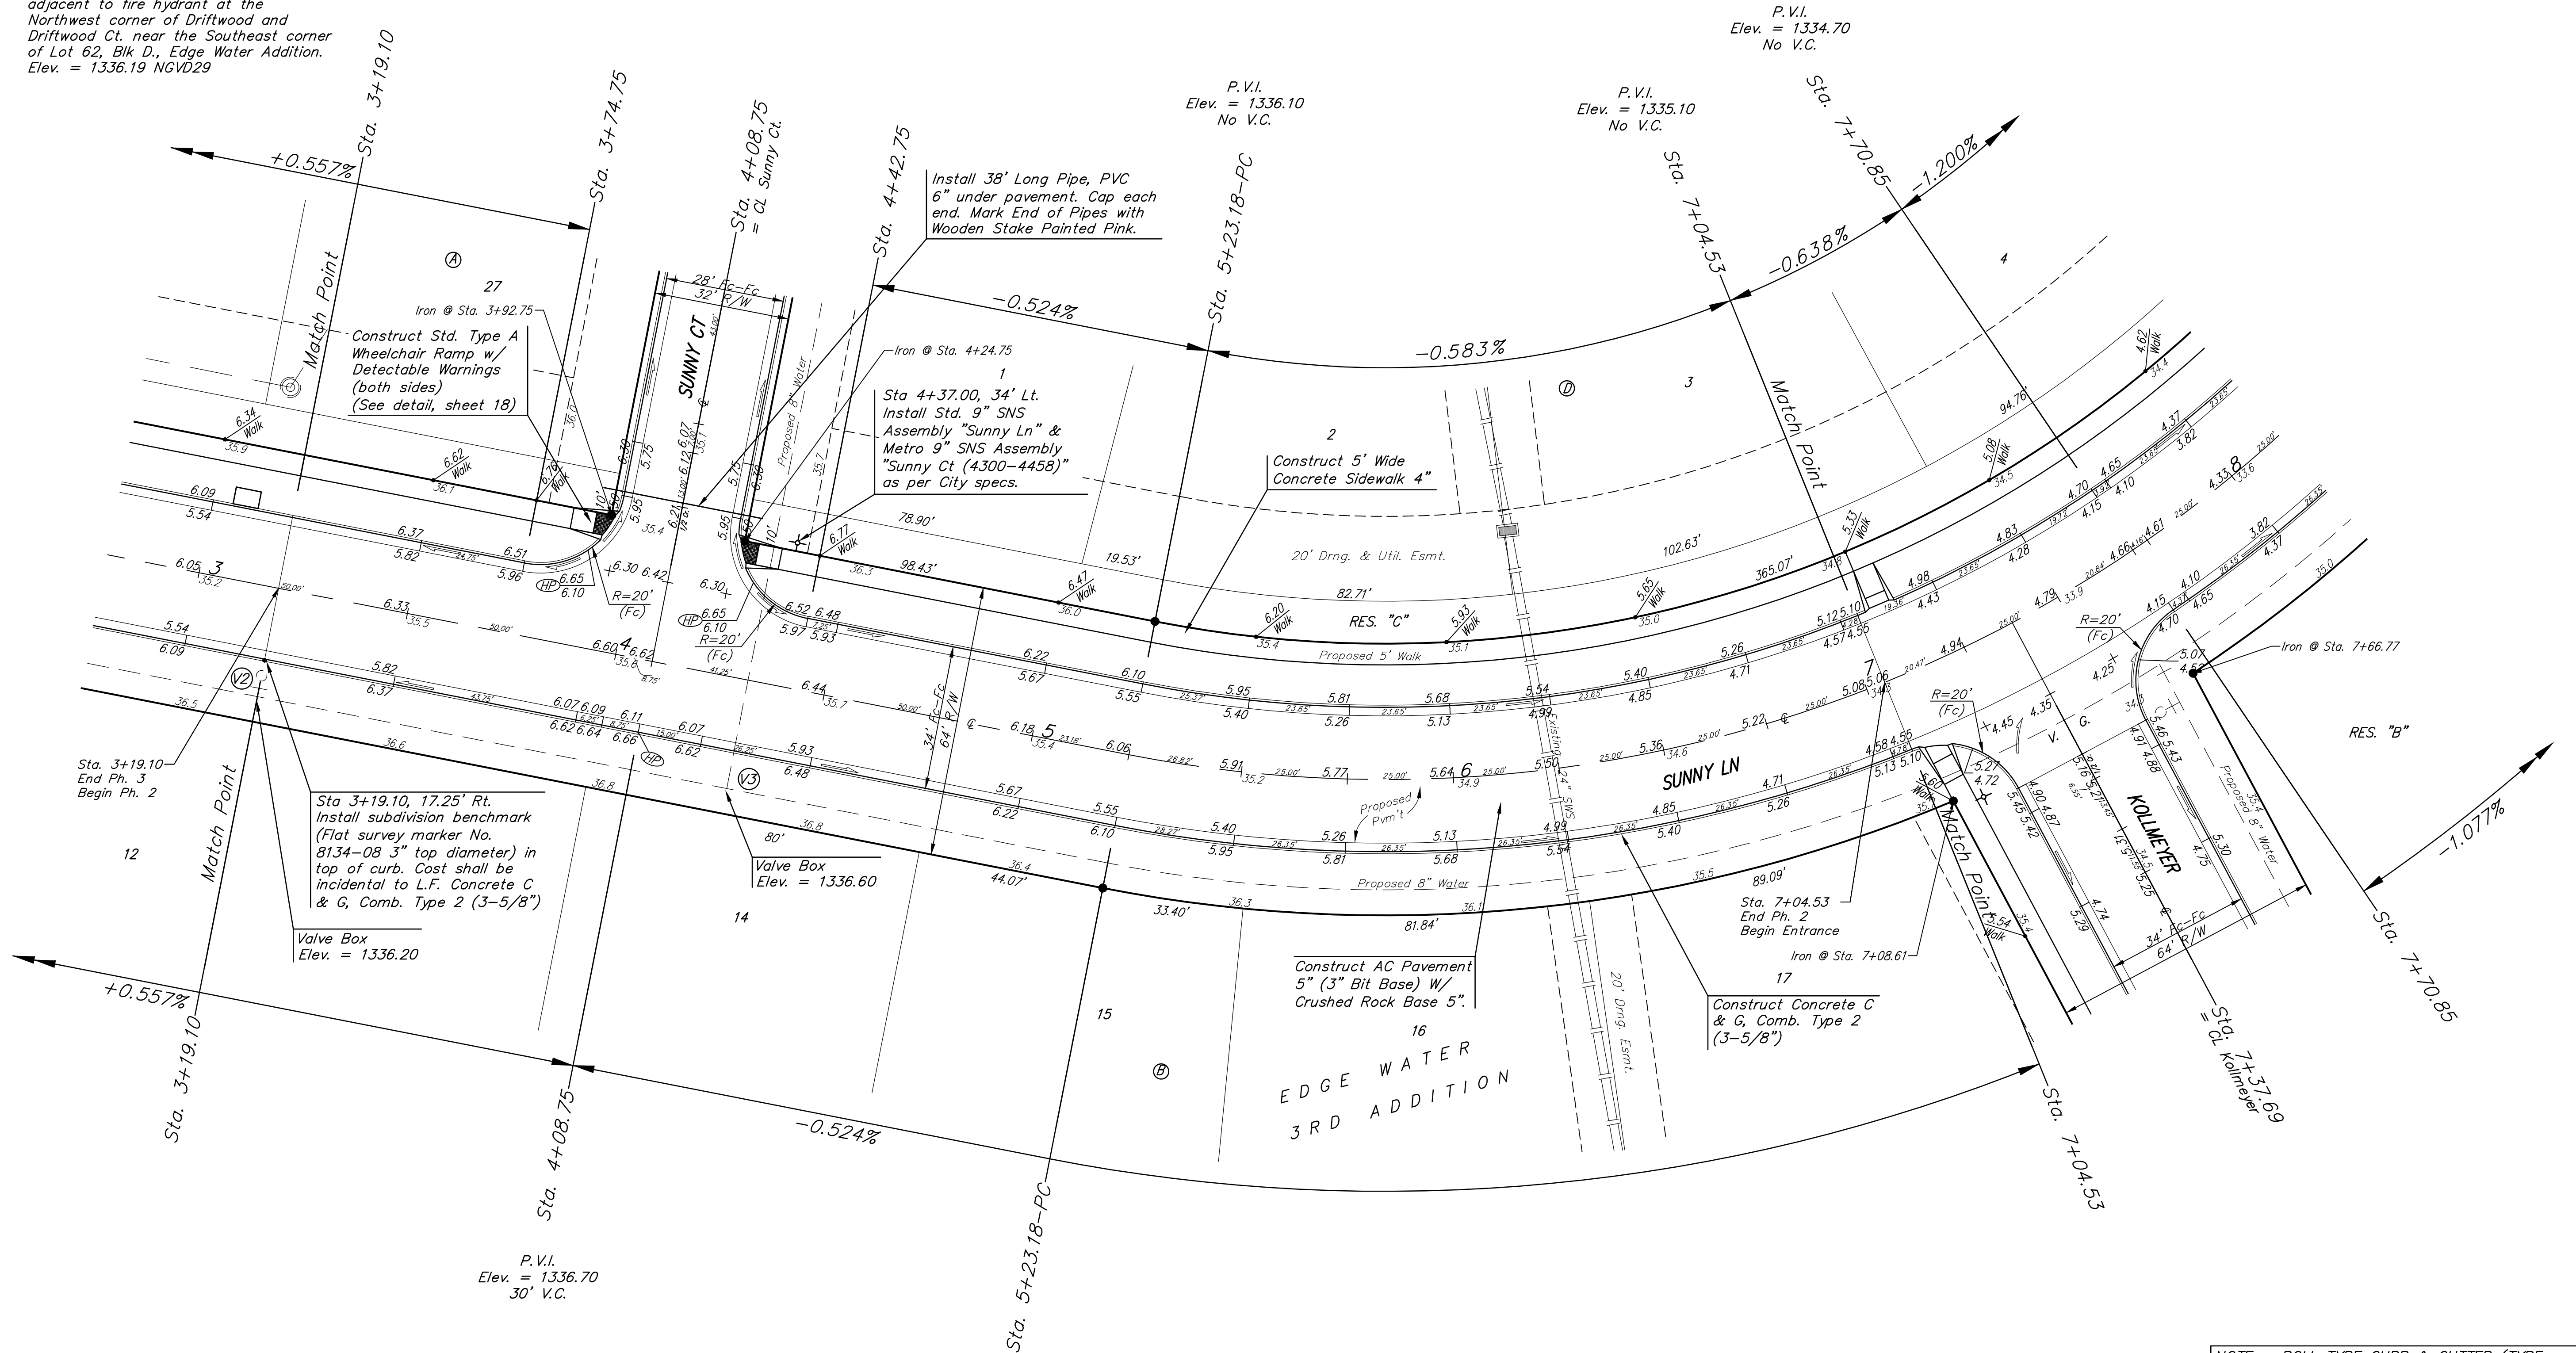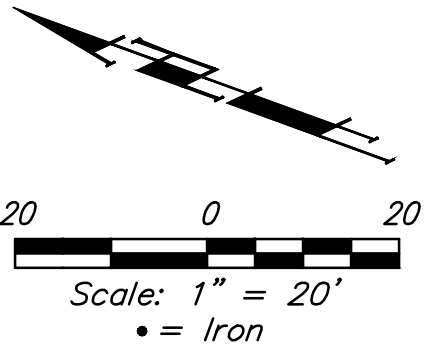

NOTE: ROLL TYPE CURB & GUTTER (TYPE 2) TO BE CONSTRUCTED ON THE PAVEMENT SHOWN ON THIS SHEET. TOP OF CURB ELEVATIONS ARE GIVEN FOR FULL HEIGHT CURB (TYPE 4).