

SCALE: 1" = 300'
0 300

TRAFFIC IMPROVEMENTS to convert **EMPORIA from CENTRAL to DEWEY** to **TWO-WAY** CITY OF WICHITA, KANSAS

Gary Janzen, P.E. City Engineer
Project Number
472-2020-085610
OCA Number
707170

GENERAL NOTES:

1. The Contractor shall give all property owners and/or tenants of developed property abutting the project limits a minimum of ten (10) days advance notice prior to start of construction. See Project Special Provisions for additional notification requirements.
2. Contractor will be required to provide a minimum advance notice of seventy-two (72) hours to utility companies prior to excavation or working adjacent to utilities. Kansas One-Call: 687-2470
3. Existing utilities and their locations, as shown on the plan, represent the best information obtainable at the time of design. The Contractor shall be aware that construction will occur in close proximity to existing utilities, and any conflicts with such utilities shall be reported to the Engineer. The Contractor should also be aware that some utility lines within the Project corridor may have been abandoned in place as new lines are installed. Contractor shall be responsible for notifying the affected utility to determine the status of said lines.
4. Prior to bidding the project, each bidder shall visit the site and satisfy himself of surface & subsurface conditions. Each bidder shall also fully inform himself as to the extent of the scope of work to be performed. Each bidder shall also be aware that no additional compensation will be awarded for extra work that should have been evaluated prior to bidding.
5. The Contractor shall not start work on the Project until the Project Inspector is assigned and is present on site. Any work done without inspection will be required to be uncovered for inspection. Staking and inspection for this Project will be the responsibility of the City of Wichita.
6. The Contractor shall comply with all applicable safety regulations and City of Wichita Specifications and Standards.
7. The Contractor shall be responsible for all traffic control measures to facilitate construction. All Construction Zone markings and signage shall conform to the latest version of the Manual on Uniform Traffic Control Devices (MUTCD) as published by the US Dept. of Transportation, Federal Highway Administration. All costs associated with construction markings and signage shall be SUBSIDIARY to the lump sum Bid Item "Traffic Control".
8. The Contractor shall remove and transport all regulatory signs, street name signs, information signs, and etc. that conflict with the proposed construction to the Central Maintenance Facility, 801 S. McLean. [Contact - Doug Jones (268-4031)]
9. Abandon All Existing Pole Bases & TMHs per City Specifications (3rd Street & Emporia, 3rd Street & Topeka, Arena Crosswalk). Notify City Staff when Signals have been Removed and City Staff will Remove the Ex. Electric Meter with coordination from Evergy. [Contact - Kevin Shore (316-268-4501)]
10. All work required to Remove and Reset Signal Poles, Construct New Concrete Bases, Install Poles in New Locations and Rewire New Signals to be Paid for by lump sum bid item "Traffic Signalization". (See 'Signal Pole Removal & Installation Quantities' for Quantity Reference)
11. All Signal Infrastructure which are not reused on this project shall be transported to the City of Wichita Maintenance Facility and Paid for by bid item "Transport of Salvaged Material" (See Table for Reference)
12. Proposed Locations Were Hydro-Excavated to Ensure Utilities are Clear of Signal Pole Bases. Temporary Asphalt was used to repair the excavation. Contractor to remove and replace sidewalk panels as needed for construction of signal pole bases and to repair the temporary asphalt. To be paid for by measured quantity bid item "Concrete Sidewalk 4".


DESIGN DESIGNATIONS

AADT 2017	≈2,000-3,000 vehicles
V	30 mph
Project Length	5,100 feet


BID INFORMATION
IF the BASE BID and ADD ALTERNATE #1 are Accepted, DISREGARD Add Alternate #1 Modifications - Sheet 16
IF ONLY the BASE BID is Accepted, USE Add Alternate #1 Modifications - Sheet 16 for Changes to the Base Plans

SHEET INDEX

- BASE PLAN:**
- 1 Title Sheet
 - 2 Notepage
 - 3 Signal Demo Plans
 - 4-5 Signal Plans
 - 6-7 Signal Wiring Plans
 - 8 Signal Details
 - 9-11 Signing Plans
 - 12 Signing Details
 - 13-15 Marking Plans
- MODIFICATIONS:**
- 16 Add Alternate #1 Modifications

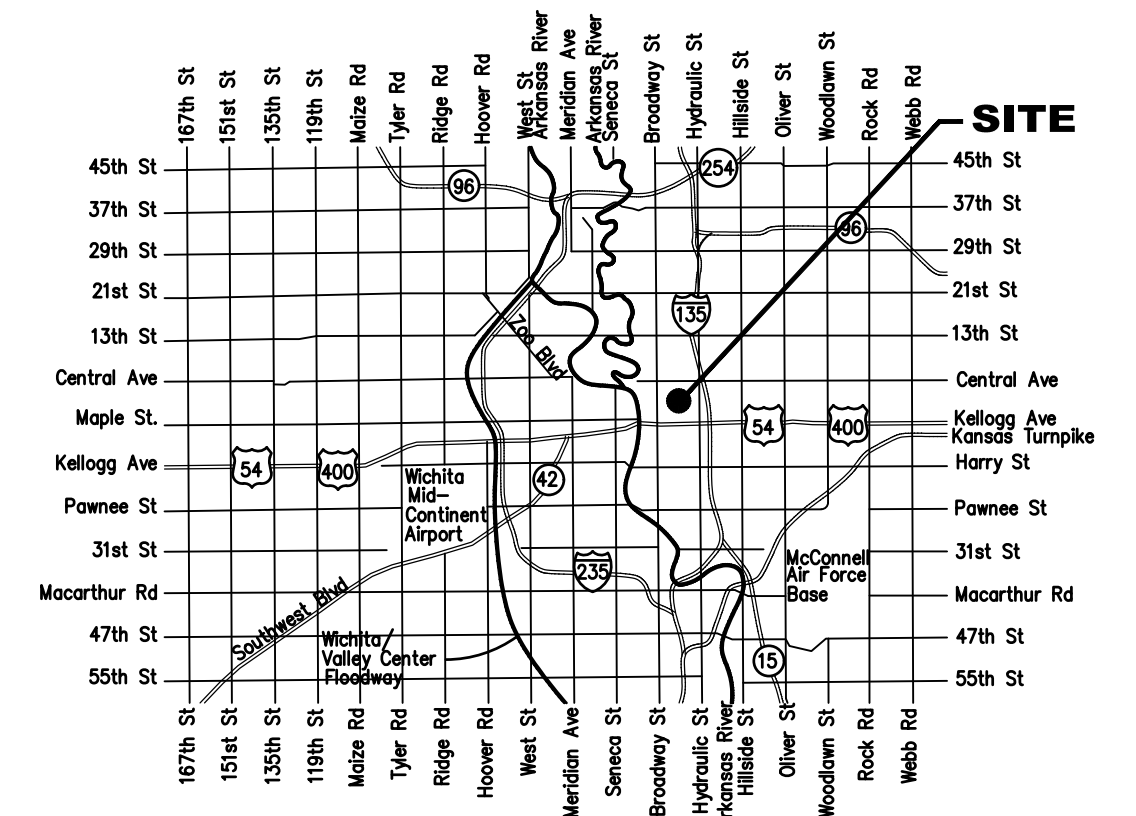

VICINITY MAP

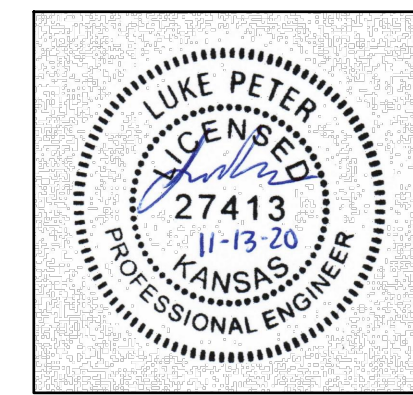

315 ELLIS | WICHITA, KS 67211
[P] 316-262-7271
[BaughmanCo.com]