



Loop Construction/Installation Details


Typical Conventional Loop Installation

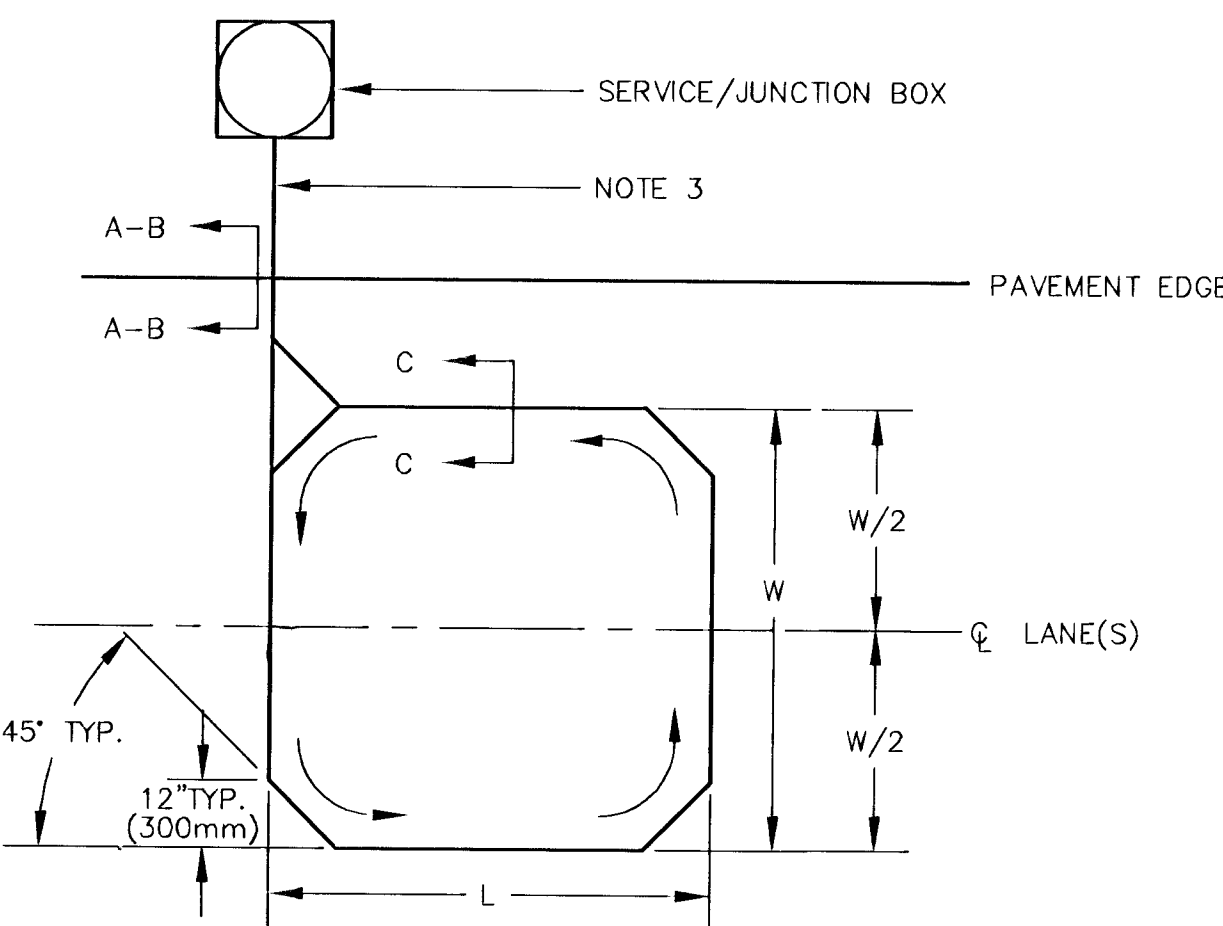

Detail A - No Curb & Gutter

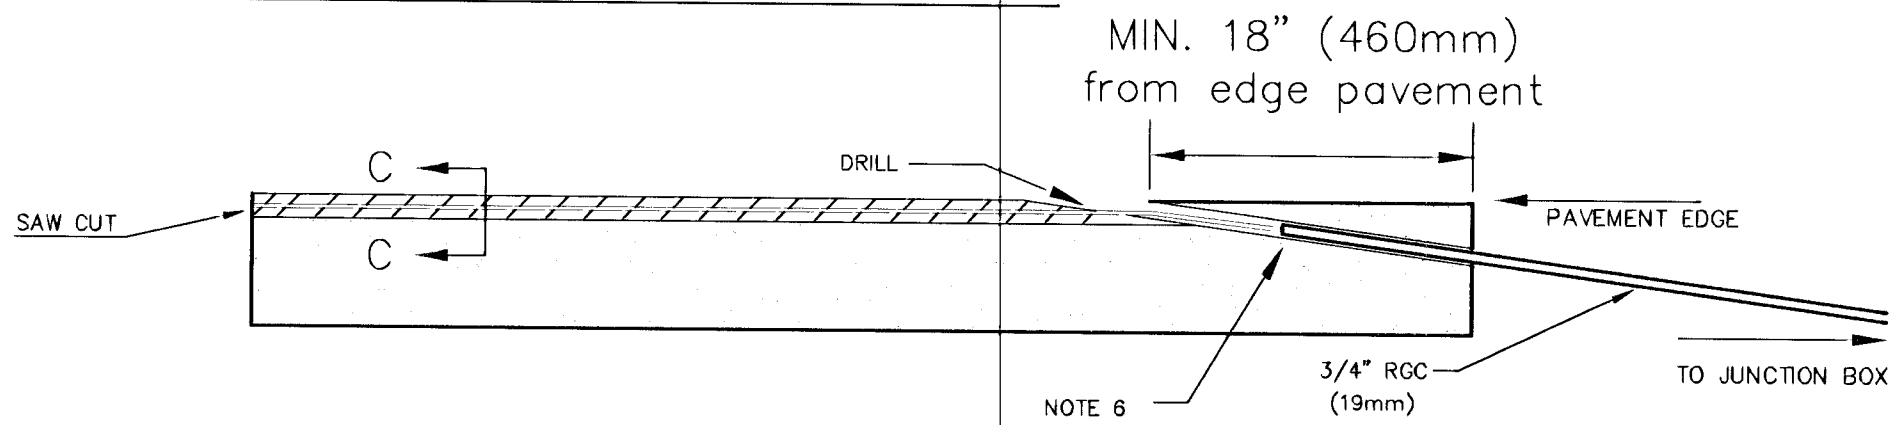


Detail B - Full Curb & Gutter

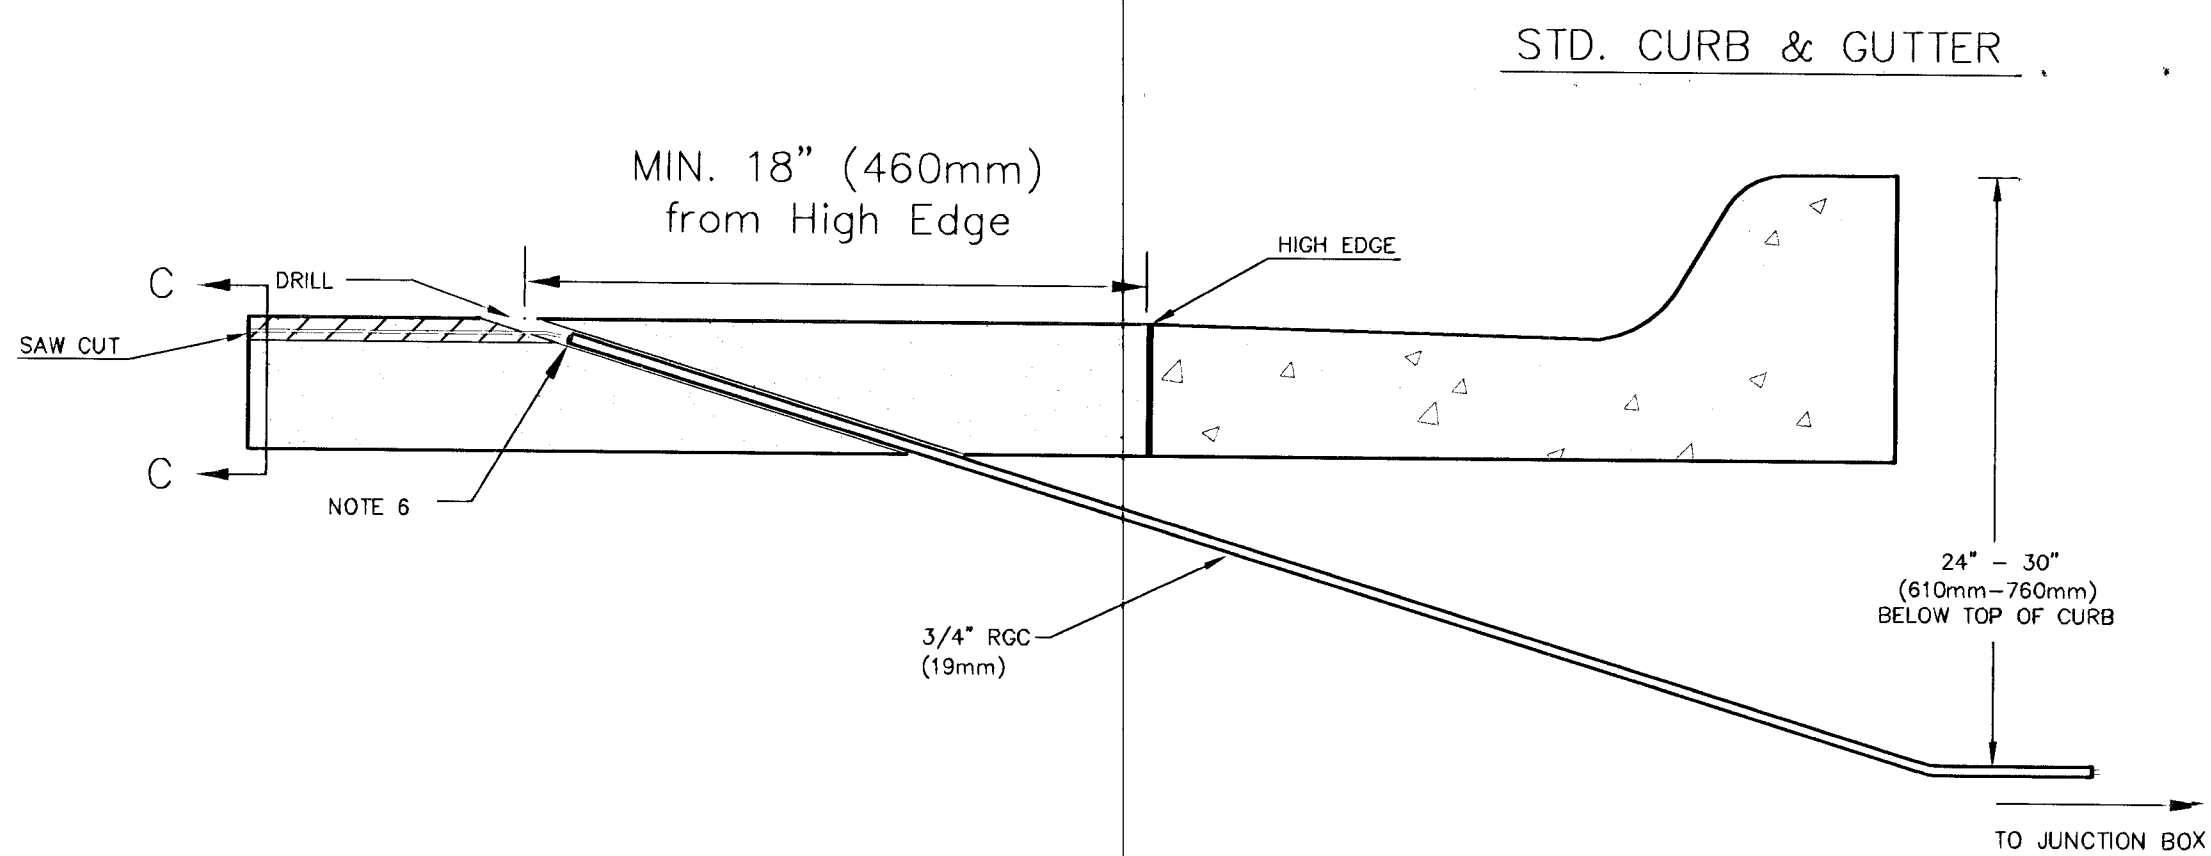


NOTES:

- 1. Loop saw cut shall be filled with approved sealant to within 1/8" (4mm) of pavement surface.
- 2. All loops shall be wound in the same direction.
- 3. Loop wire between the loop and the service/junction box shall be twisted 2 turns per foot.
- 4. No expansion joint in the pavement or curb & gutter shall be utilized in the placement of loop wire runs or conduit embedding.
- 5. The loop wire shall not pass through any part of any drive approach and/or corner radius.
- 6. All conduit ends shall be sealed with duct seal to prevent loop sealant from entering conduit.
- 7. Loop feeder conduit shall be a minimum of 12" (300mm) from any other loop feeder conduit.
- 8. Saw cuts running parallel with expansion joint or any other saw cut shall be a minimum of 12" (300mm) apart.
- 9. a. Loops 25' (7.6m) or less - 4 turns.
b. Loops over 25' (7.6m) - 3 turns.
c. Quadrapole loops - 2-4-2 turns.
- 10. The loop wire shall have 2" (50mm) slack at all crossings of pavement joints to allow for expansion/contraction of pavement. - Detail D"


Typical Quadrapole Loop Installation

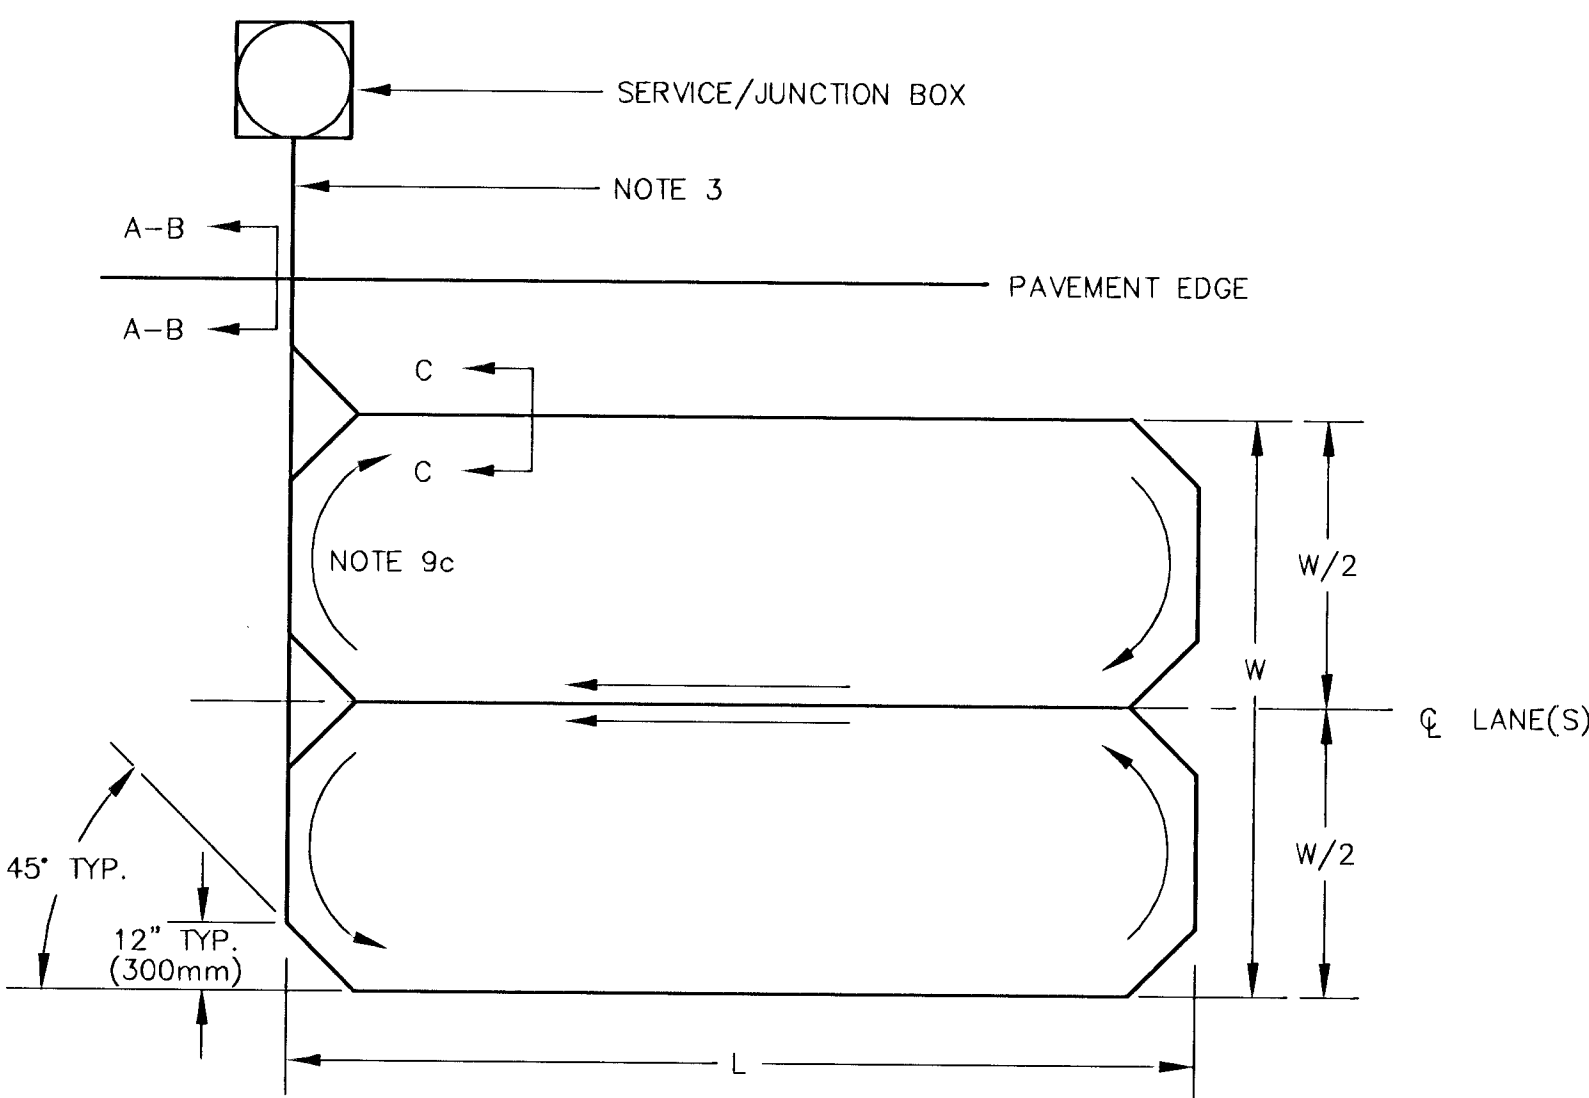

Detail C - Saw Cut

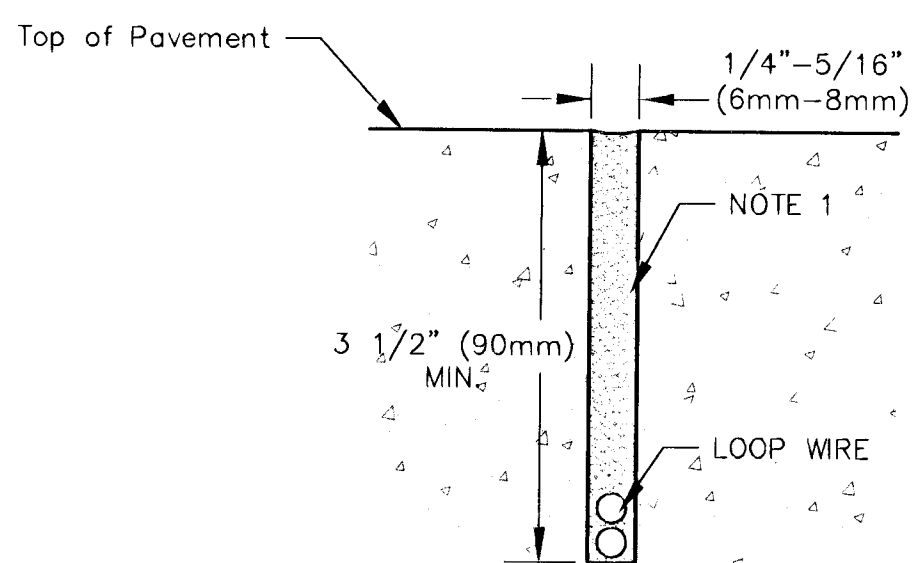

Detail D - Pavement Joint Crossing

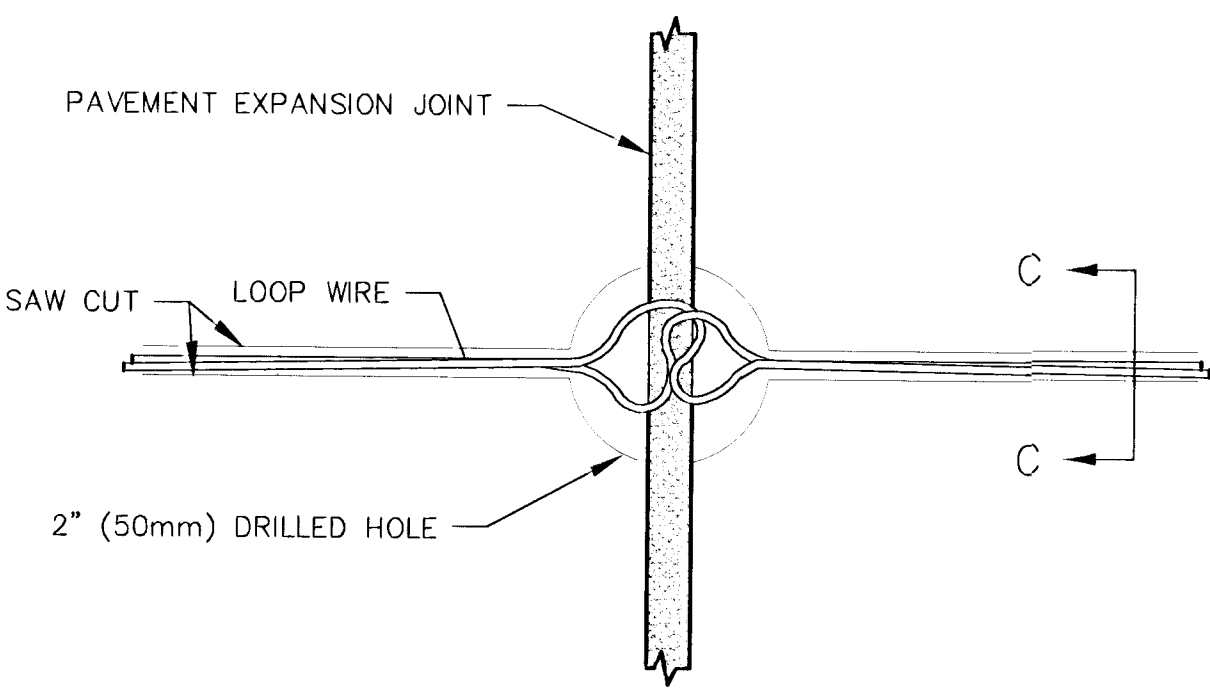

REV. DATE	COMMENTS	INT