

SERVICE CONNECTION SCHEDULE									
LOT	ADDRESS	ACCOUNT NUMBER	BASELINE STATION	BASELINE OFFSET	LINE NO.	LONG	SHORT	COMMENTS	
E. 16th ST.									
-	*1647	884411	13+25.97	22.93' RT.	1		1		
1	3800	104978	17+56.81	34.03' LT.	1		1		
2	3810	55591	18+16.77	21.26' LT.	1		1		
3-4	3820	57381	19+06.29	18.87' LT.	1		1		
N. YALE AVE.									
6-8	1752	43800	11+05.86	22.00' LT.	2	-	-	METER REMOVED	
10-12	1746	43798	11+75.19	21.90' LT.	2	-	-	METER REMOVED	
14-16	1738	43797	12+38.85	21.70' LT.	2	-	-	METER REMOVED	
18-20	1736	43796	12+59.95	21.30' LT.	2	-	-	METER REMOVED	
22	1730	43795	13+25.50	21.13' LT.	2	-	-	METER REMOVED	
26-28	1722	43794	14+00.72	21.00' LT.	2	-	-	METER REMOVED	
30-32	1720	43793	14+32.03	21.30' LT.	2	-	-	METER REMOVED	
38	1714	43810	15+01.82	21.79' LT.	2	1			
39-45	1701	47582	15+60.00	19.18' RT.	2		1		
40-42	1706	43792	15+65.74	21.49' LT.	2	1			
44-46	*3602	43799	15+93.17	22.72' LT.	2	1			
N. HARVARD AVE.									
2-6	1776	51092	10+99.54	19.05' LT.	3		1		
5-9	1747	46664	11+52.31	21.13' RT.	3	1			
8-14	1742	46665	11+83.38	18.58' LT.	3		1		
11-15	1739	47427	12+40.75	18.44' RT.	3	1			
17-21	1733	47426	12+70.11	19.16' RT.	3	1			
16-20	1736	41158	12+91.85	21.62' LT.	3		1		
23-27	1727	42435	13+59.35	18.90' RT.	3	1			
22-26	1728	40714	13+61.81	21.55' LT.	3		1		
30-32	1716	12095	14+25.35	19.15' LT.	3		1		
29-33	1723	51613	14+36.49	17.64' RT.	3	1			
34-36	1716	95036	14+97.33	19.31' LT.	3		1		
38-40	1710	60283	15+44.48	18.46' LT.	3		1		
35-45	1705	41760	15+73.68	23.07' RT.	3	1			
N. BLUFF ST.									
3D	1746	46696	11+95.05	19.85' LT.	4		1		
4D	1740	46896	12+43.28	20.23' LT.	4		1		
5D	1734	44592	13+11.03	18.29' LT.	4		1		
15A	1727	45200	13+54.42	22.77' RT.	4	1			
6D	1728	44075	13+67.90	19.25' LT.	4		1		
7D	1722	44076	14+21.69	18.57' LT.	4		1		
14A	1721	43187	14+39.55	21.52' RT.	4	1			
8D	1716	44262	14+86.00	19.10' LT.	4		1		
13A	1715	43859	14+90.99	21.71' RT.	4	1			
9D	1708	44051	15+44.81	18.19' LT.	4		1		
12A	1707	44052	15+45.43	23.05' RT.	4	1			
11A	1701	44728	16+04.24	23.23' RT.	4	1			
10D	1702	43973	16+05.81	19.41' LT.	4		1		
1C	1658	45051	17+19.52	19.69' LT.	4		1		
19B	1659	43860	17+27.40	22.58' RT.	4	1			
2C	1652	44408	17+81.22	18.87' LT.	4		1		
18B	1653	44172	17+84.01	22.55' RT.	4	1			
17B	1647	43181	18+43.19	21.44' RT.	4	1			
3C	1646	44370	18+43.72	19.16' LT.	4		1		
4C	1640	45795	18+99.00	18.38' LT.	4		1		
16B	1641	44729	19+00.33	22.65' RT.	4	1			
15B	1635	44280	19+61.25	23.55' RT.	4	1			
5C	1634	45384	19+65.10	18.59' LT.	4		1		
14B	1629	43922	20+22.63	21.98' RT.	4	1			
13B	1623	44284	20+80.44	22.90' RT.	4	1			
TOTAL						21	22		

* METER IS ADJACENT TO A STREET DIFFERENT FROM HOUSE ADDRESS.


SERVICE CONNECTION SCHEDULE									
LOT	ADDRESS	ACCOUNT NUMBER	BASELINE STATION	BASELINE OFFSET	LINE NO.	LONG	SHORT	COMMENTS	
REGENTS/E. 15th ST.									
1H	3917	47365	11+98.58	24.36' RT.	5		1		
2H	3921	44500	12+31.35	23.96' RT.	5	1			
3H	3925	45400	12+62.91	23.97' RT.	5	1			
4H	3929	45401	13+03.92	23.25' RT.	5	1			
11B	3920	44369	13+25.96	20.46' LT.	5		1		
5H	3935	44411	13+58.63	21.89' RT.	5	1			
6H	4001	44266	14+13.14	23.30' RT.	5	1			
12B	*1617	45512	14+25.92	49.08' LT.	5	1			
7H	4007	46531	14+63.83	23.53' RT.	5	1			
8H	4015	46532	15+17.12	23.06' RT.	5	1			
9H	4019	45632	15+77.56	22.08' RT.	5	1			
10H	4025	46517	16+40.95	24.14' RT.	5	1			
11H	4031	46533	17+03.55	23.30' RT.	5	1			
12H	4037	44591	17+67.27	22.83' RT.	5	1			
6C	4030	45365	17+89.90	19.38' LT.	5		1		
13H	4043	43858	18+21.30	22.41' RT.	5	1			
TOTAL						13	3		

* METER IS ADJACENT TO A STREET DIFFERENT FROM HOUSE ADDRESS.

#-# DESIGNATES A HOUSE ADDRESS WHICH SHARES TWO LOTS

FIRE HYDRANTS REQUIRED						
STATION	LINE NO.	BURY LINE ELEVATION	TOP OF PIPE ELEVATION	FIRE HYDRANT BURY REQUIRED*	VALVE STEM EXT. REQUIRED (ft)*	VALVE BOX ELEVATION
STA. 10+20.39	1	1386.38	1382.55	4.5'	N/A	1386.5
STA. 21+05.27	1	1382.69	1378.36	5.0'	N/A	1382.6
STA. 16+00.05	2	1375.44	1371.61	4.5'	N/A	1375.7
STA. 16+26.84	3	1378.14	1373.81	5.0'	N/A	1378.0
STA. 16+04.25	4	1395.42	1391.59	4.5'	N/A	1395.8
STA. 20+86.09	4	1398.26	1394.43	4.5'	N/A	1398.4
STA. 10+62.37	5	1392.03	1387.20	5.5'	N/A	1392.1

FIRE HYDRANTS TO BE INSTALLED A MINIMUM OF 3' BEHIND THE BACK OF CURB.

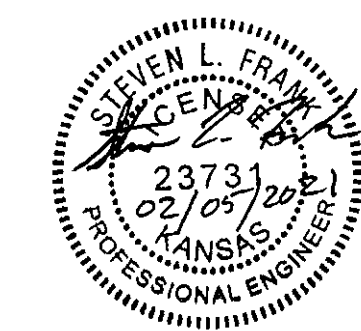

WATER LINE REPLACEMENT PLANS FOR
WATER LINE IMPROVEMENTS
SOUTH OF 17th STREET

©2021 MKEC Engineering All Rights Reserved
 www.mkec.com
 These drawings and their contents, including, but not limited to, all concepts, designs, & ideas are the exclusive property of MKEC Engineering (MKEC), and may not be used or reproduced in any way without the express consent of MKEC.

WATER SERVICE & FIRE HYDRANT TABLES

PROJECT NO.	448-2020-027409
DATE	FEB. 2021
SCALE	N/A
DESIGNED	DFL
DRAWN	JWC
CHECKED	SLF

NO.	REVISION	DATE

SHEET NO.