

DRAWING NAME: 56-92005 IC DEMO
 CENTER COORDINATES: 739
 ROTATION ANGLE:
 DATE LAST WORKED ON: SEPT. 22, 1994
 BRENT REWSBERG

PLAN	SURVEYED	BY	DATE
NOTE BOOK	PLOTTED		
NO.	ALIGNMENT	CHECKED	
		BY	

SCALE: 1"=20'

Remove Curb and Gutter and Pavement and Sidewalk within the Limits indicated by Hochures

Remove Inlet

Const. Limits

Remove Retaining Wall completely and Sidewalk as noted by Hochures

Remove Poles and Sign

Remove Water Meter and Concrete Vault. Cap existing pipe.

Remove Totem Pole and Foundation. Salvage to a location designated on Indian Center Property, and Re-install per Landscape Plans.

Remove Curb and Gutter and Pavement within the Limits indicated by Hochures

Remove Portland Cement Concrete Ring

Remove Flagpoles and Foundations Salvage Poles to a location Designated on Indian Center Property and Re-install per Hardscap Plans.

Remove Yard Light and Base Salvage to a location on Indian Center Property (Typical 7 locations)

Remove Sidewalk within the Limits indicated by Hochures

Remove Sprinkler Head (Typical Approx. 12 locations) Salvage to a location designated on Indian Center Property See General Note


GENERAL NOTES

- UNLESS OTHERWISE NOTED, OR DIRECTED AT THE TIME OF CONSTRUCTION, REMOVE ALL TREES WITHIN THE CONSTRUCTION AND HAUL OFF SITE TO AN APPROVED DISPOSAL AREA.
- ALL SPRINKLER HEADS LOCATED WITHIN THE CONSTRUCTION LIMITS SHALL BE REMOVED. LINES INTERRUPTED BY THESE REMOVALS WHICH CONNECT TO LINES TO REMAIN SHALL BE CAPPED OR SPLICED AS APPLICABLE. NO SEPARATE PAYMENT WILL BE MADE FOR THIS WORK AND IT SHALL BE CONSIDERED INCIDENTAL TO OTHERS ITEMS OF DEMOLITION.
- REMOVAL OF CURB AND GUTTER AND PAVEMENT CONTIGUOUS TO EXISTING ENTRANCE SHALL BE DELAYED UNTIL THE NEW ENTRANCE IS COMPLETE AND OPERATIONAL.
DEMOLITION OF PAVEMENT AROUND THE TOTEM POLE SHALL BE DELAYED UNTIL WORK IN THIS AREA CAN BE COMPLETED WITHOUT DELAY OR INTERRUPTION.
- UNLESS OTHERWISE NOTED, ALL MATERIAL REMOVED SHALL BE HAULED OFF SITE AND DISPOSED OF AT AN APPROVED LOCATION.
- SEE SH. NO. 15-1 FOR ADDITIONAL REMOVAL ITEMS.

Layout Control Point
 14 bar w/ PEC Cap set at point
 See Sh. No. for Additional Information

BENCHMARK
 CHISELED "B" ON TOP OF CURB AT SOUTHWEST CORNER
 OF EXISTING PARKING BAY APPROXIMATELY 96 FEET
 WEST OF BUILDING. 9021.208N, 12485.85E
 ELEV. -112.62

REV.	DATE	DESCRIPTION

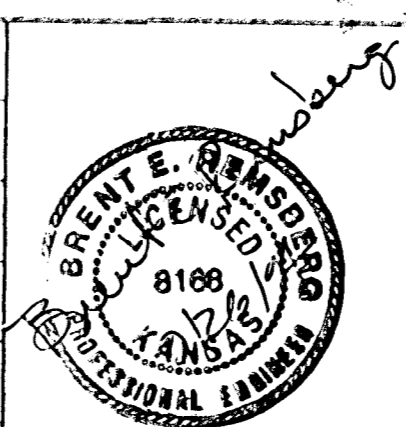

HELLMUTH, OBATA & KASSEBAUM, INC.
 DALLAS, TEXAS
 PROFESSIONAL ENGINEERING
 CONSULTANTS, P.A.
 WICHITA, KANSAS
 BRAD J. GOLDBERG
 DALLAS, TEXAS

MID-AMERICA
 ALL INDIAN CENTER
 SITE IMPROVEMENTS
 CITY OF WICHITA, KANSAS

DEMOLITION PLAN

PROJECT NO.	ISSUE DATE	SCALE	SHEET
		1"=20'	D-1