
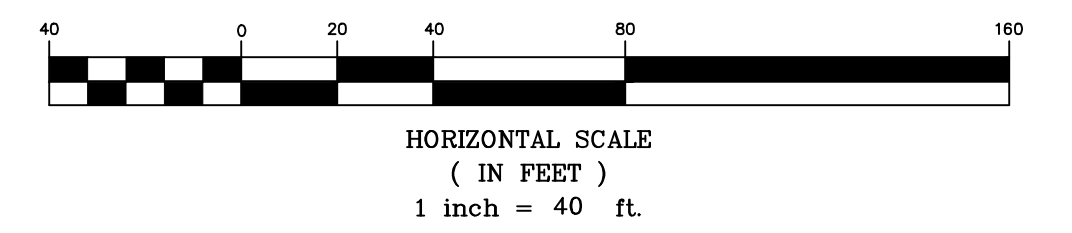


EARTHWORK SUMMARY:
(For information Only)

Pond Excavation = 11,192 CY	
R/W & Lot Grading:	
Sh. 4.0:	Excavation = 1,364 CY Fill = 13,289 CY
Sh. 4.1:	Excavation = 951 CY Fill = 537 CY
TOTAL:	
Excavation = 13,507 CY Fill = 13,826 CY	
NET: 319 CY FILL	

NOTES:

1. No shrink/swell factor was used to determine earthwork quantities.
2. There are existing stockpiles of dirt on-site from the excavation of basements for Phase 1 homes. Contractor shall use these stockpiles prior to importing dirt from off-site (if necessary).

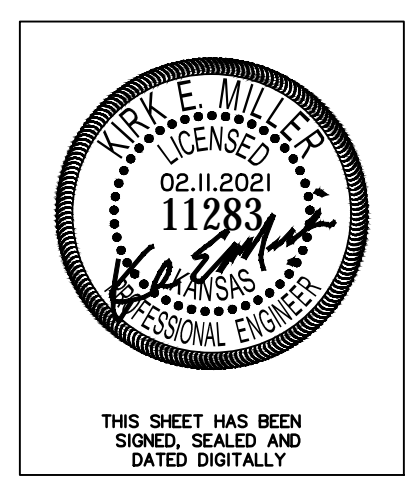

Fox Run Addition (Phase II)
Mass Grading Plan
Wichita, Kansas

	PROJECT NUMBER			
	KEM NO. 20061	FILE	DATE 10/2020	SHEET 4.0
117 E. Lewis, Wichita, KS 67202 (316)284-0242	DESIGN ME	DRAWN ZS	REVISED 02/11/2021	