


## DETAIL.DWG



SERVICE & JUNCTION BOX:


1. CONDUIT CONNECTION TO BE FLUSH TO WITHIN 125 mm OF INSIDE FACE OF SIDE WALL, CONDUIT TO DRAIN INTO SERVICE BOX.
2. CONDUIT CONNECTIONS TO SERVICE BOX SHALL BE TERMINATED WITH PLASTIC CABLE BUSHING.
3. CONDUIT SHALL BE SEALED WITH APPROVED SEALER AT INSIDE WALL FACE.
4. ALL SERVICE & JUNCTION BOXES TO HAVE 200 mm OF CRUSHED ROCK.

TRENCHING:

1. DEPTH TO BE 750 mm MINIMUM WITH ROCK & STUBBLE FREE BACKFILL TO SERVE AS BEDDING MATERIAL. MAINTAIN MINIMUM CONDUIT DEPTH IN TRENCH.
2. BACKFILL TO BE COMPACTED IN 150 mm LOOSE LIFTS BY HAND OR MECHANICAL TAMPING TO A 95% STANDARD DENSITY.

CONDUIT:

1. SLOPE CONDUIT TO DRAIN AS DIRECTED BY THE ENGINEER.
2. 75 mm RIGID STEEL CONDUIT BTWN. SERVICE BOXES.  
32 mm " " " BTWN. SERVICE & JUNCTION BOXES.  
19 mm " " " BTWN. JUNCTION BOXES.  
19 mm " " " BTWN. JUNCTION BOX & DETECTOR  
LOOP SAW CUT

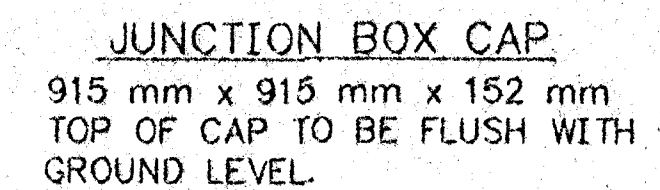

“SEE SERVICE BOX INSTALLATION  
FOR RING & COVER DETAILS.

[illegible]

|                                                                           |  |             |  |
|---------------------------------------------------------------------------|--|-------------|--|
| PROJECT DESCRIPTION                                                       |  |             |  |
| SERVICE/JUNCTION BOX, CONTROLLER PAD<br>CONSTRUCTION/INSTALLATION DETAILS |  |             |  |
| PROJECT NUMBER                                                            |  |             |  |
| DRAWN BY: T.M.                                                            |  | APPROVED BY |  |
| DATE: Feb. 96                                                             |  | REVISOR:    |  |
|                                                                           |  | DATE:       |  |
| CITY OF WICHITA                                                           |  |             |  |
| DEPARTMENT OF PUBLIC WORKS                                                |  |             |  |
| TRAFFIC ENGINEERING DIVISION                                              |  | SCALE       |  |
| WM. O. MCKINLEY                                                           |  | NO SCALE    |  |
| TRAFFIC ENGINEER                                                          |  |             |  |