
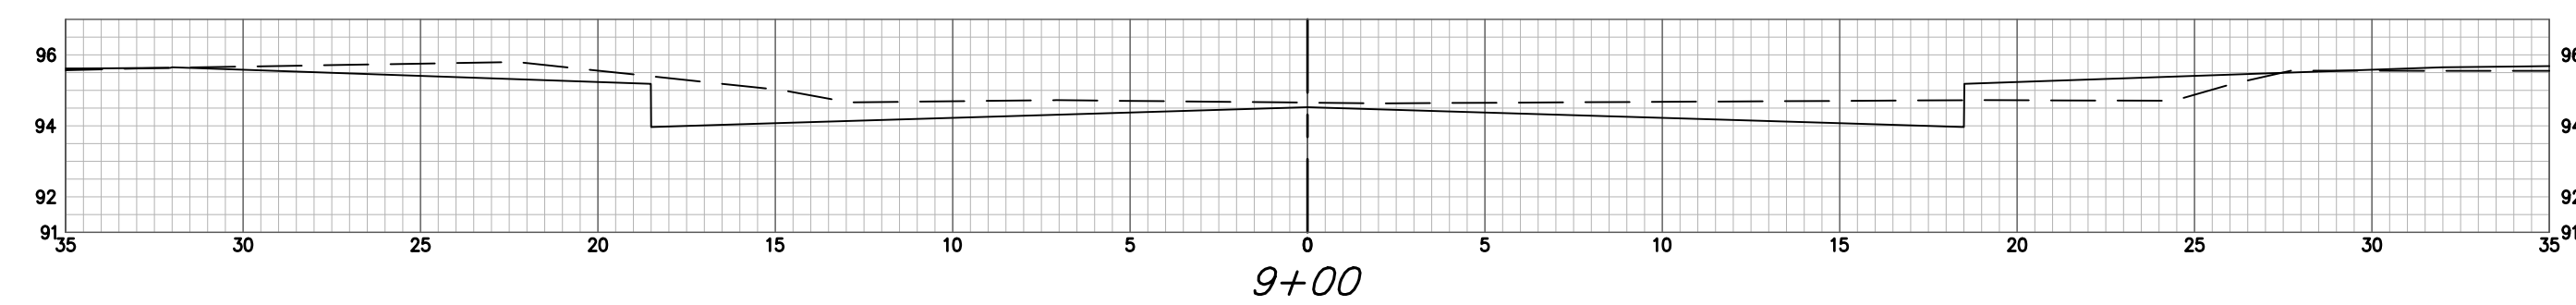


45TH ST S CY Ground Removed (unadjusted)				45TH ST S CY Ground Fill (unadjusted)			
Station	Area	Volume	Total	Station	Area	Volume	Total
0+37.90	22.91	0.00	0.00	0+37.90	2.41	0.00	0.00
0+50	26.78	11.14	11.14	0+50	2.02	0.99	0.99
1+00	34.03	56.31	67.44	1+00	0.94	2.74	3.74
1+50	50.15	77.94	145.38	1+50	0.33	1.18	4.91
2+00	56.84	100.06	245.44	2+00	0.06	0.34	5.25
2+50	55.68	105.41	350.85	2+50	0.00	0.05	5.30
3+00	50.38	99.00	449.84	3+00	0.00	0.00	5.30
3+50	39.81	83.76	533.60	3+50	0.04	0.04	5.34
4+00	34.46	68.79	602.39	4+00	0.52	0.49	5.84
4+50	27.91	57.75	660.13	4+50	2.15	2.48	8.31
5+00	27.27	51.09	711.23	5+00	2.14	3.98	12.29
5+50	25.34	48.72	759.95	5+50	2.73	4.51	16.80
6+00	19.75	41.75	801.70	6+00	3.31	5.59	22.39
6+50	16.85	33.89	835.58	6+50	4.04	6.80	29.20
7+00	18.39	32.63	868.22	7+00	5.85	9.15	38.35
7+50	30.21	45.00	913.22	7+50	1.42	6.73	45.08
8+00	33.26	58.77	971.99	8+00	0.32	1.61	46.68
8+50	34.02	62.80	1034.79	8+50	4.26	4.01	50.70
9+00	21.89	54.79	1089.57	9+00	4.87	6.53	57.23
9+33.29	15.32	22.95	1112.52	9+33.29	11.83	10.66	67.89

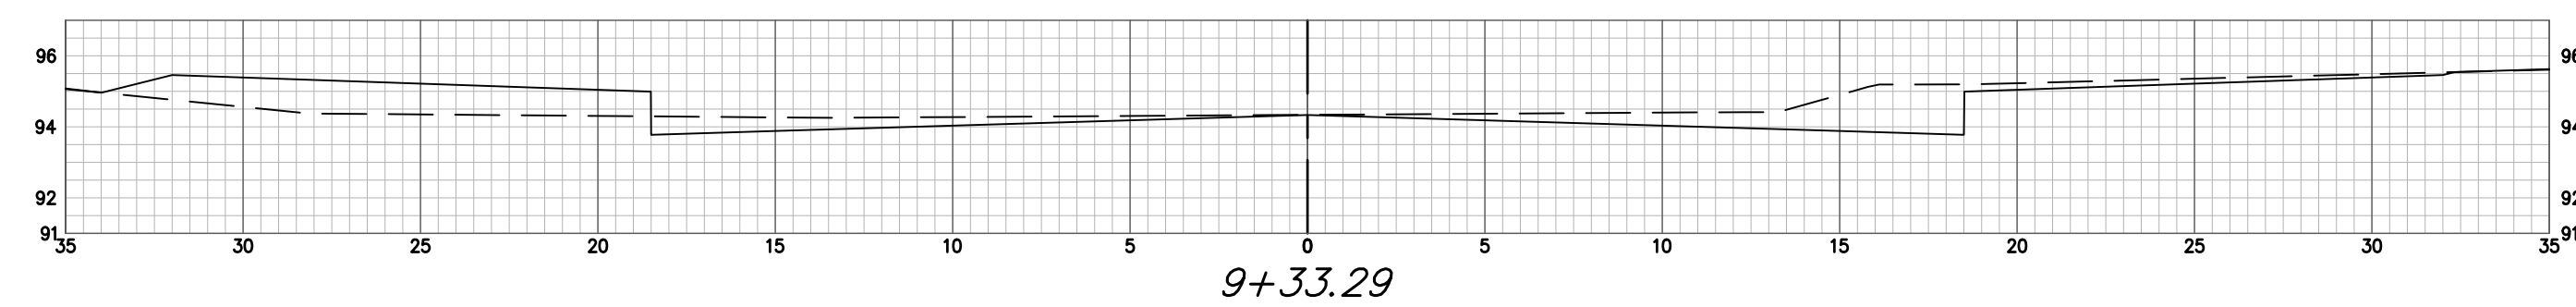

45TH ST S