

TREE STATIONING

STATION	NAME	OFFSET
21+85	Winter King Hawthorn	25' RT
22+03	Winter King Hawthorn	21' RT
22+11	Oklahoma Redbud	119' RT
22+24	Oklahoma Redbud	120' RT
22+27	Bald Cypress	17' RT
22+32	Oklahoma Redbud	118' RT
22+44	Skyline Honeylocust	70' LT
22+52	Bald Cypress	16' RT
22+66	Bald Cypress	124' RT
22+74	Canaert Juniper	124' RT
22+94	Canaert Juniper	15' RT
23+00	Ivory Silk Lilac	18' RT
23+02	Canaert Juniper	123' RT
23+08	Ivory Silk Lilac	34' LT
23+14	Canaert Juniper	15' RT
23+15	Skyline Honeylocust	123' RT
23+16	Ivory Silk Lilac	
23+30	Canaert Juniper	

TREE STATIONING

STATION	NAME	OFFSET
23+35	Canaert Juniper	123' RT
23+41	Canaert Juniper	116' RT
23+47	Lacebark Elm	17' LT
23+50	Skyline Honeylocust	118' RT
23+58	Winterberry Euonymus	13' LT
23+65	Winterberry Euonymus	11' LT
23+74	Lacebark Elm	10' LT
23+74	Lacebark Elm	16' RT
24+07	Lacebark Elm	22' RT
24+40	Snowdrift Crabapple	88' RT
24+46	Shingle Oak	35' RT
24+47	Snowdrift Crabapple	82' RT
24+47	Snowdrift Crabapple	89' RT
25+18	Prairiefire Crabapple	2' RT
25+23	Prairiefire Crabapple	14' RT
25+28	Prairiefire Crabapple	3' RT
26+08	Snowdrift Crabapple	4' RT
26+16	Snowdrift Crabapple	5' RT

TREE STATIONING

STATION	NAME	OFFSET
26+16	Oklahoma Redbud	108' RT
26+25	Oklahoma Redbud	108' RT
26+25	Bald Cypress	10' RT
26+30	Oklahoma Redbud	104' RT
26+32	Thornless Cockspur Hawthorn	3' RT
26+35	Canaert Juniper	110' RT
26+38	Thornless Cockspur Hawthorn	7' RT
26+39	Canaert Juniper	103' RT
26+45	Thornless Cockspur Hawthorn	3' RT
26+47	Canaert Juniper	109' RT
26+54	Canaert Juniper	106' RT
26+61	Canaert Juniper	110' RT
26+67	River Birch	104' RT
26+73	Prairiefire Crabapple	110' RT
26+80	Prairiefire Crabapple	105' RT
26+88	Prairiefire Crabapple	109' RT
26+97	Shingle Oak	104' RT
27+05	S.W. White Pine	5' RT


TREE STATIONING

STATION	NAME	OFFSET
27+08	Ivory Silk Lilac	108' RT
27+16	Ivory Silk Lilac	108' RT
27+17	S.W. White Pine	10' RT
27+22	Ivory Silk Lilac	103' RT
27+30	S.W. White Pine	11' RT
27+43	S.W. White Pine	6' RT
27+46	River Birch	17' RT
27+47	S.W. White Pine	13' RT
27+58	Oklahoma Redbud	3' RT
27+66	Oklahoma Redbud	6' RT

CAUTION:

VERIFY UTILITIES
PRIOR TO
PLANTING

SCALE: 1" = 20'

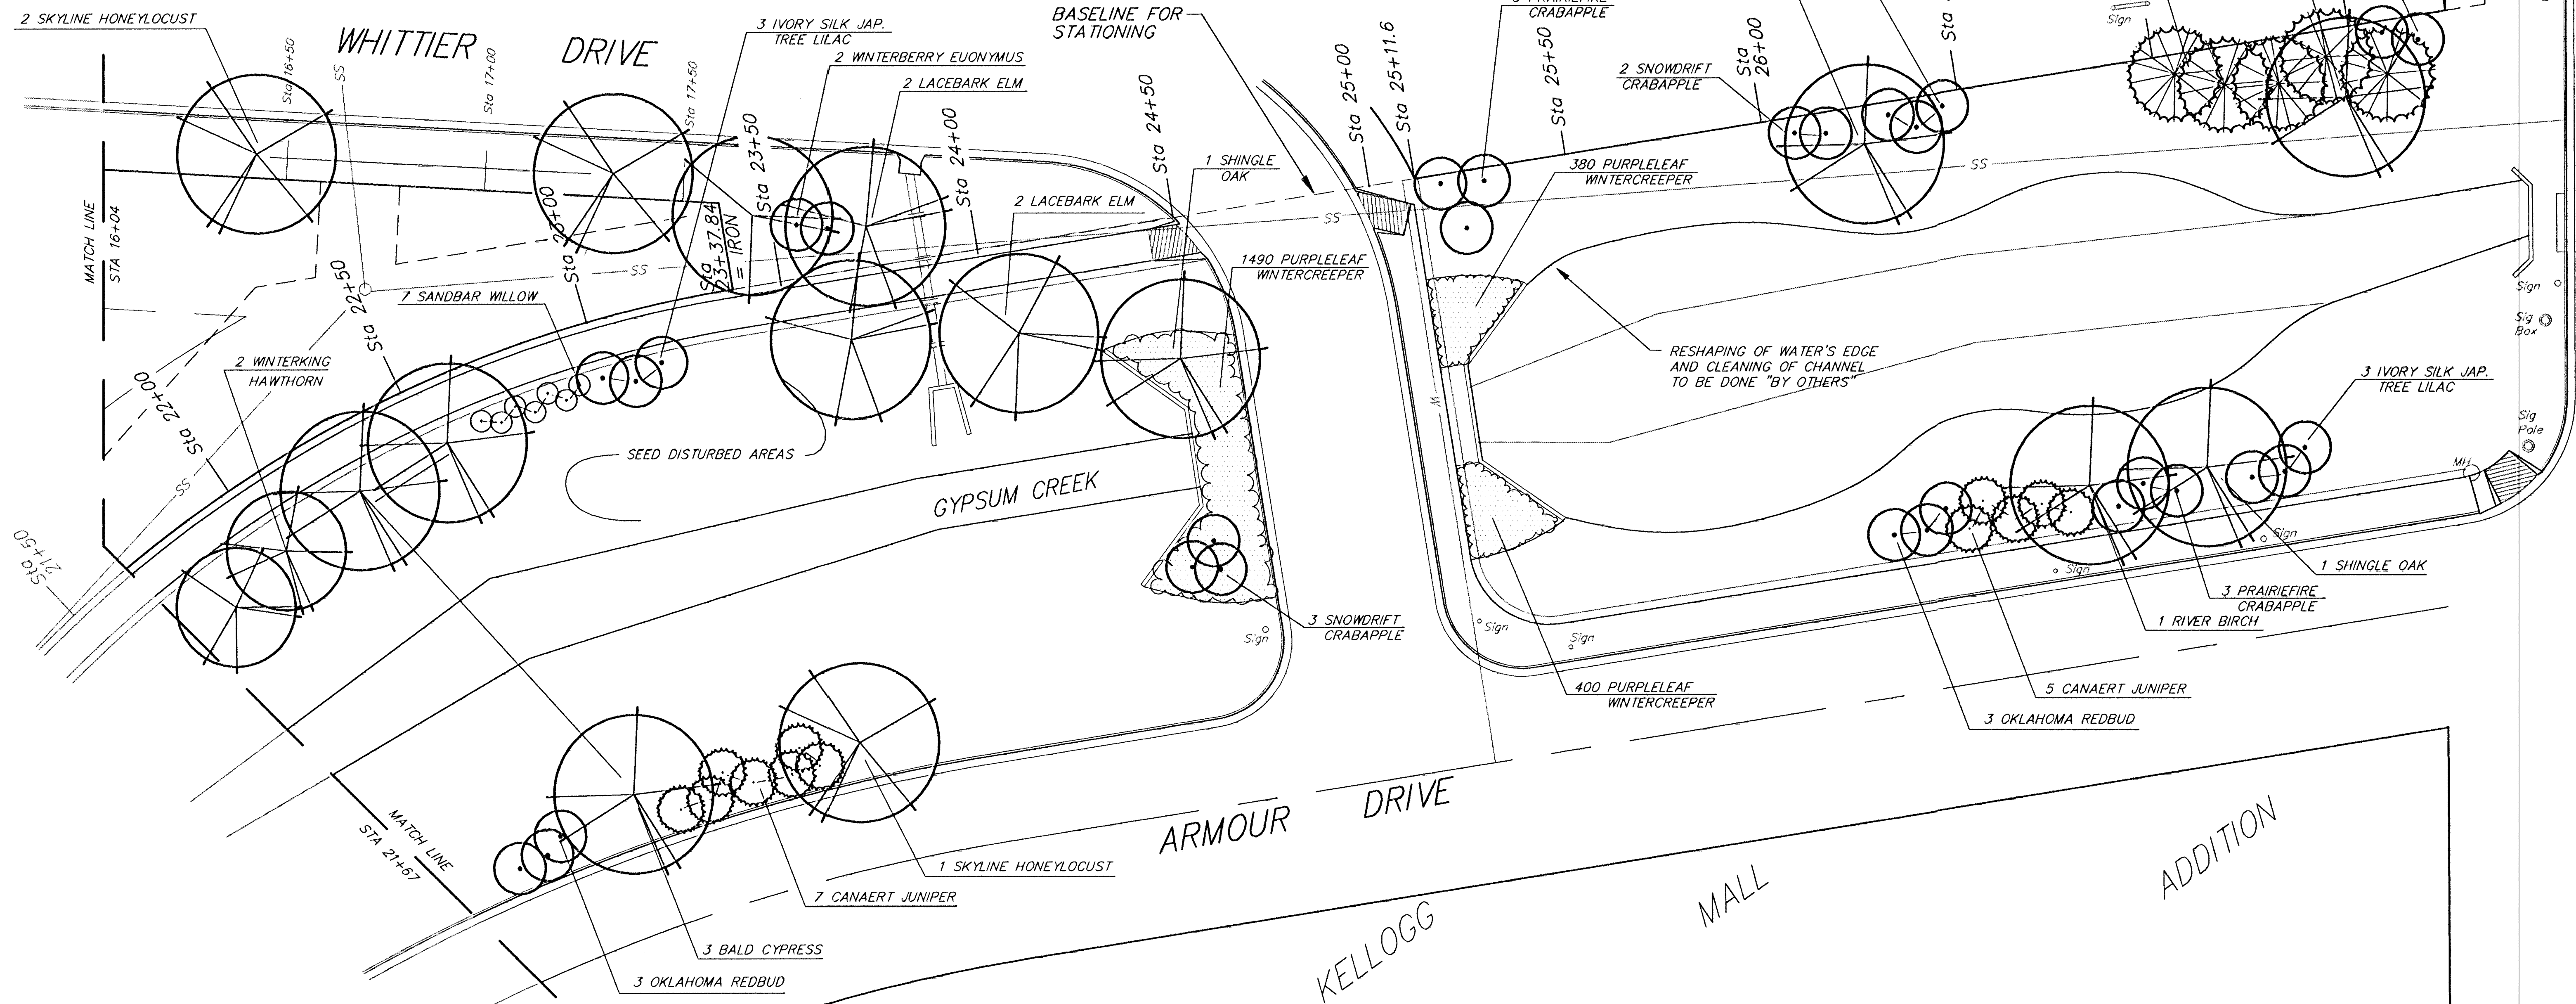

PLANT SCHEDULE (SHEET TOTAL)

QTY.	BOTANICAL NAME	COMMON NAME
2	Betula nigra 'Heritage'	River Birch
3	Gleditsia triacanthos var. inermis 'Skyline'	Skyline Honeylocust
2	Quercus imbricaria	Shingle Oak
4	Taxodium distichum	Bald Cypress
4	Ulmus parvifolia	Lacebark Elm
12	Juniperus virginiana 'Canaert'	Canaert Juniper
5	Pinus strobiformis	Southwestern White Pine

PLANT SCHEDULE (SHEET TOTAL)

QTY.	BOTANICAL NAME	COMMON NAME
8	Cercis reniformis 'Oklahoma'	Oklahoma Redbud
3	Crataegus crusgalli var. inermis	Thornless Cockspur Hawthorn
2	Crataegus viridis 'Winter King'	Winter King Hawthorn
2	Euonymus bungeanus	Winterberry Euonymus
6	Malus 'Prairiefire'	Prairiefire Crabapple
5	Malus 'Snowdrift'	Snowdrift Crabapple
6	Syringa reticulata 'Ivory Silk'	Ivory Silk Tree Lilac
7	Salix interior	Sandbar Willow
2270	Euonymus fortunei var. 'Coloratus'	Purpleleaf Wintercreeper

Revised: July 15, 1996

GYPSUM CREEK BICYCLE PATH
LANDSCAPE PLAN
 STATION 21+87 TO 27+74.7

BAUGHMAN COMPANY P. A.
 ENGINEERING, SURVEYING, & PLANNING
 315-282-7271 • 315 ELLIS • WICHITA, KANSAS 67211

PROJECT NUMBER
472-78-245-82572-000-000-001

DESIGN: [] DRAWN: BAM APPROVED: [] DATE: 5/96 SCALE: 1"=20' SHEET: **6** OF **11**