
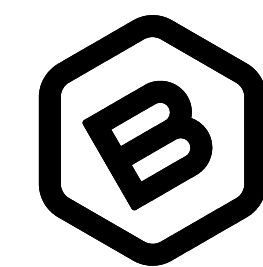


NEW YORK AVE

NY CL CY Excavation (unadjusted)			
Station	Area	Volume	Total
0+50	68.67	0.00	0.00
0+90	51.65	89.13	89.13
1+50	62.39	126.71	215.83
1+89.93	62.95	92.67	308.51
2+50	89.82	169.95	478.45
3+00	105.73	181.06	659.51
3+50	68.11	160.96	820.47
4+00	55.41	114.37	934.84
4+50	86.85	131.72	1066.56
5+00	195.62	261.55	1328.11
5+50	253.37	415.73	1743.84
6+00	270.37	484.95	2228.79
6+50	225.94	459.54	2688.34
7+00	168.26	368.17	3056.50
7+50	156.50	307.43	3363.93
8+00	128.67	265.44	3629.37
8+50	65.05	175.28	3804.65
8+82.18	41.62	62.37	3867.02

NY CL CY Loose Fill (unadjusted)			
Station	Area	Volume	Total
0+50	1.62	0.00	0.00
0+90	2.91	3.35	3.35
1+50	0.00	3.23	6.59
1+89.93	0.00	0.00	6.59
2+50	0.06	0.07	6.66
3+00	0.00	0.06	6.72
3+50	0.17	0.16	6.87
4+00	1.71	1.74	8.61
4+50	1.48	2.95	11.56
5+00	0.00	1.37	12.93
5+50	0.00	0.00	12.93
6+00	0.00	0.00	12.93
6+50	0.00	0.00	12.93
7+00	0.00	0.00	12.93
7+50	0.79	0.57	13.50
8+00	0.00	0.57	14.06
8+50	5.11	5.58	19.64
8+82.18	15.14	13.89	33.53

NY CL CY Compacted Fill (unadjusted)			
Station	Area	Volume	Total
0+50	0.00	0.00	0.00
0+90	0.00	0.00	0.00
1+50	0.00	0.00	0.00
1+89.93	0.00	0.00	0.00
2+50	0.00	0.00	0.00
3+00	0.00	0.00	0.00
3+50	0.00	0.00	0.00
4+00	0.00	0.00	0.00
4+50	0.00	0.00	0.00
5+00	0.00	0.00	0.00
5+50	0.00	0.00	0.00
6+00	0.00	0.00	0.00
6+50	0.00	0.00	0.00
7+00	0.00	0.00	0.00
7+50	0.00	0.00	0.00
8+00	0.00	0.00	0.00
8+50	0.00	0.00	0.00
8+82.18	0.00	0.00	0.00

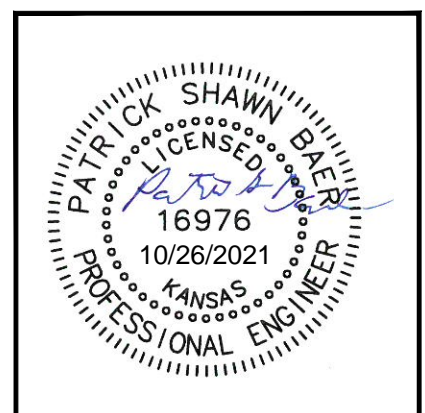

**BAUGHMAN  
COMPANY**

315 Ellis St.  
Wichita, KS 67211  
316-262-7271  
BaughmanCo.com

CORNEJO INDUSTRIAL  
DISTRICT

**CROSS  
SECTIONS**

STREET IMPROVEMENTS  
Street Paving Improvements

PROJECT NUMBER:  
472-2021-085726

DESIGN: PSB DRAWN: HJW

DATE: Oct. 26, 2021

SHEET OF  
**58 62**