

FHWA REG NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	SHEETS
7	KANSAS	472-83084	2000	28	58

GENERAL NOTES

- CONDUIT SHALL BE JACKED OR BORED IF NOT INSTALLED BEFORE PLACING OF NEW PAVEMENT.
- PLACEMENT OF SERVICE/JUNCTION BOXES, CONDUIT RUNS AND CONTROLLER ARE TYPICAL AND MAY BE ADJUSTED AS DIRECTED BY THE ENGINEER TO FACILITATE INSTALLATION.
- THE CONTRACTOR SHALL CONTACT ALL UTILITY COMPANIES WHICH MAY BE AFFECTED BY THE INSTALLATION OF TRAFFIC SIGNALIZATION PRIOR TO ANY CONSTRUCTION.
- K&E POWER POLE STA. 54+84.1, 47' LT. INSTALL METER AND AND POWER DISCONNECT. SEE POWER POLE DETAILS. ADDRESS: 2617 S. SENECA.
- EXISTING SIGNAL APPURTENANCES, EXCEPT AS OTHERWISE NOTED ON THE PLANS, SHALL BE REMOVED BY CONTRACTOR AND TAKEN TO THE CITY YARD. NOTIFY TRAFFIC MAINTENANCE (268-4033) 14 DAYS PRIOR TO START OF CONSTRUCTION.
- CONTRACTOR TO PROVIDE EITHER SCHOOL CROSSWALK SIGNAL OR ADULT CROSSING GUARD FOR SCHOOL CHILDREN CROSSING PROTECTION DURING SCHOOL CHILDREN CROSSING TIME PERIODS. CONTACT ENGINEER FOR APPLICABLE SCHOOL CHILDREN CROSSING TIME PERIODS.
- SEE SHEET 27 FOR ADDITIONAL INSTALLATION DETAILS.

LEGEND

- Advance Flasher on Signal Pedestal with Signs S5-1, & S5-2
- Crosswalk Signal Pole, Mast Arm, and Sign S2-1 Traffic Signal (Type A), 12" on Pole
- Service Box
- Controller
- Pedestrian Indication, 12"
- Junction Box
- Rigid Galvanized Conduit (RGC)
- Meter Box and Power Disconnect

BILL OF MATERIALS (FOR INFORMATION ONLY)		
ITEM	UNIT	QUANTITY
TRAFFIC SIGNAL POLE STEEL W/ MAST ARM	EACH	2
TRAFFIC SIGNAL PEDESTAL	EACH	2
CONCRETE BASE - POLE	EACH	2
CONCRETE BASE - PEDESTAL	EACH	2
SERVICE BOX - 36 IN. DIA.	EACH	2
GROUND ROD & CLAMP	EACH	5
TRAFFIC SIGNAL LAMP 135 WATT	EACH	22
TRAFFIC SIGNAL LAMP 60 WATT	EACH	4
ENTRANCE HEAD	EACH	1
CIRCUIT BREAKER & BOX	EACH	1
TRAFFIC SIGNAL HEAD - 12" (TYPE A) W/MOUNTING BRACKET	EACH	6
PEDESTRIAN SIGNAL HEAD - 12" (TYPE K) W/MOUNTING BRACKET	EACH	2
FLASHER SIGNAL HEAD - 8" W/MOUNTING BRACKET	EACH	2
PEDESTRIAN PUSHBUTTON W/SIGN	EACH	2
POLE MOUNTED CABINET & CONTROLLER SYSTEM-TYPE 170(SEE NOTE)	EACH	1
LEAD-IN WIRE NO. 6 AWG 1/c (TYPE THHN)	LIN. FT.	50
MULTI-CONDUCTOR CABLE NO. 14 AWG 5/c	LIN. FT.	400
MULTI-CONDUCTOR CABLE NO. 14 AWG 3/c	LIN. FT.	305
CONDUIT 1"	LIN. FT.	25
CONDUIT 1-1/4"	LIN. FT.	175
CONDUIT 2"	LIN. FT.	100
STANDARD 1C #8 (TYPE THHN)(GROUND)	LIN. FT.	395
SCHOOL CROSSING SIGN (S2-1) W/MOUNTING HARDWARE	EACH	2
SCHOOL SPEED LIMIT SIGN (S5-1) W/MOUNTING HARDWARE	EACH	2
END SCHOOL ZONE SIGN (S5-2) W/MOUNTING HARDWARE	EACH	2

TYPE 170 TRAFFIC CONTROLLER SYSTEM TO INCLUDE:

ONE (1) MODEL 170 CONTROLLER UNIT COMPLETE WITH 412B2 SYSTEM MEMORY MODULE CAPABLE OF SUPPORTING WAPITI MICRO SYSTEM W4IKS (LATEST REVISION) TRAFFIC PROGRAM ON 27256 EPROM.

ONE (1) MODEL 336 CABINET COMPLETE WITH ALL ACCESSORIES INCLUDING FOUR (4) MODEL 430 TRANSFER RELAYS, TWO (2) MODEL 204 FLASHER UNITS AND ONE (1) MODEL 210MS OR ECL CONFLICT MONITOR.

TWO (2) MODEL 242 TWO CHANNEL ISOLATORS.

TWO (2) MODEL 200 SWITCH PACKS.

NOTE: THE CONTRACTOR SHALL SUPPLY AND INSTALL ALL NECESSARY MATERIAL AND EQUIPMENT FOR THE COMPLETE INSTALLATION AND OPERATION OF THE TRAFFIC SIGNAL WHETHER SPECIFICALLY MENTIONED OR NOT.




CROSSWALK SIGNAL HEAD SUMMARY				
SIGNAL NO.	TYPE	SIZE	MOUNTING BRACKET	QUANTITY
1	A	3-12"	TYPE I	4
2	A	3-12"	ASSEMBLY G*	2
3	K	2-9"	ASSEMBLY G*	2
4	A.W.F.	2-8"	ASSEMBLY H	2

* ONE ASSEMBLY G BRACKET WILL SUPPORT 1 EACH OF TYPE A AND TYPE K HEADS.

TYPE 170 CONTROLLER SETTINGS									
"WAPITI PROGRAM" PHASE								NORMAL DISPLAY	
INTERVAL	1	2	3	4	5	6	7	8	TIME CLOCK
	WB LT	EB	SBLT	NB	-	WB	NBLT	SB	FEATURES
MAX	0	30		30					12 3 4 5 6 7 8
MAX 2	1	30		30					VEH RECALL
WALK	2	8							PED RECALL
FL. DW.	3	20							RED LOCK
MAX INIT.	4	28		30					YEL LOCK
MIN GREEN	5	28		30					Ø PERMIT
TBR	6			10					PED PHASES
TTR	7			10					LEAD PHASES
PASSAGE	8								DBL ENTRY
MIN GAP	9								SEQUENTIAL
ADD ACT	a								START UP YEL
YELLOW	b	3.0		4.0					OVERLAP A
RED CLR.	c			1.5					OVERLAP B
RED REV.	d								OVERLAP C
WALK II	e								OVERLAP D
	f								EXCLUSIVE
									SIM GAP

CROSSWALK SIGNAL POLE SUMMARY					
STATION	TYPE	ARM LENGTH	SIGNALS ON ARM	SIGNALS/EQUIP. ON POLE	SIGNS ON POLE
52+90 R	A				1-G 1-H
53+83 L	B	26'-0"	2-D	1-D, 1-E, 1-C	1-F
53+93 R	B	26'-0"	2-D	1-D, 1-E	1-F
54+74 L	A				1-G 1-H

- A. STANDARD 10' POLE (ALUMINUM)
- B. STANDARD STEEL POLE WITH MAST ARM
- C. CONTROLLER WITH CABINET
- D. TRAFFIC SIGNAL
- E. PEDESTRIAN SIGNAL WITH PUSH BUTTON
- F. SCHOOL CROSSING (S2-1)
- G. SCHOOL SPEED LIMIT (20MPH)(S5-1)
- H. END SCHOOL ZONE (S5-2)

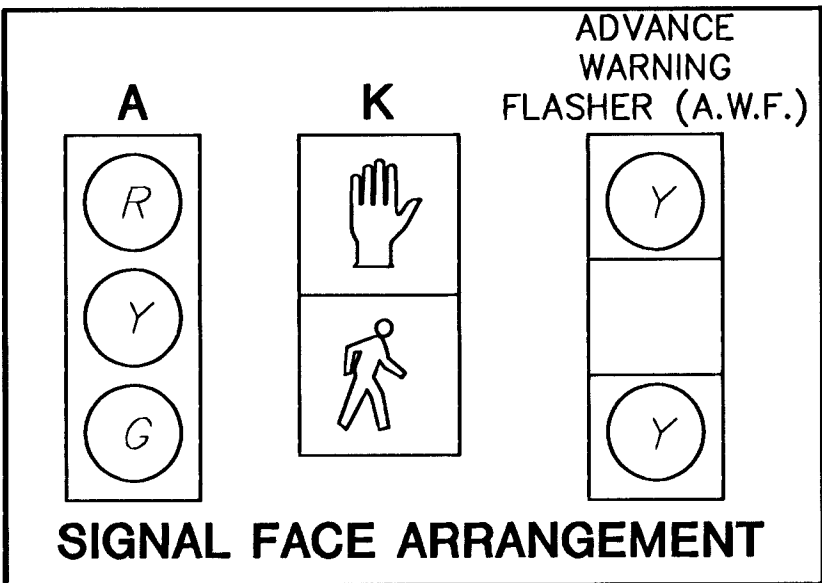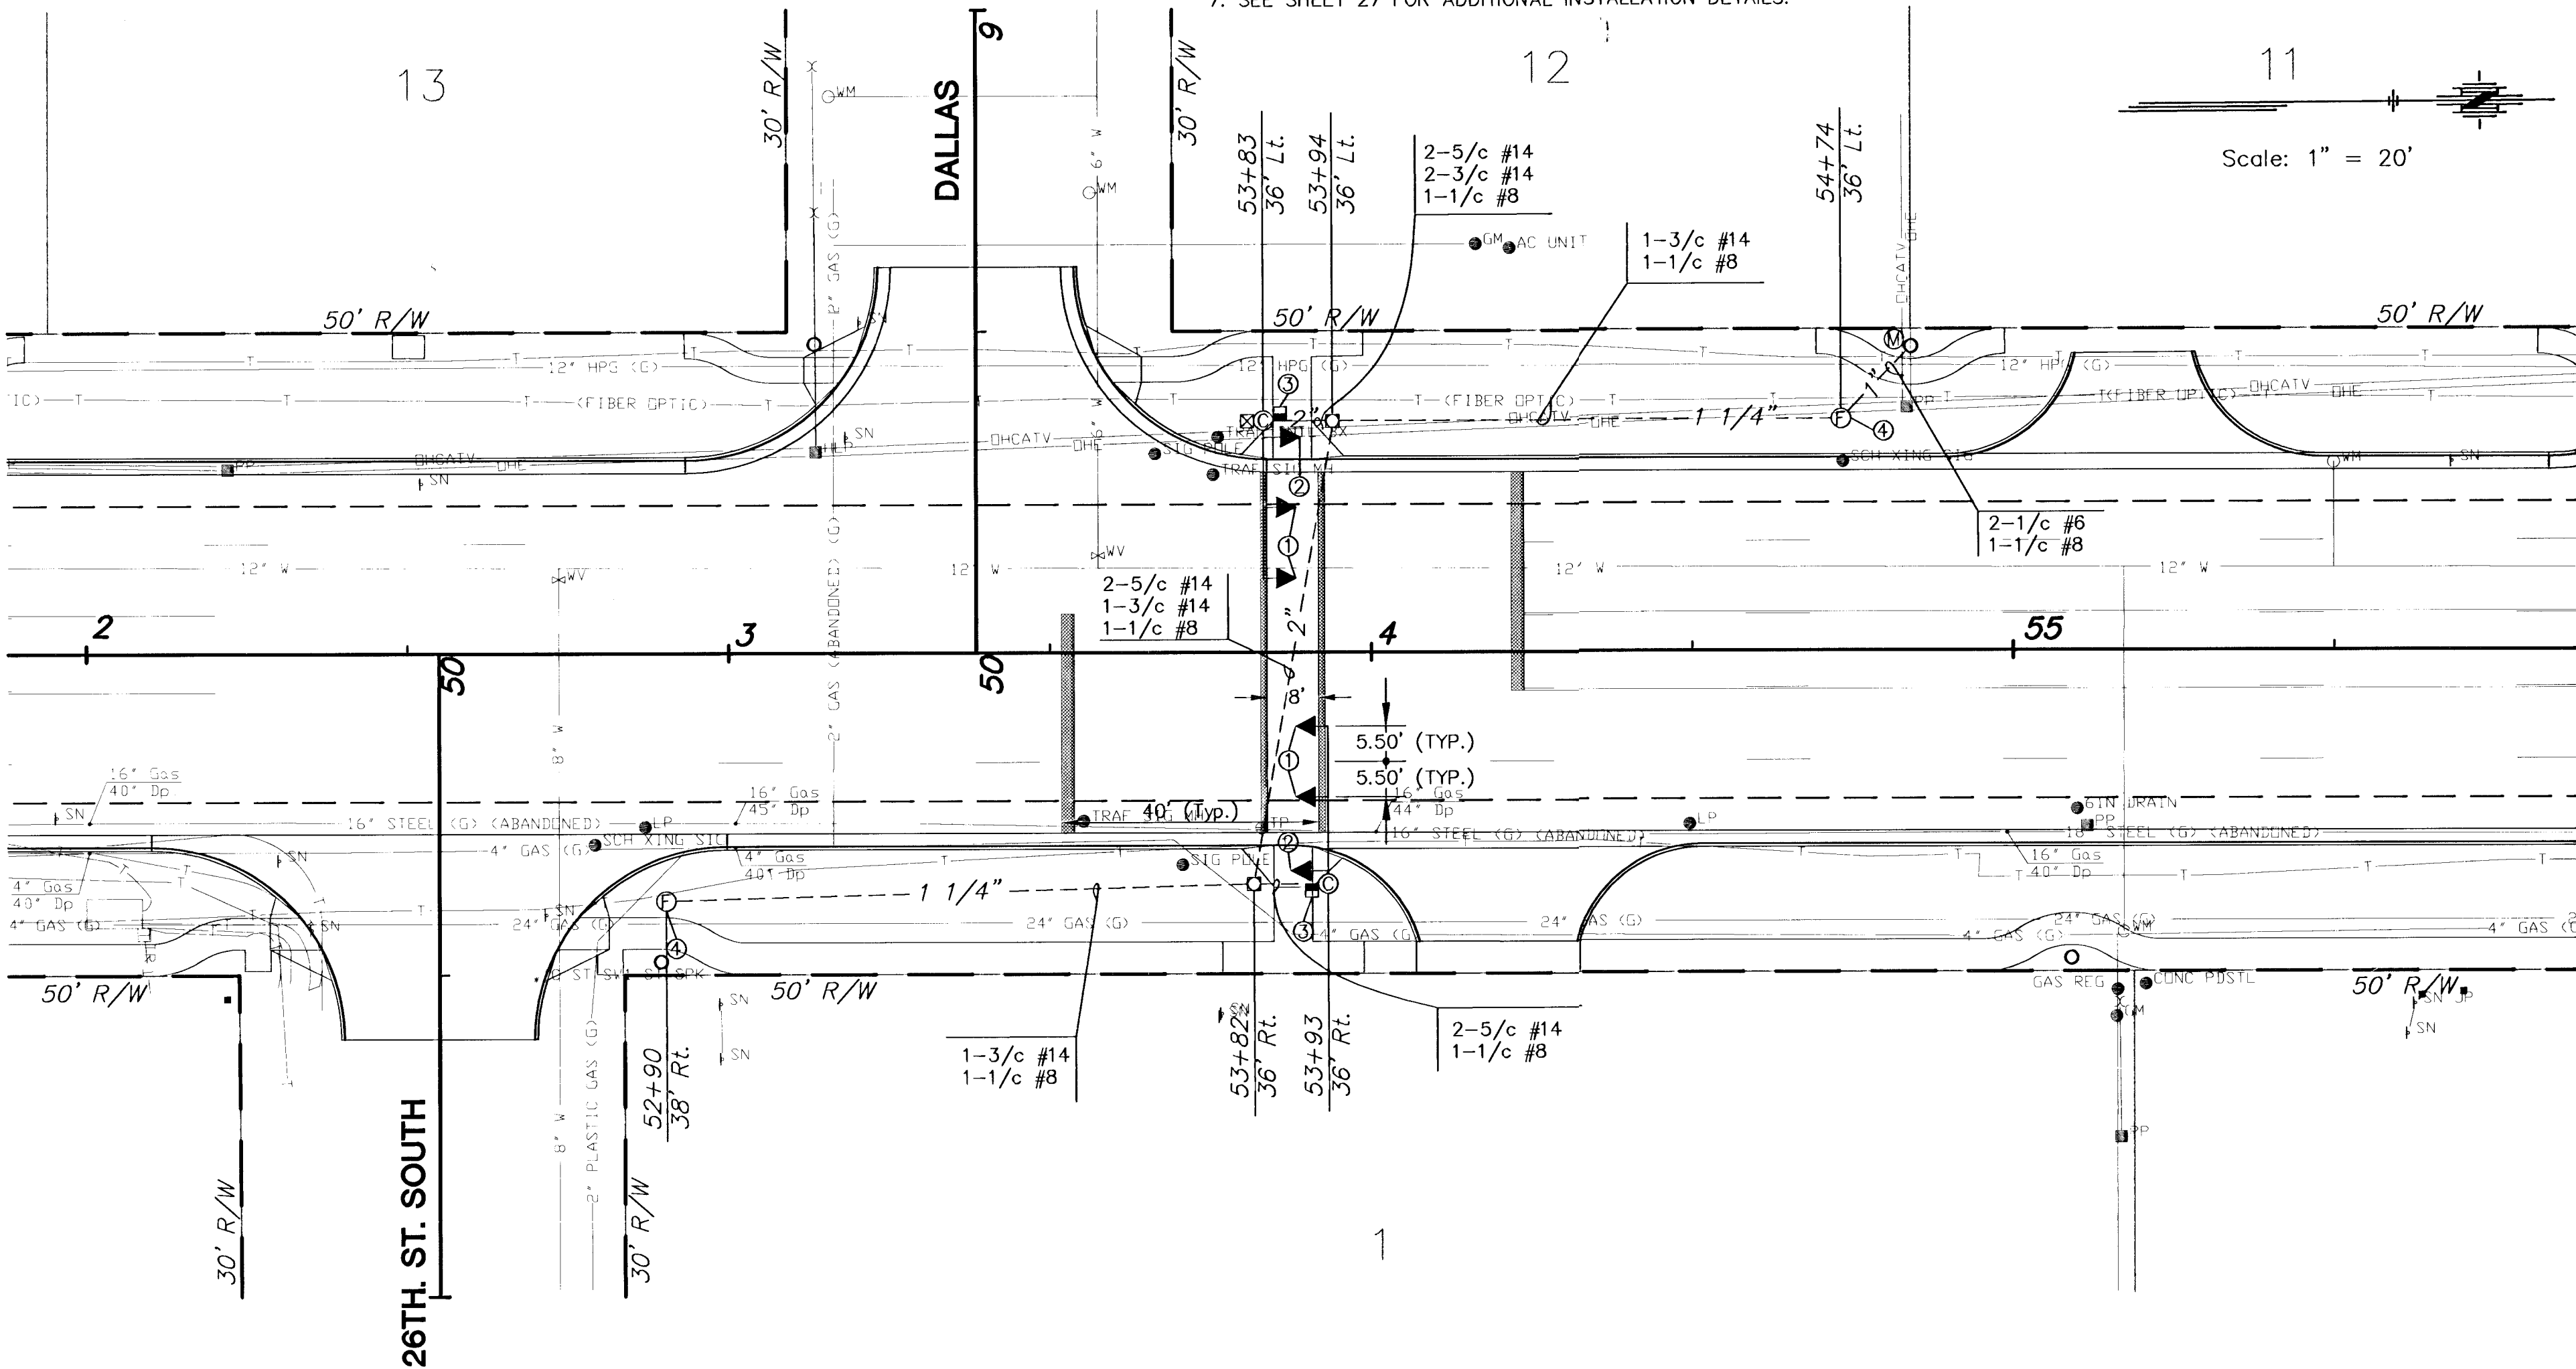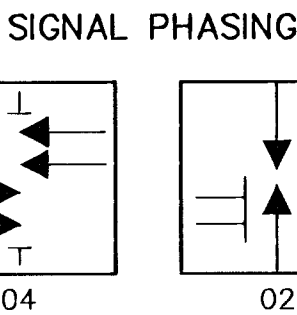

KANSAS DEPARTMENT OF TRANSPORTATION			
SENECA STREET			
CROSSWALK SIGNALIZATION PLAN			
STA. 54+00			
PROJECT NO. 472-83084		SEDGWICK CO.	
MID-KANSAS ENGINEERING CONSULTANTS, INC.			
WICHITA, KANSAS			
DESIGNED BY: DCH		CHECKED BY: DCH	
DRAWN BY: WNJ		DATE: MAY 1, 2000	
		SHEET 28 OF 58	