



TYPICAL 29' B-B PAVEMENT DETAILS

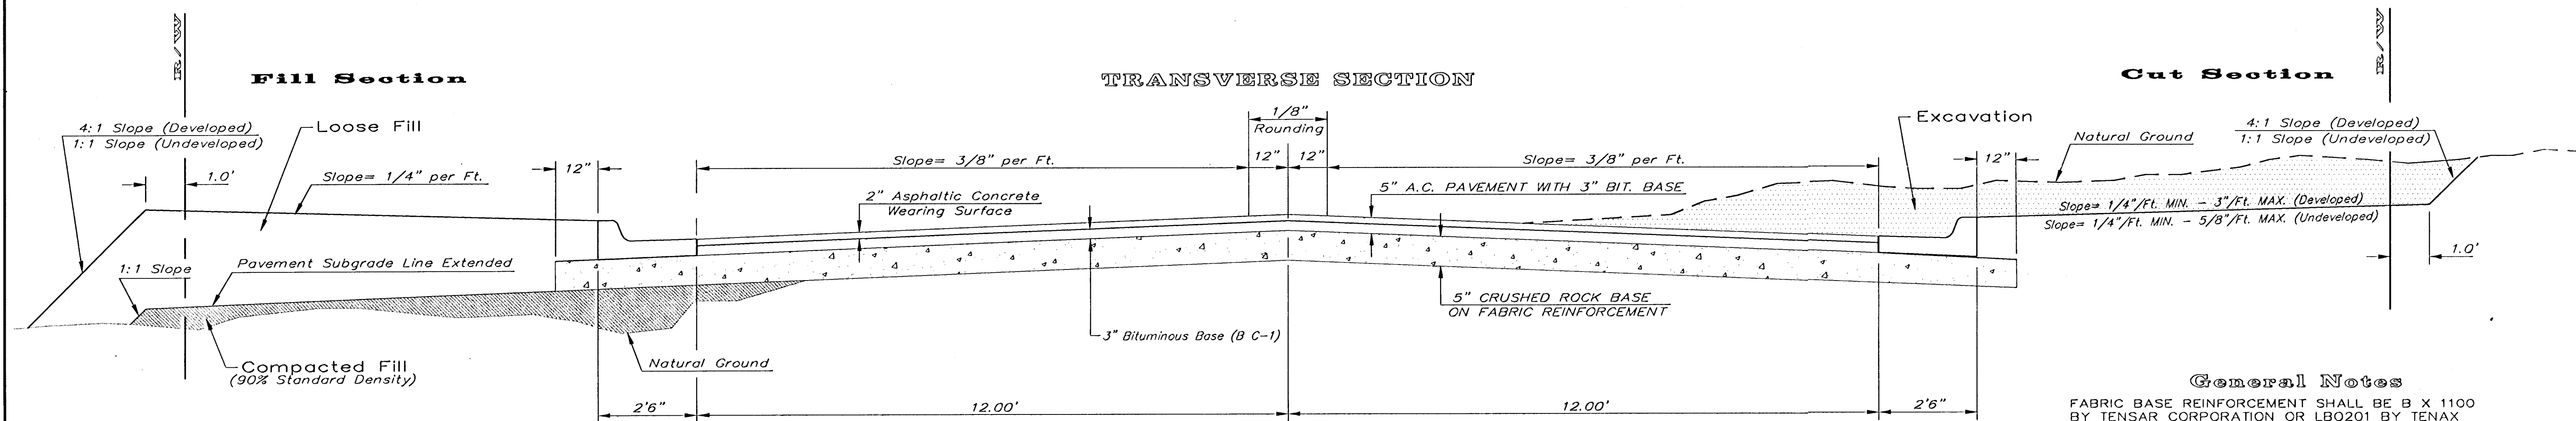


CRUSHED ROCK GRADATION REQUIREMENTS
PERCENT OF AGGREGATE RETAINED

2-1/2"	0
3/4"	20 - 60
#4	50 - 80
#40	80 - 94
#200	90 - 98

ROCK QUALITY SHALL CONFORM TO THE REQUIREMENTS SPECIFIED BY THE KDOT 1990 EDITION STANDARD SPECIFICATION SUBSECTION 1102 FOR DURABILITY CLASS I.

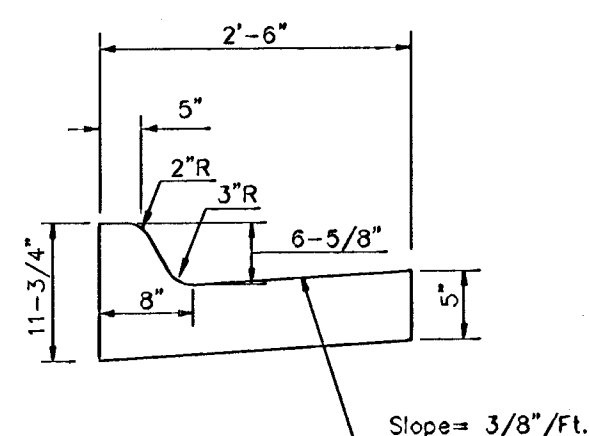


COMBINED CURB & GUTTER

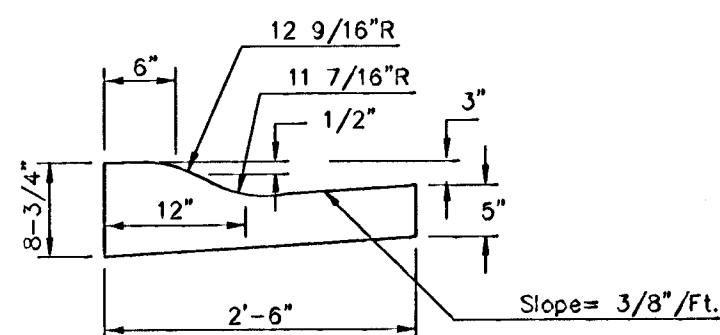

COMBINED ROLL TYPE CURB &
GUTTER

TRANSVERSE SECTION

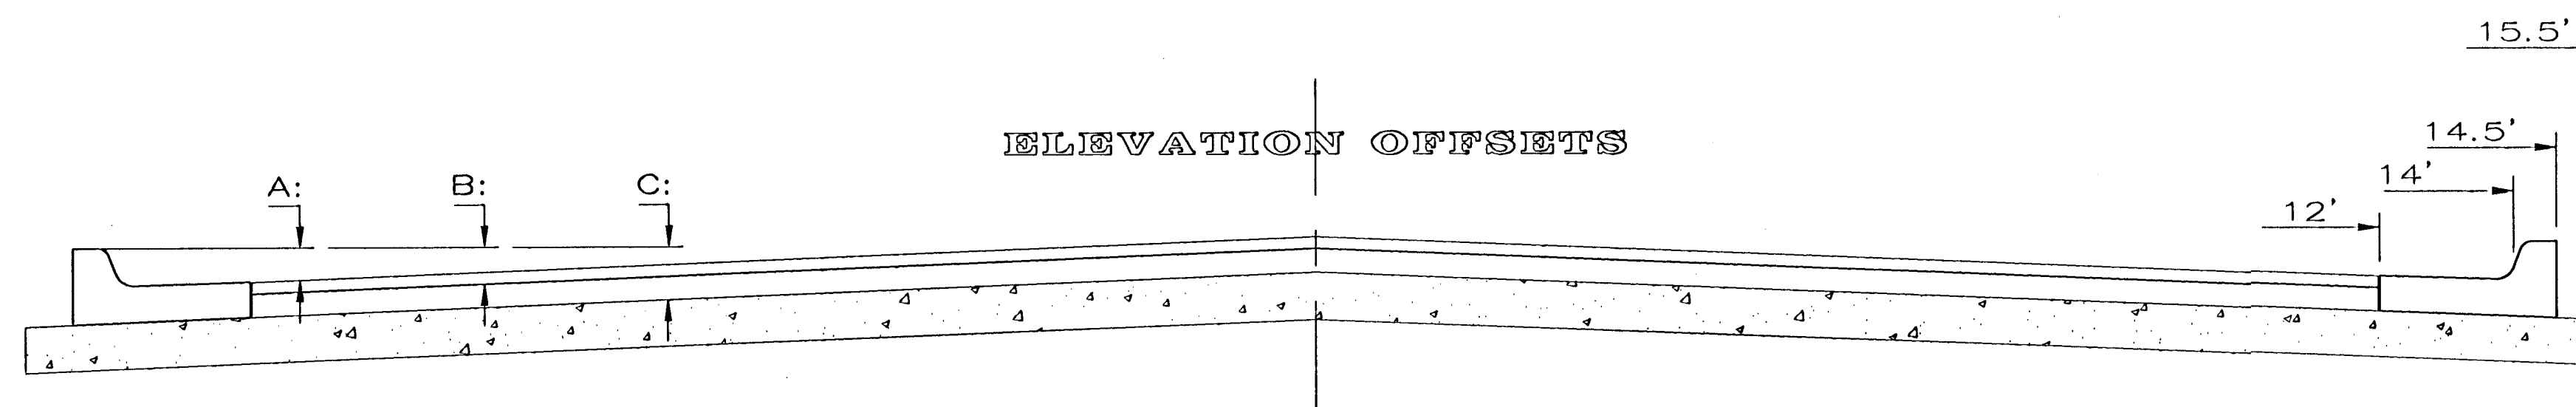


ELEVATION OFFSETS

	DISTANCE FROM CENTERLINE (LT. & RT.)										
	0'	2'	4'	6'	7'	8'	10'	12'	14'	14.5'	15.5'
A: Top of Curbs to Top of Surface Lift	0.13	0.18	0.24	0.30	0.33	0.36	0.43	0.49	—	—	—
B: Top of Curbs to Top of Upper Base Lift	0.30	0.35	0.41	0.47	0.50	0.53	0.60	0.66	—	—	—
C: Top of Curbs to Top of	0.55	0.60	0.66	0.72	0.75	0.78	0.85	0.91	0.97	0.98	1.00

* UNDERDRAIN AGGREGATE
Percent of Aggregate Retained

1"	0
3/4"	0 to 10
3/8"	45 to 80
#4	90 to 100
#8	95 to 100


*Rock Quality Shall Conform To The Requirements Specified
By K.D.O.T. 1990 Edition Standard Specification Subsection
1102 For Durability Class I.*

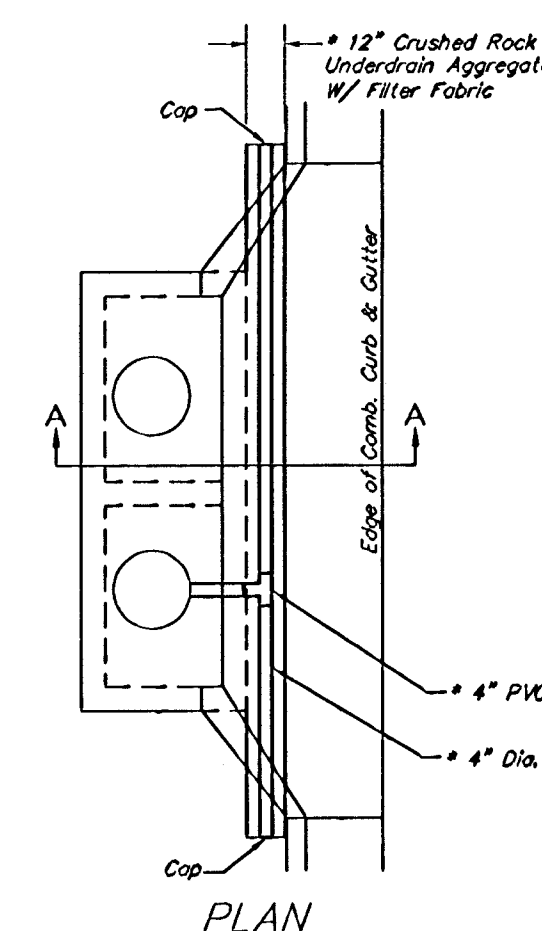

PLAN


PAVEMENT UNDERDRAIN DETAIL
NOT TO SCALE

NOTE: Place 4" PVC Perforated Pipe at all drainage
sump locations.
Cost of Underdrain System to be incidental
to the Reinforced Crushed Rock Subgrade.
Inlet Type May Vary From That Shown.

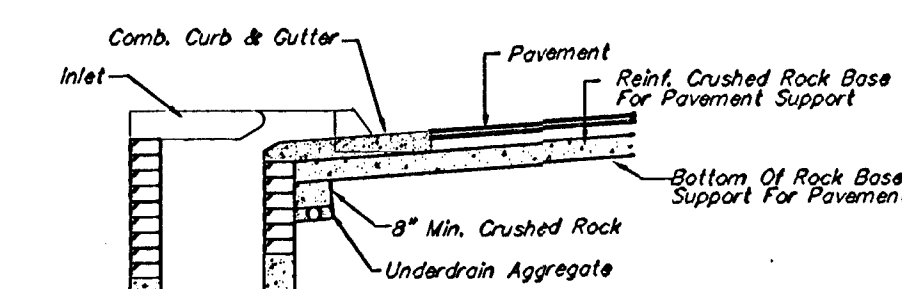

(Min. 16 Perforations Per Lin. Ft. @ 1/4" Dia.)
Perforations To Be on Bottom Half

SECTION A-A

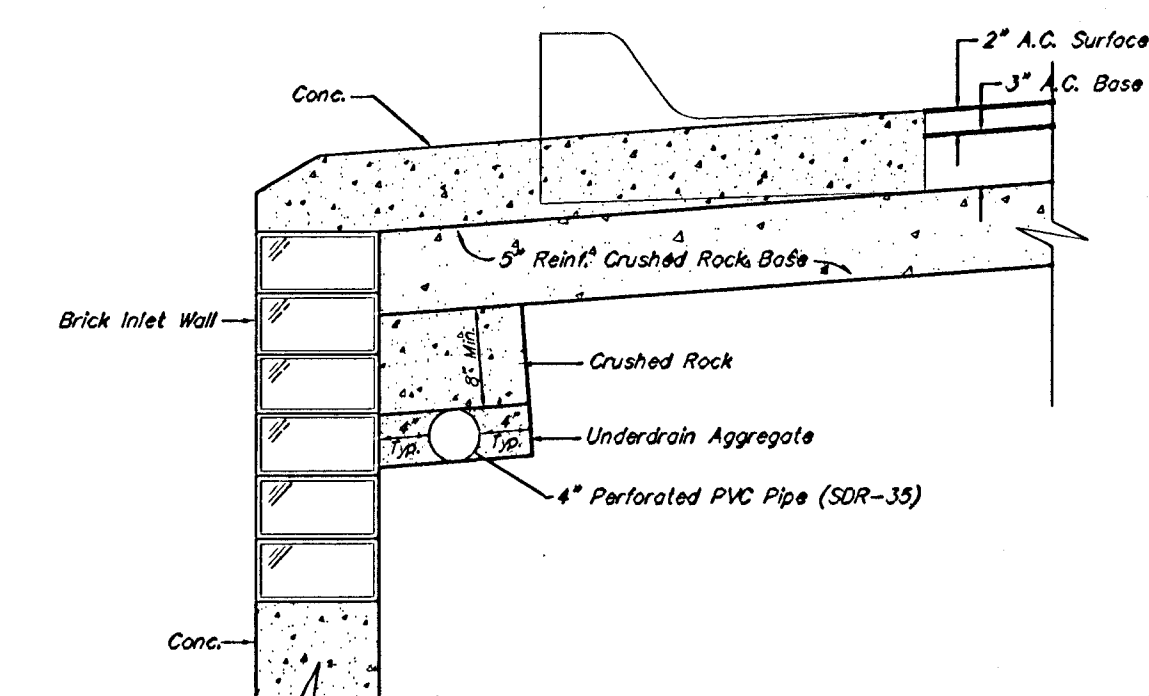

TRENCH DRAIN DETAIL FOR RES. STREETS
NOT TO SCALE

5 INCH Residential Asphaltic Concrete
Pavement w/Crushed Rock Base on Fabric Reinforcement
City of Wichita, Kansas

BAUGHMAN COMPANY P.A.
ENGINEERING, SURVEYING, & PLANNING

318-262-7271 • 315 ELLIS • WICHITA, KANSAS 67201					SHEET 2 OF 17
PROJECT NUMBER -					
DESIGN <i>G.O.W.</i>	DRAWN <i>Staff</i>	APPROVED	DATE <i>07-01</i>	SCALE <i>NONE</i>	

7	.	nt
Auburn 11 \ 29ack 00-05-F721		