STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	E1010-40250621	2022	105	128

4" SLUDGE LINE REPLACEMENT
TO SERVE
WICHITA, KANSAS
4" SLUDGE LINE REPLACEMENT
448–2022–003839 PPW
54092041

INDEX OF SHEETS

105	Cover Sheet
106 - 108	Sludge Plan & Profile Sheets
109	Tracer Wire Detail Sheets

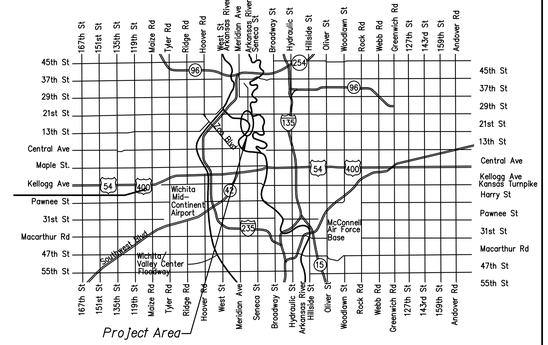

VICINITY MAP

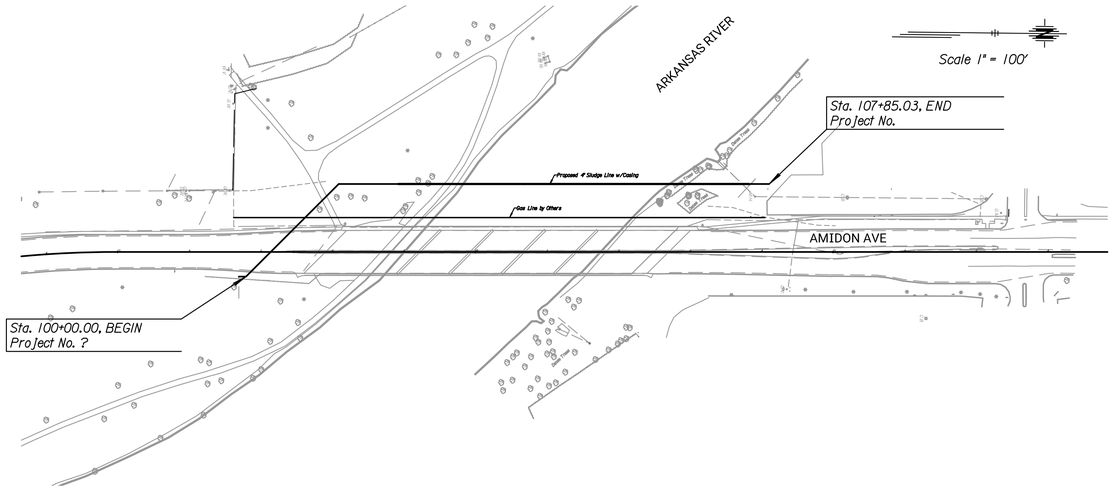

GENERAL NOTES

1. The Contractor will be required to provide a minimum advance notice of forty-eight (48) hours to utility companies prior to excavation or working adjacent to utilities.

   Kansas One-Call 1-800-344-7233

   The following numbers are provided:

   City of Wichita Public Works
   Robert Bigley
   1815 West Pine
   Wichita, KS 67203
   Phone: 316-269-4767
   Emergency Phone: 316-268-4968

   City of Wichita Water Dept.
   Greg Lolley
   455 N. Main
   Wichita, KS 67202
   316-268-4555
   Water Main

   City of Wichita Storm Sewer Dept.
   Kelly Fleming
   455 N. Main
   Wichita, KS 67202
   316-268-4545
   Storm Sewer

   AT&T
   Jason Edwards
   154 N. Broadway
   Room 210
   Wichita, KS 67202
   Phone: 316-268-2008
   Telephone, Fiber Optic

   Evergy
   Zach Laws
   P.O. Box 208
   Wichita, KS 67201
   Phone: 316-261-6264
   Distribution

   Cox Communications
   James Walburn
   901 George Washington Blvd.
   Wichita, KS 67211
   316-260-7491
   Cable Television

   Kansas Gas Service
   Bryan Harkrader
   1021 E. 26th St.
   Wichita, KS 67219
   316-648-3004
   Gas

2. All Sludge Line installation, materials, removals and abandonment shall be in accordance with City of Wichita Specifications.
3. Contractor shall not start work on the project until the Project Inspector is assigned to the project and is present on the site. Any work done without inspection will be required to be uncovered for inspection.
4. Existing utilities shown have been located from field survey and existing City records. Contractor shall field verify location and depth of all utilities.
5. Utility poles where shown on plans may be relocated prior to construction. Contractor shall field verify location. The contractor will be required to work around these poles to complete the work.
6. For the river crossing the Sludge Line Casing pipe shall be HDPE DR 13.5 and the Sludge Line Carrier pipe shall be HDPE DR 7 ductile iron pipe size. All other Sludge Line will be 4" ductile iron pipe.
7. Contractor shall submit an excavation shoring plan sealed by a professional engineer licensed in the state of Kansas to the City of Wichita.
8. Any dewatering, trench boxes, etc. required during construction necessary to complete the project shall be considered SUBSIDIARY to other items of the contract.
9. Any work shown in the plans which is not specifically assigned a line item shall be considered SUBSIDIARY to other items of the contract.
10. The contractor shall give all property owners and/or tenants of property abutting the project limits a minimum of 7 days advance notice prior to the start of adjacent construction and a minimum of 4 hours advance notice to any interruption to sewer service.

APPROVED:

GARY L. JANZEN, P.E.
CITY ENGINEER - WICHITA, KANSAS

DATE:

PREPARED BY
TranSystems
245 N. WACO, SUITE 222
WICHITA, KANSAS 67202
MAIN: 316-303-3000
FAX: 316-462-5629

DATE	BY
	SURVEY
	CADD TECHNICIAN
	DESIGNERS
	SQUAD

Plotted : 7/13/2022
Drawn By : Road
File : c:\transystems\pw_local\transyscorp-pw1\danavarro\d1083517\C-SLUDGE-COV-101.DGN