


| LYNNDALE<br>CY Excavation (unadjusted) |       |        |        | LYNNDALE<br>CY Excavation (unadjusted) |       |        |        |
|--|-------|--------|--------|--|-------|--------|--------|
| Station                                | Area  | Volume | Total  | Station                                | Area  | Volume | Total  |
| 0+60                                   | 15.45 | 0.00   | 0.00   | 10+50                                  | 15.46 | 28.63  | 536.42 |
| 1+00                                   | 15.46 | 22.90  | 22.90  | 11+00                                  | 15.46 | 28.63  | 565.06 |
| 1+50                                   | 15.46 | 28.63  | 51.53  | 11+50                                  | 15.46 | 28.63  | 593.69 |
| 2+00                                   | 15.46 | 28.63  | 80.16  | 12+00                                  | 15.46 | 28.63  | 622.33 |
| 2+50                                   | 15.91 | 29.05  | 109.21 | 12+50                                  | 15.46 | 28.63  | 650.96 |
| 3+00                                   | 16.54 | 30.04  | 139.26 | 13+00                                  | 15.46 | 28.63  | 679.60 |
| 3+50                                   | 14.92 | 29.13  | 168.39 | 13+50                                  | 15.46 | 28.63  | 708.23 |
| 4+00                                   | 13.97 | 26.75  | 195.14 | 14+00                                  | 15.46 | 28.63  | 736.87 |
| 4+50                                   | 13.52 | 25.46  | 220.59 | 14+50                                  | 15.46 | 28.63  | 765.50 |
| 5+00                                   | 13.07 | 24.62  | 245.22 | 15+00                                  | 15.46 | 28.63  | 794.14 |
| 5+50                                   | 12.62 | 23.79  | 269.01 | 15+11.43                               | 15.46 | 6.54   | 800.68 |
| 6+00                                   | 12.17 | 22.96  | 291.97 | 15+36.51                               | 22.80 | 18.66  | 819.34 |
| 6+50                                   | 12.15 | 22.50  | 314.46 | 15+61.59                               | 15.46 | 18.66  | 838.00 |
| 7+00                                   | 13.60 | 23.84  | 338.31 | 16+00                                  | 15.47 | 22.00  | 860.00 |
| 7+50                                   | 15.13 | 26.60  | 364.91 | 16+50                                  | 15.28 | 28.47  | 888.47 |
| 8+00                                   | 15.46 | 28.32  | 393.23 | 16+92.31                               | 13.61 | 22.64  | 911.11 |
| 8+50                                   | 15.46 | 28.63  | 421.86 |  |       |        |        |
| 9+00                                   | 15.48 | 28.64  | 450.51 |  |       |        |        |
| 9+50                                   | 15.46 | 28.65  | 479.15 |  |       |        |        |
| 10+00                                  | 15.46 | 28.63  | 507.79 |  |       |        |        |

| LYNNDALE<br>CY Compacted Fill (unadjusted) |      |        |        | LYNNDALE<br>CY Compacted Fill (unadjusted) |      |        |        |
|--|------|--------|--------|--|------|--------|--------|
| Station                                    | Area | Volume | Total  | Station                                    | Area | Volume | Total  |
| 0+60                                       | 5.75 | 0.00   | 0.00   | 10+50                                      | 5.75 | 10.65  | 119.04 |
| 1+00                                       | 5.75 | 8.52   | 8.52   | 11+00                                      | 5.75 | 10.65  | 129.70 |
| 1+50                                       | 5.75 | 10.65  | 19.18  | 11+50                                      | 5.75 | 10.65  | 140.35 |
| 2+00                                       | 5.75 | 10.65  | 29.83  | 12+00                                      | 5.75 | 10.65  | 151.01 |
| 2+50                                       | 2.79 | 8.61   | 38.44  | 12+50                                      | 5.75 | 10.65  | 161.66 |
| 3+00                                       | 1.13 | 4.08   | 42.53  | 13+00                                      | 5.75 | 10.65  | 172.31 |
| 3+50                                       | 1.06 | 2.09   | 44.62  | 13+50                                      | 5.75 | 10.65  | 182.97 |
| 4+00                                       | 1.20 | 2.10   | 46.72  | 14+00                                      | 5.75 | 10.65  | 193.62 |
| 4+50                                       | 1.27 | 2.28   | 49.00  | 14+50                                      | 5.75 | 10.65  | 204.28 |
| 5+00                                       | 1.33 | 2.41   | 51.41  | 15+00                                      | 5.75 | 8.35   | 212.63 |
| 5+50                                       | 1.40 | 2.53   | 53.93  | 15+11.43                                   | 5.75 | 1.87   | 214.50 |
| 6+00                                       | 1.48 | 2.60   | 56.54  | 15+36.51                                   | 5.75 | 4.11   | 218.60 |
| 6+50                                       | 1.48 | 2.02   | 58.55  | 15+61.59                                   | 5.75 | 4.11   | 222.71 |
| 7+00                                       | 1.25 | 2.53   | 61.09  | 16+00                                      | 5.75 | 6.29   | 228.99 |
| 7+50                                       | 1.03 | 2.12   | 63.20  | 16+50                                      | 1.01 | 4.76   | 233.75 |
| 8+00                                       | 5.75 | 6.28   | 69.49  | 16+92.31                                   | 1.26 | 1.27   | 235.02 |
| 8+50                                       | 5.75 | 10.10  | 79.59  |  |      |        |        |
| 9+00                                       | 5.75 | 8.18   | 87.77  |  |      |        |        |
| 9+50                                       | 5.75 | 9.96   | 97.73  |  |      |        |        |
| 10+00                                      | 5.75 | 10.65  | 108.39 |  |      |        |        |

| LYNNDALE<br>CY Loose Fill (unadjusted) |       |        |        | LYNNDALE<br>CY Loose Fill (unadjusted) |       |        |        |
|--|-------|--------|--------|--|-------|--------|--------|
| Station                                | Area  | Volume | Total  | Station                                | Area  | Volume | Total  |
| 0+60                                   | 5.39  | 0.00   | 0.00   | 10+50                                  | 5.39  | 9.97   | 311.80 |
| 1+00                                   | 5.39  | 7.98   | 7.98   | 11+00                                  | 5.39  | 9.97   | 321.78 |
| 1+50                                   | 5.39  | 9.97   | 17.95  | 11+50                                  | 5.39  | 9.97   | 331.75 |
| 2+00                                   | 5.39  | 9.97   | 27.93  | 12+00                                  | 5.39  | 9.97   | 341.73 |
| 2+50                                   | 8.03  | 11.81  | 39.74  | 12+50                                  | 5.39  | 9.97   | 351.70 |
| 3+00                                   | 9.27  | 15.68  | 55.42  | 13+00                                  | 5.39  | 9.97   | 361.67 |
| 3+50                                   | 10.47 | 18.24  | 73.66  | 13+50                                  | 5.39  | 9.97   | 371.65 |
| 4+00                                   | 11.03 | 19.91  | 93.57  | 14+00                                  | 5.39  | 9.97   | 381.62 |
| 4+50                                   | 11.29 | 20.66  | 114.24 | 14+50                                  | 5.39  | 9.97   | 391.60 |
| 5+00                                   | 11.55 | 21.15  | 135.38 | 15+00                                  | 5.39  | 12.05  | 403.65 |
| 5+50                                   | 11.81 | 21.63  | 157.02 | 15+11.43                               | 7.06  | 3.22   | 406.87 |
| 6+00                                   | 12.19 | 22.26  | 179.28 | 15+36.51                               | 0.08  | 4.04   | 410.91 |
| 6+50                                   | 12.20 | 23.03  | 202.31 | 15+61.59                               | 7.06  | 4.04   | 414.95 |
| 7+00                                   | 11.24 | 21.71  | 224.02 | 16+00                                  | 5.39  | 10.83  | 425.78 |
| 7+50                                   | 10.35 | 20.00  | 244.01 | 16+50                                  | 10.26 | 15.75  | 441.52 |
| 8+00                                   | 5.39  | 14.57  | 258.59 | 16+92.31                               | 11.23 | 17.14  | 458.67 |
| 8+50                                   | 5.39  | 10.47  | 269.06 |  |       |        |        |
| 9+00                                   | 5.39  | 12.20  | 281.26 |  |       |        |        |
| 9+50                                   | 5.39  | 10.60  | 291.85 |  |       |        |        |
| 10+00                                  | 5.39  | 9.97   | 301.83 |  |       |        |        |

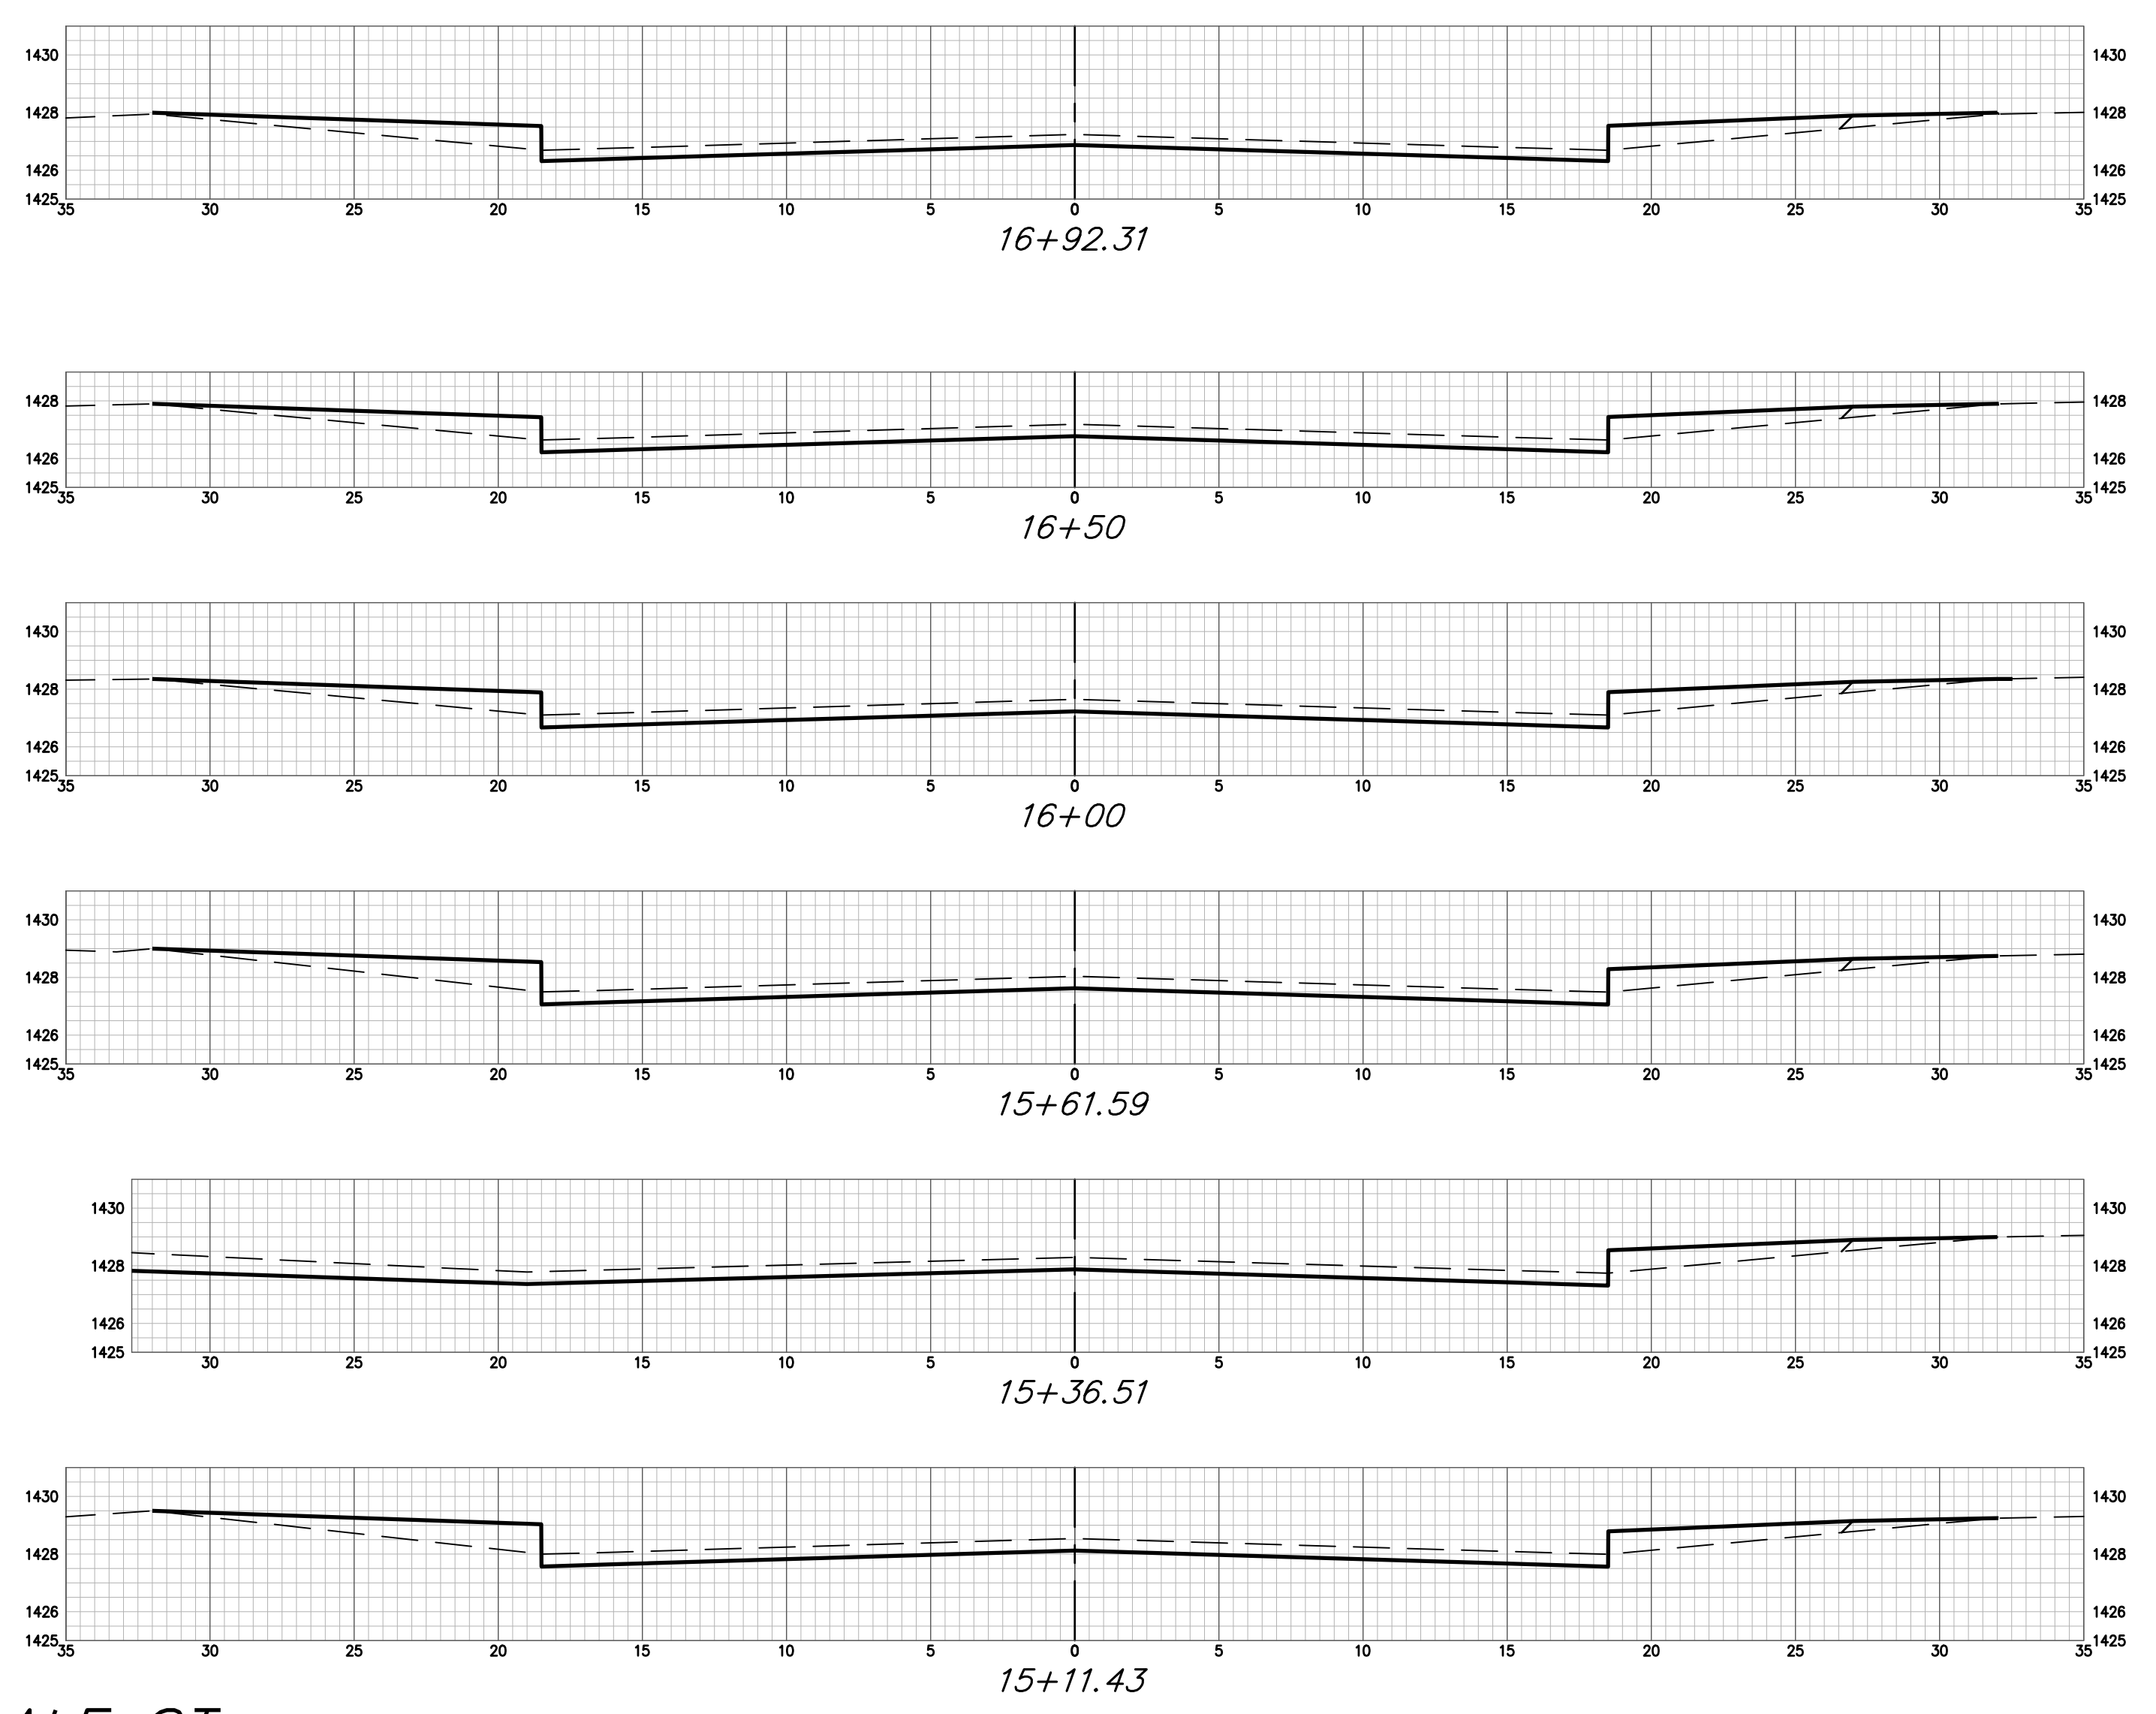

LYNNDALE ST

**BAUGHMAN  
COMPANY**

315 Ellis St.  
Wichita, KS 67211  
316-262-7271  
BaughmanCo.com

ABILENE PLACE ADDITION  
PHASE I

**EARTHWORK  
CROSS  
SECTIONS**

Street Paving Improvements

PROJECT NUMBER:  
472-2021-085724

DESIGN: DMV DRAWN: JAK

DATE: March 6, 2023

SHEET OF  
**21 25**

File: E:\Projects\Abilene Place Addition\_20-03-P540\Engineering\Phase 1\STR\_21-03-EB77\STR\_21-03-EB77.dwg