

NW COR, NE 1/4, SEC. 24, T28S, R1-W Found Sedgwick Co. Cap


NE COR, NE 1/4, SEC. 24, T28S, R1-W Found 1/2" Rebar

SW COR, NE 1/4, SEC. 24, T28S, R1-W Found 1/2" Rebar

SE COR, NE 1/4, SEC. 24, T28S, R1-W Found 1/2" Rebar

Control Points			
Point #	Raw Description	Northing	Easting
1	SECTION CORNER	1656980.82	1636840.65
2	SECTION CORNER	1657016.34	1639500.21
3	SECTION CORNER	1654369.84	1639540.77
4	SECTION CORNER	1654321.45	1636888.98
5	R4-NO CAP	1655368.48	1637533.84
6	R4-KEMPA	1655370.48	1637653.13
7	R4-KEMPA	1655371.55	1637717.12
8	R4-KEMPA	1655373.56	1637837.10
9	R4-KEMPA	1655056.44	1637842.42
10	R5-KEMPA	1655062.48	1638202.87
11	R4-KEMPA	1654345.64	1638214.87
12	R4-KEMPA	1654337.95	1637793.53
13	R4-KEMPA	1654396.38	1637550.83

Paving & SWS Control Points			
Point #	Raw Description	Northing	Easting
301	CL 00+00.00	1655366.01	1637685.21
302	CL 07+57.34	1654608.78	1637697.89
303	CL 09+14.42	1654510.47	1637799.55
304	CL 10+14.92	1654512.15	1637900.04
305	CL 11+72.00	1654613.81	1637998.35
306	CL 13+10.17	1654751.97	1637996.04
307	CL 14+67.25	1654850.28	1637894.38
308	CL 16+67.75	1654846.92	1637693.90
309	CL 20+00.00	1655400.64	1637543.28
310	CL 26+64.03	1654736.72	1637554.88
311	CL 27+23.69	1654699.38	1637593.51
312	CL 28+26.54	1654701.11	1637696.35
313	0+00.00 SWS1	1655060.93	1637887.10
314	0+58.43 SWS1	1655019.11	1637846.29
315	2+07.37 SWS1	1654868.69	1637848.81
316	2+48.72 SWS1	1654830.35	1637849.45
317	5+45.54 SWS1	1654530.56	1637854.48
318	5+87.40 SWS1	1654492.34	1637861.63
319	1+36.41 SWS2	1654804.25	1637713.79
320	1+77.86 SWS2	1654800.77	1637675.50

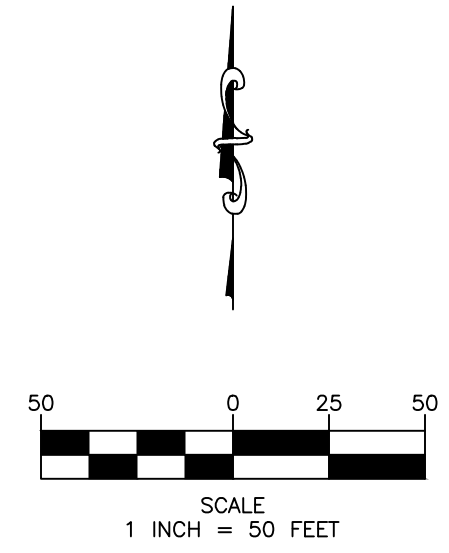

Fox Run 2nd Addition
Control Map
Wichita, Kansas

KEMILLER ENGINEERING
117 E. Lewis, Wichita, KS 67202 (316)264-0242

KEM PROJ. 21036	DATE 02.2023	SHEET 2.0
DESIGN KEM	DRAWN ZJS	

February 13, 2023