

BENCHMARKS:



BM #1: Square cut/cross on curb inlet near the SE corner of Lot 1, Block D, Castlegate 3rd Addition.
Elev. = 1342.69 (NAVD88)

BM #2: Square cut/cross on curb inlet near the SW corner of Lot 11, Block B, Castlegate 3rd Addition.
Elev. = 1343.08 (NAVD88)

WATER VALVE LOCATION TABLE

VALVE NUMBER	STREET	BASELINE STATION	OFFSET DISTANCE	OFFSET DIRECTION
V3	Thornton Ct.	0+97.83	46.86'	Rt.

Paving contractor will be responsible to operate all water valves on the project, in the presence of the inspector, to ensure accessibility to the valves, and that all valves (except blowoffs) are left in the "ON" position when the project is completed.

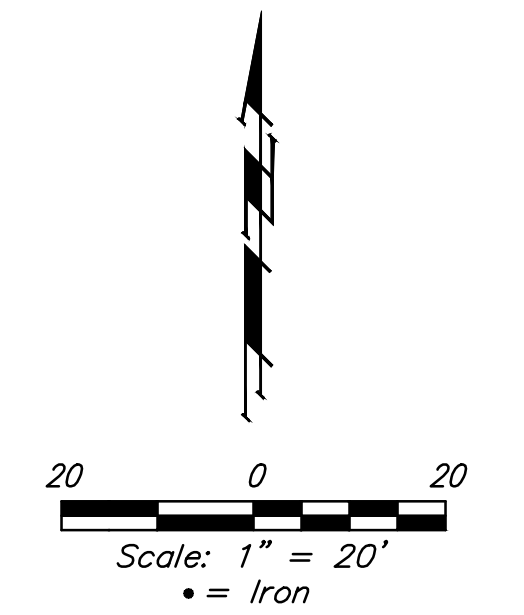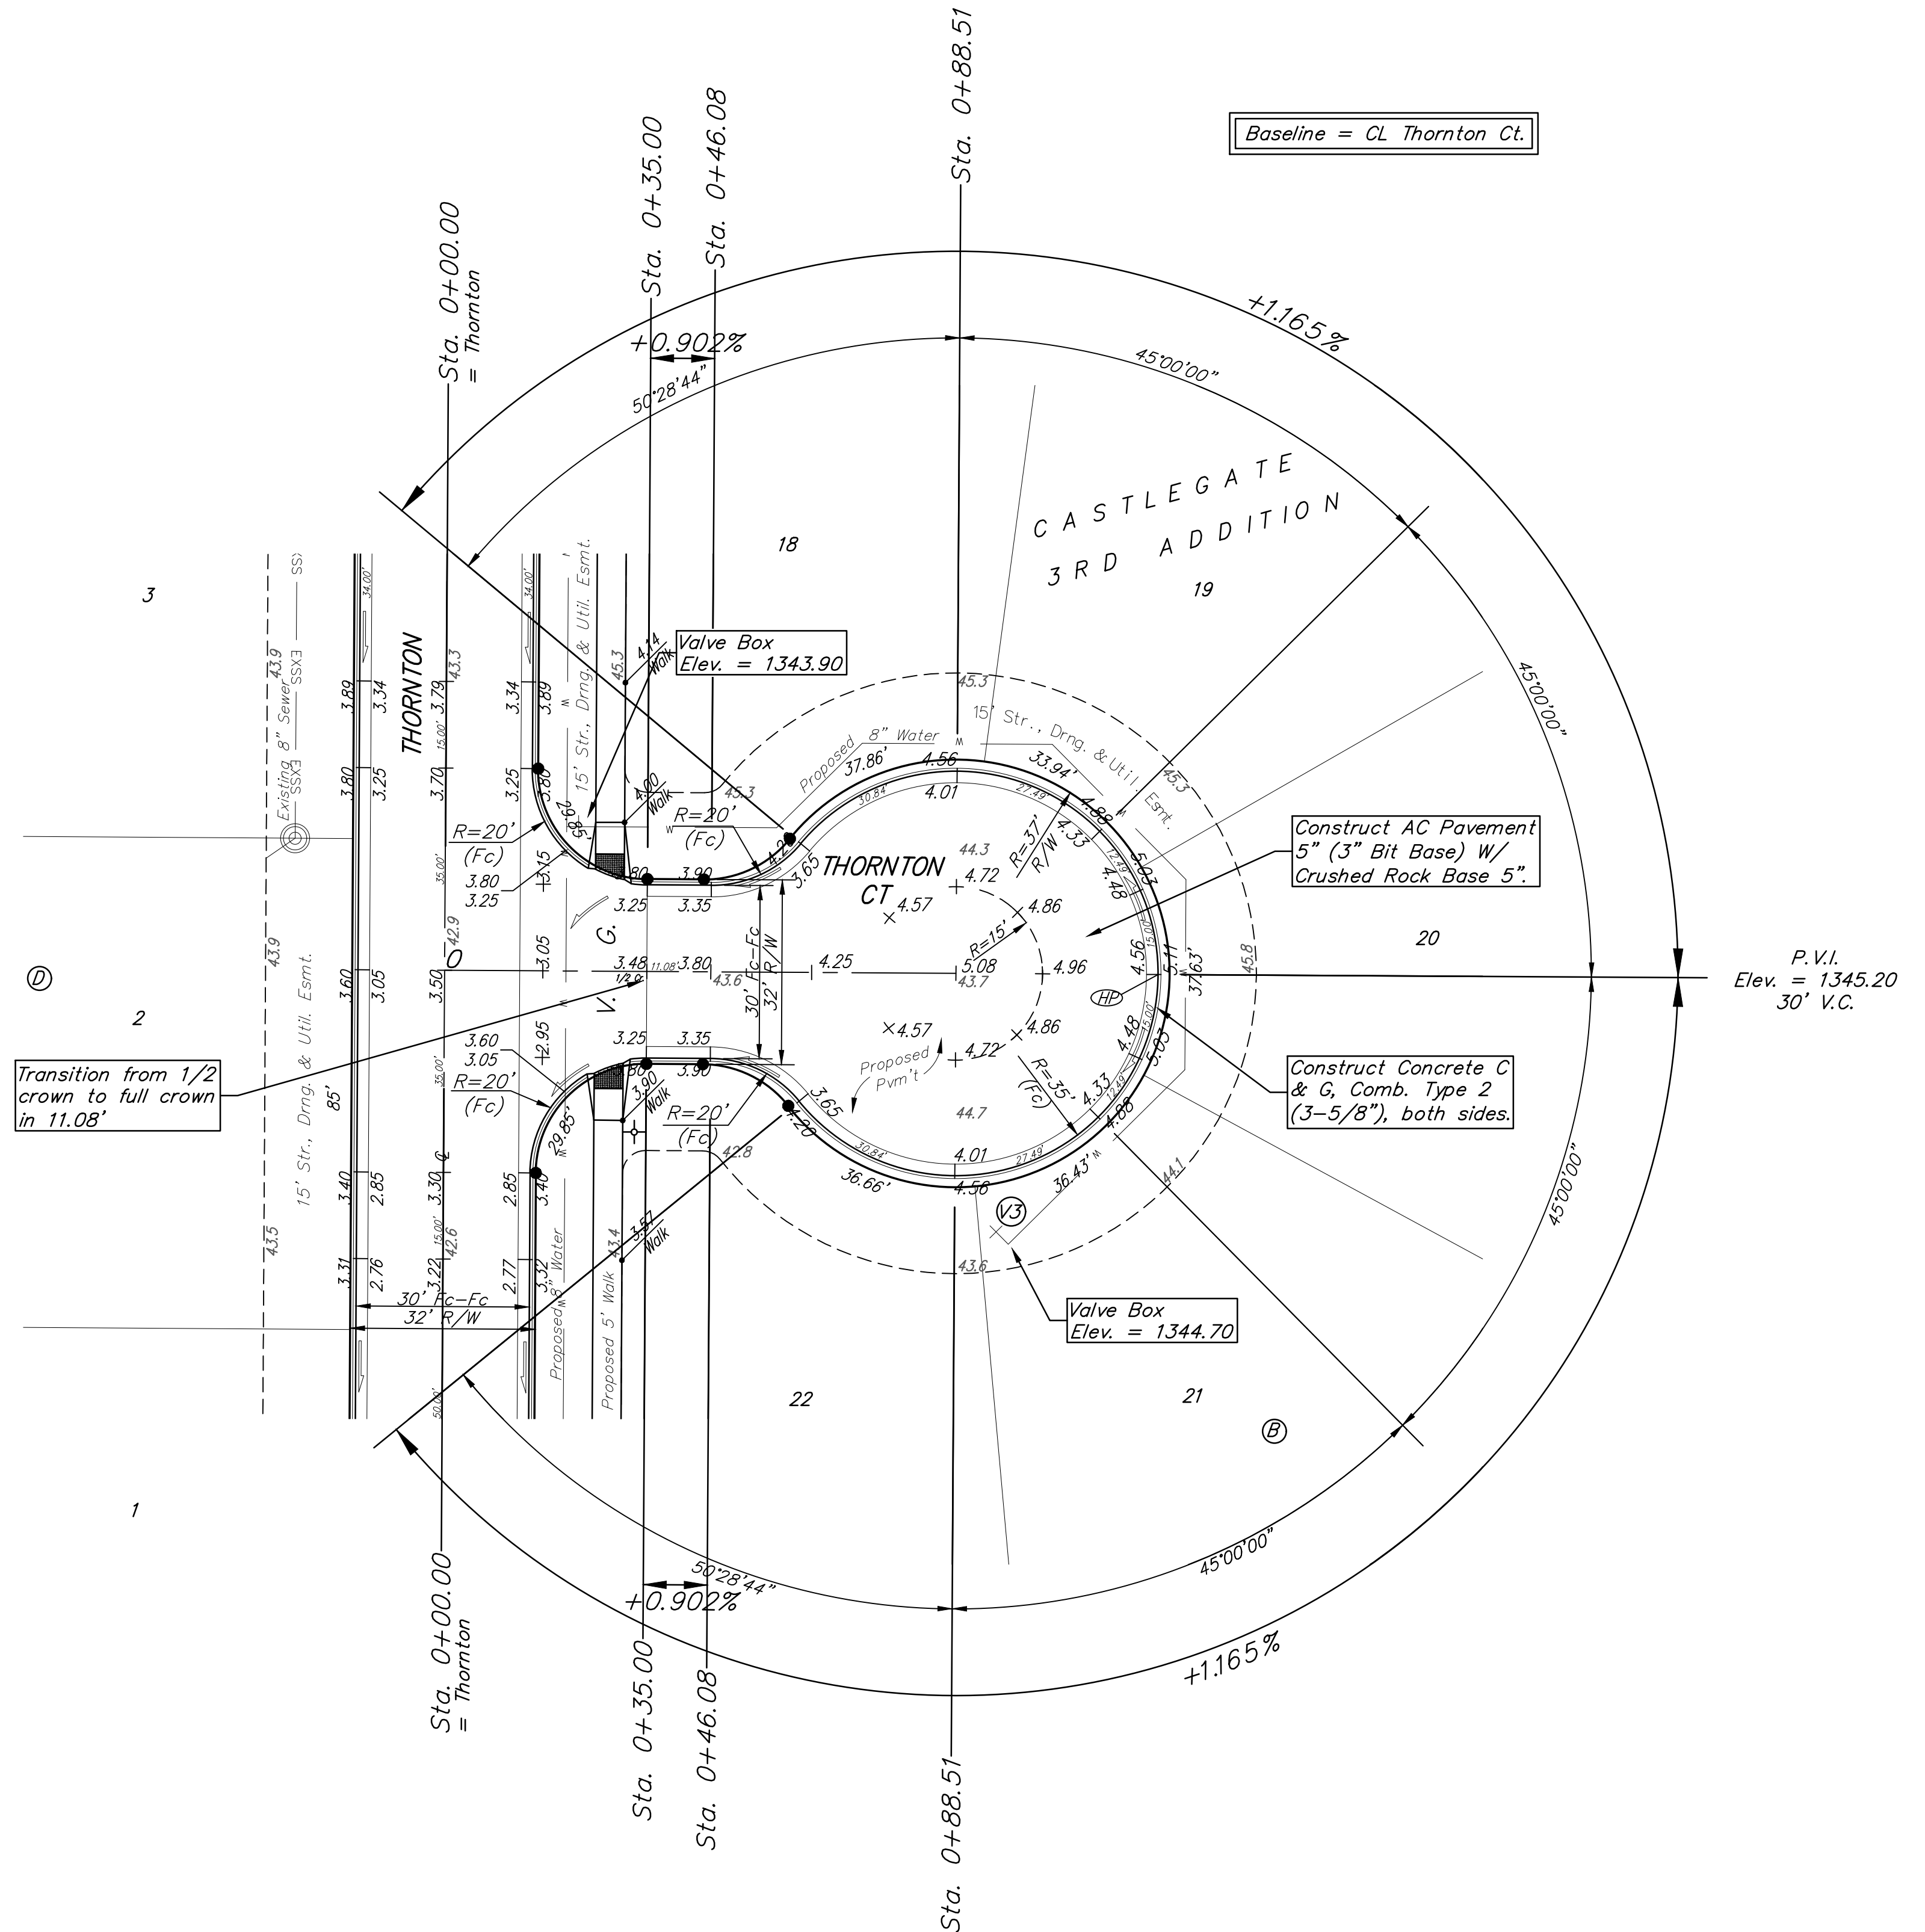

Transition from 1/2 crown to full crown in 11.08'

NOTE: ROLL TYPE CURB & GUTTER (TYPE 2) TO BE CONSTRUCTED ON THE PAVEMENT SHOWN ON THIS SHEET. TOP OF CURB ELEVATIONS ARE GIVEN FOR FULL HEIGHT CURB (TYPE 4).



BAUGHMAN COMPANY
315 Ellis St.
Wichita, KS 67211
316-262-7271
BaughmanCo.com

CASTLEGATE 3RD ADD.
Phase 2

**THORNTON CT.
LOTS 18-22,
BLOCK B**
STREET
IMPROVEMENTS

PROJECT NUMBER:
22-08-E278

DESIGN: NBW DRAWN: TMS
DATE: May 16, 2023

SHEET 4 OF 23

File: E:\Projects\Castlegate 3rd Addition_18-12-P423\Engineering\Phase 2\Streets 22-08-E278\Streets.dwg