


BENCHMARK:  
City of Wichita Std. disc  
SW corner of the  
intersection of 135th St. W.  
and 21st St. N.  
Elevation = 1356.59  
NGVD29

Scale: 1" = 40' Horizontal  
1" = 5' Vertical  
= Iron

Sta 0+00.0, Begin Line 1  
Core into existing manhole. Extend  
8" pipe southwest. Install Out-side  
Drop. Seal and grout around pipe.  
Reshape invert if necessary. Cost  
of coring, sealing, grouting, and  
reshaping to be incidental to cost  
of pipe.

12' ACCESS & UTILITY ESM'T.  
MEMORANDUM OF LEASE (FILM  
2055, PAGE 1036)

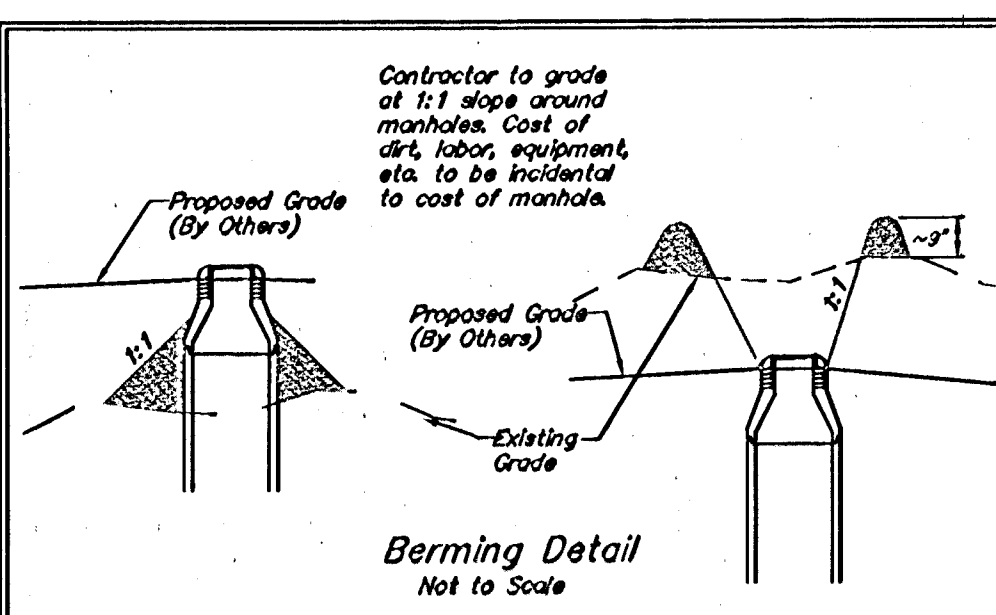

Sta 1+35.04, Line 1  
Construct std.  
manhole.  
Rim Elev. = 1351.00

Sta. 1+35 to Sta. 5+63, Line 1,  
Sanitary Sewer trench shall be  
sand backfilled and flushed.

Sta. 0+18 to 0+68  
Install 50.0 l.f. flowable fill  
per City Specs. Top Elev.  
= 1346.50

Sta 0+91.57, Line 1A  
Construct std.  
manhole.  
1 - 4" Stub (W)  
Rim Elev. = 1350.00

Sta 7+01.89, Line 1  
Construct std.  
manhole.  
1 - 4" Stub (SW)  
Rim Elev. = 1352.00

Contractor to remove trees, fence, signs,  
poles, etc. as needed for sanitary sewer  
construction. Removal of items shall be  
incidental to "Site Clearing and Restoration".

**Baughman** Eberly Farm Office Park  
**Sanitary Sewer  
Line 1**  
Sanitary Sewer Improvements

Baughman Company, P.A. 315 Ellis & Wilson, KS 67211 P316202771 F316202049  
ENGINEERING | SURVEYING | PLANNING | LANDSCAPE ARCHITECTURE

|                             |                |               |
|-----------------------------|----------------|---------------|
| PROJECT NUMBER<br>468-84109 | DESIGN<br>MWS  | DRAWN<br>MWS  |
| REVISIONS                   | APPROVED       | DATE<br>12/05 |
|                             | SCALE<br>Noted |               |
|                             | SHEET          | <b>2 OF 8</b> |

E:\eng\Eberly Farm\ss1.dwg 05-11-E408