

BENCHMARK
119th St. W. & Pawnee
City of Wichita Benchmark Disc.
NE corner of intersection. 40' E
and 30' N of centerline. 59.5' N of
power pole @ SE corner of
intersection. 156.8' NNE of
centerline of E concrete headwall on
culvert under 119th St. W.
Elev. = 148.68 (City Datum)
Elev. = 1,336.08 (N.G.V.D.29)

Sta. 0+00, Begin Line 1
= Sta. 0+00, Line 4
Connect to Existing 10" Stub
and Extend 10" Pipe N.E.
Contractor to Verify Depth
and Location of Existing
Stub Prior to Construction.

Pond data:
Static ws elev. = 132.0
100-yr ws elev. is
Variable along reach

Sta. 2+62.7, Line 1
Construct Standard
Manhole.
Top Elev. = 142.40

Sta. 3+69.8, Line 1
= Sta. 0+00, Line 2
Construct Standard
Manhole.
Top Elev. = 142.80


Sta. 6+16.8, Line 1
Construct Standard
Manhole.
Top Elev. = 141.90

Sta. 8+28.2, Line 1
Construct Standard
Manhole.
Top Elev. = 141.60
Match Point

SCALE:
1" = 40' HORIZONTAL
1" = 5' VERTICAL
• = IRON

TURKEY CREEK 2ND ADDITION

TURKEY CREEK 2ND ADDITION

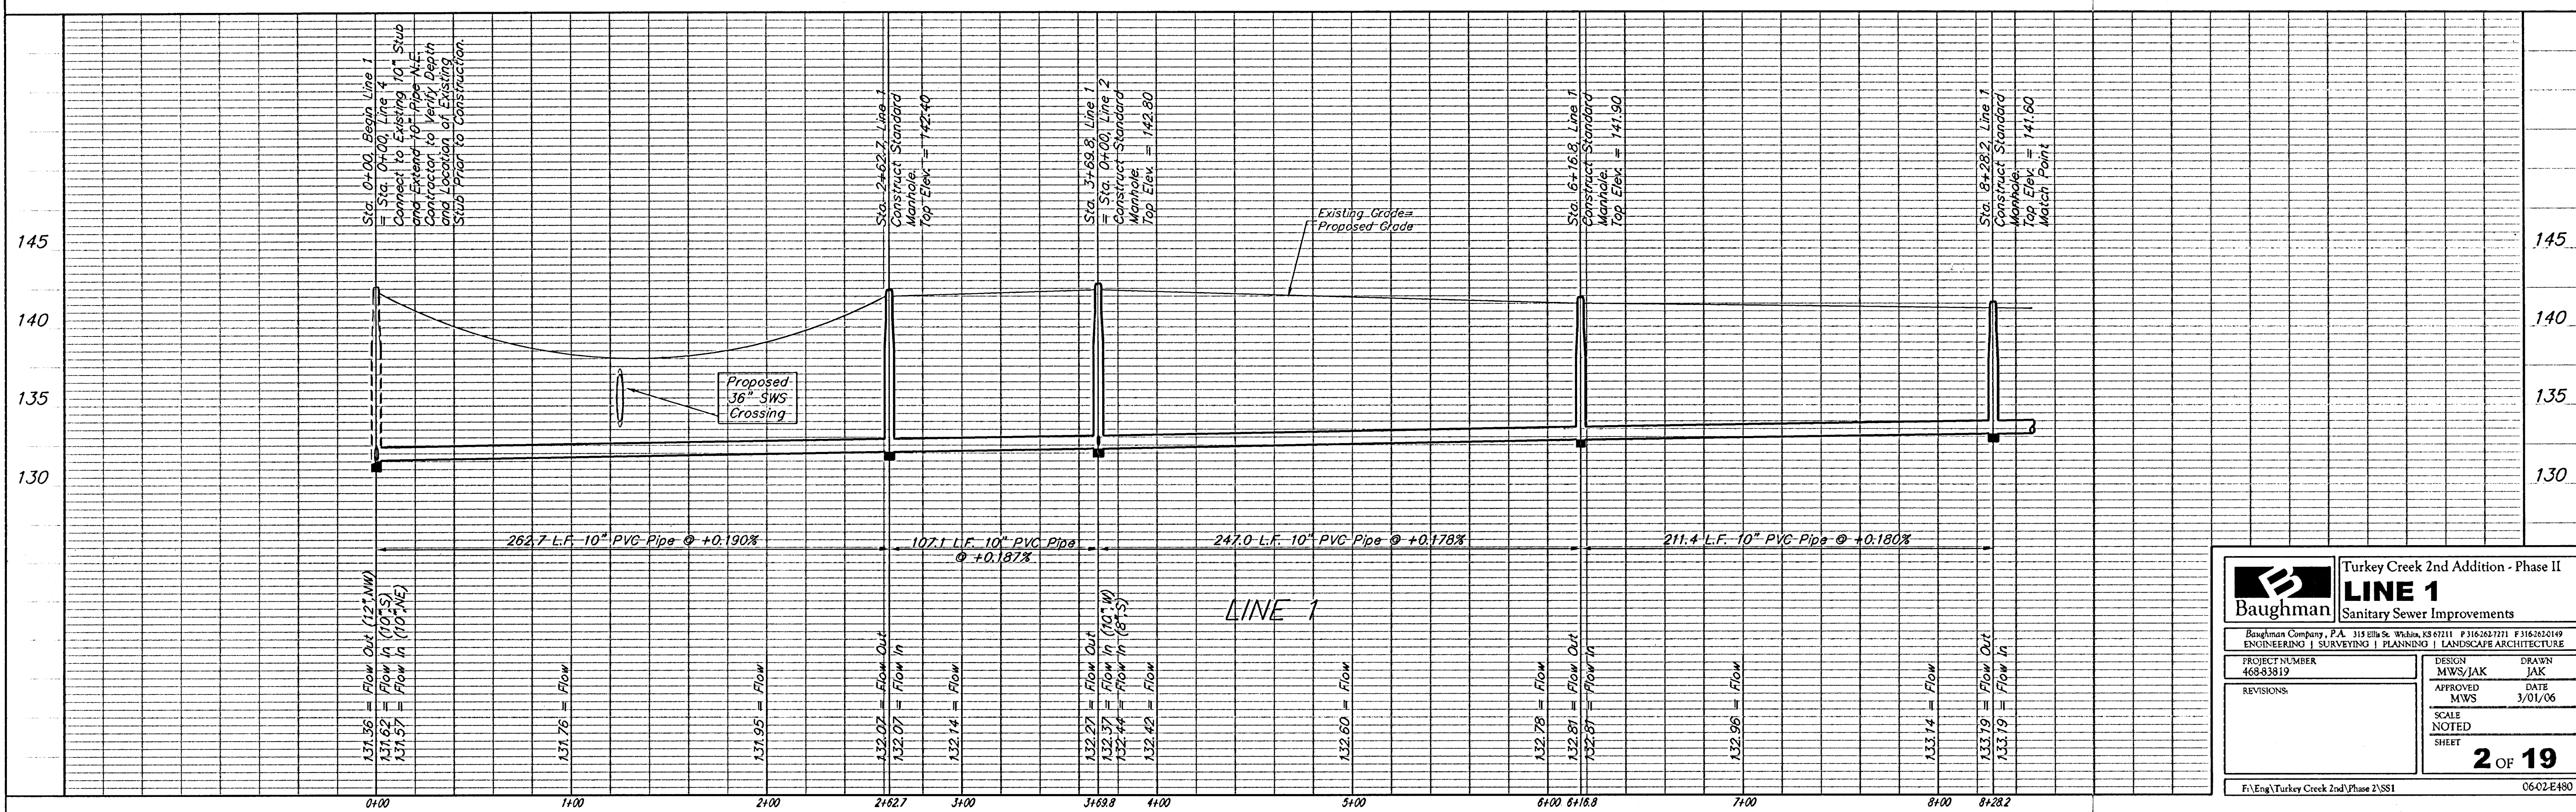

Baughman		Turkey Creek 2nd Addition - Phase II	
LINE 1		Sanitary Sewer Improvements	
Baughman Company, P.A. 315 Ellis St. Wichita, KS 67211 P 316/262-7771 F 316/262-0149			
ENGINEERING SURVEYING PLANNING LANDSCAPE ARCHITECTURE			
PROJECT NUMBER 468-83819	DESIGN MWS/JAK	DRAWN JAK	
REVISIONS:	APPROVED MWS	DATE 3/01/06	
SCALE NOTED SHEET		2 OF 19	
F:\Eng\Turkey Creek 2nd\Phase 2\SS1		0602E480	