



BENCHMARK:
 Chiseled "□" on top of RCP
 End Section, 131' south and
 38' west of SE Property Corner
 Elev = 1358.62

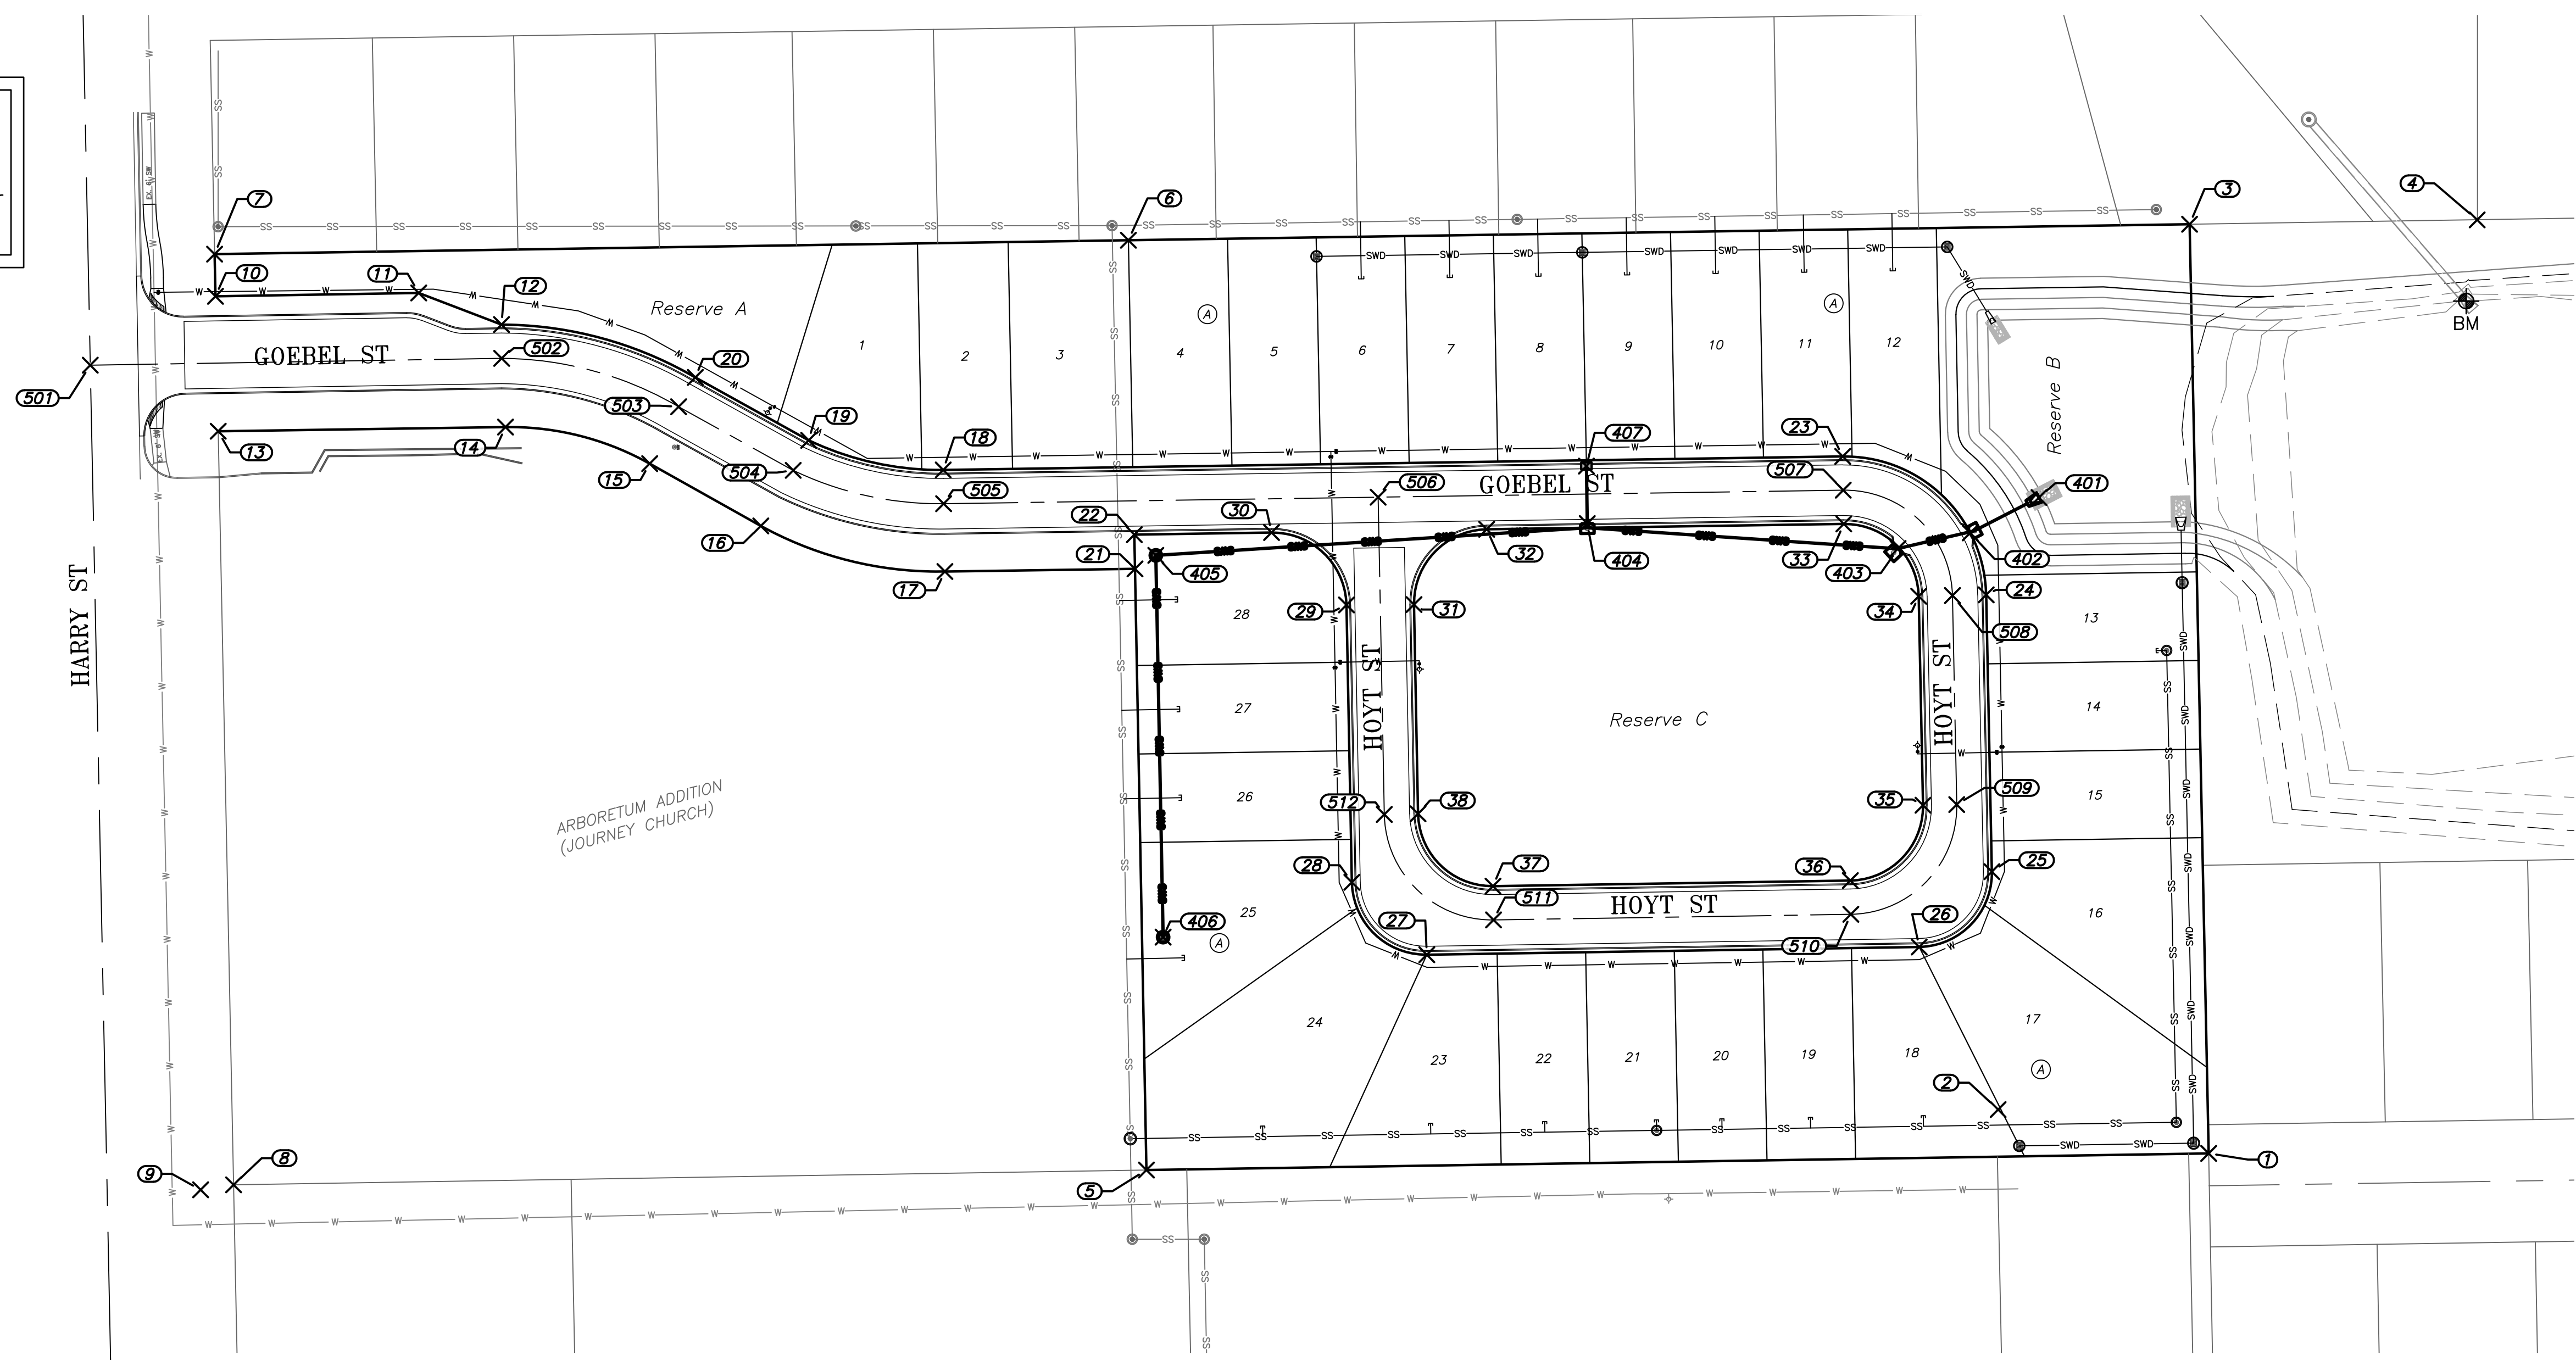

Control Points							
Point #	Raw Description	Northing	Easting	Point #	Raw Description	Northing	Easting
1	1in I.P. Baughman	1677259.08	1681943.02	20	Control	1677976.44	1682310.95
2	R4 R&B	1677358.88	1681963.82	21	Control	1677768.03	1682220.18
3	MagNail in Tree	1677268.13	1682383.58	22	Control	1677768.34	1682236.42
4	0.75in I.P.	1677131.80	1682385.64	23	Control	1677432.53	1682273.48
5	0.50in I.P.	1677762.60	1681935.15	24	Control	1677364.54	1682207.86
6	0.50in I.P.	1677771.15	1682376.01	25	Control	1677361.84	1682076.61
7	0.75in I.P.	1678204.32	1682369.39	26	Control	1677396.29	1682040.89
8	1in I.P. Baughman	1678195.31	1681928.13	27	Control	1677629.69	1682037.24
9	R4 R&B	1678210.94	1681925.76	28	Control	1677665.23	1682071.56
10	Control	1678203.91	1682349.40	29	Control	1677667.78	1682203.08
11	Control	1678107.56	1682351.00	30	Control	1677703.30	1682237.40
12	Control	1678068.30	1682335.99	31	Control	1677635.78	1682203.26
13	Control	1678202.60	1682285.42	32	Control	1677601.31	1682238.94
14	Control	1678066.42	1682287.41	33	Control	1677432.05	1682241.48
15	Control	1677998.08	1682270.09	34	Control	1677396.53	1682207.21
16	Control	1677945.40	1682240.54	35	Control	1677394.50	1682108.10
17	Control	1677858.12	1682218.93	36	Control	1677428.94	1682072.38
18	Control	1677858.92	1682267.06	37	Control	1677598.31	1682069.74
19	Control	1677922.71	1682281.11	38	Control	1677683.85	1682104.05

SWS & Paving Points			
Point #	Raw Description	Northing	Easting
401	0+00.00 SWS A	1677339.50	1682253.99
402	0+36.62 SWS A	1677372.11	1682237.22
403	0+73.90 SWS A	1677406.31	1682229.81
404	2+21.19 SWS A	1677553.64	1682241.65
405	4+26.15 SWS A	1677758.15	1682226.57
406	6+07.20 SWS A	1677754.70	1682045.55
407	0+29.25 SWS B	1677554.05	1682268.90
501	CL 00+00.00	1678263.26	1682316.74
502	CL 01+95.06	1678068.22	1682319.99
503	CL 02+83.01	1677984.36	1682297.05
504	CL 03+45.13	1677930.05	1682266.88
505	CL 04+18.83	1677858.72	1682251.06
506	CL 06+24.81	1677652.77	1682254.16
507	CL 08+45.31	1677432.29	1682257.48
508	CL 09+25.14	1677380.54	1682207.53
509	CL 10+24.27	1677378.50	1682108.43
510	CL 11+04.93	1677428.69	1682056.39
511	CL 12+74.02	1677598.06	1682053.74
512	CL 13+53.94	1677649.85	1682103.74

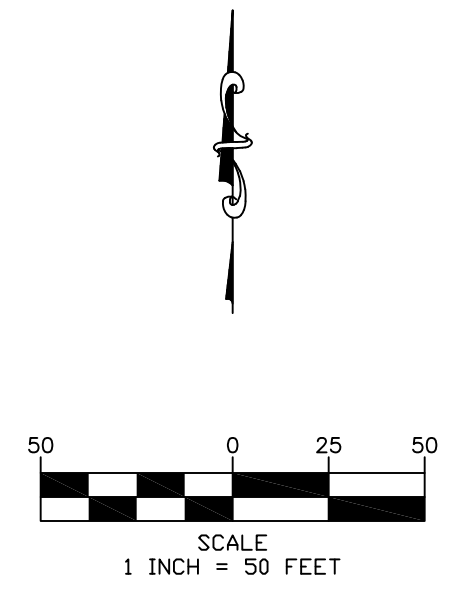

Buena Vista Addition
Control Map
 Wichita, Kansas

KEMILLER
 ENGINEERING
 117 E. Lewis, Wichita, KS 67202 (316)264-0242

KEM PROJ. 18085	DATE 05.2023	SHEET 2.0
DESIGN KEM	DRAWN ZJS	

MAY 4, 2023