


GENERAL NOTES:

1. All pavement markings shall conform to the current standards set forth in the latest publication of the "Manual on Uniform Traffic Control Devices" 2009 Edition.
2. All pavement markings shall be thermoplastic. Pavement markings shall be installed per manufacturer's recommendations and shall meet KDOT's 2007 Standard Specification. Full traffic may not be restored (and substantial completion achieved) until all pavement markings are in place. Should construction timing be such that restoration of traffic becomes necessary during temperatures in which prohibit the installation of thermoplastic markings, the contractor shall install and maintain temporary markings until such time that thermoplastic markings may be properly installed. Except for the material requirement, temporary pavement markings shall be placed equivalent to the permanent marking layout.

MARKING BILL OF MATERIALS:
(For Information Only)

	ITEM	UNIT	QUANTITY
①	4" White Solid Line	106	L.F.
②	4" Yellow Solid Line	106	L.F.
③	12" White Solid Line	36	L.F.
④	Lt Turn Arrow Symbol	2	ea
⑤	Rt Turn Arrow Symbol	2	ea
⑥	Through Arrow Symbol	1	ea

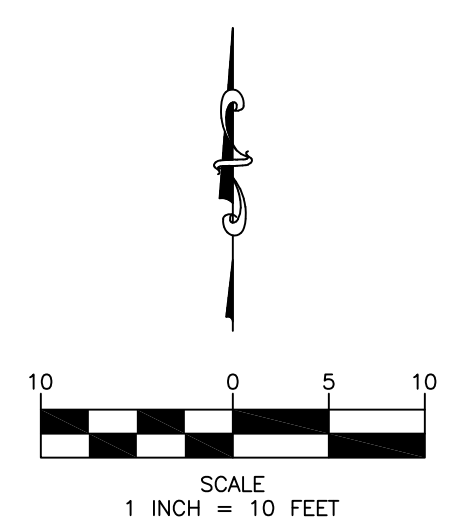

Buena Vista Addition
Striping Plan
Wichita, Kansas



117 E. Lewis, Wichita, KS 67202 (316)264-0242

KEM PROJ. 18085	DATE 05.2023	SHEET 5.0
DESIGN KEM	DRAWN ZJS	