
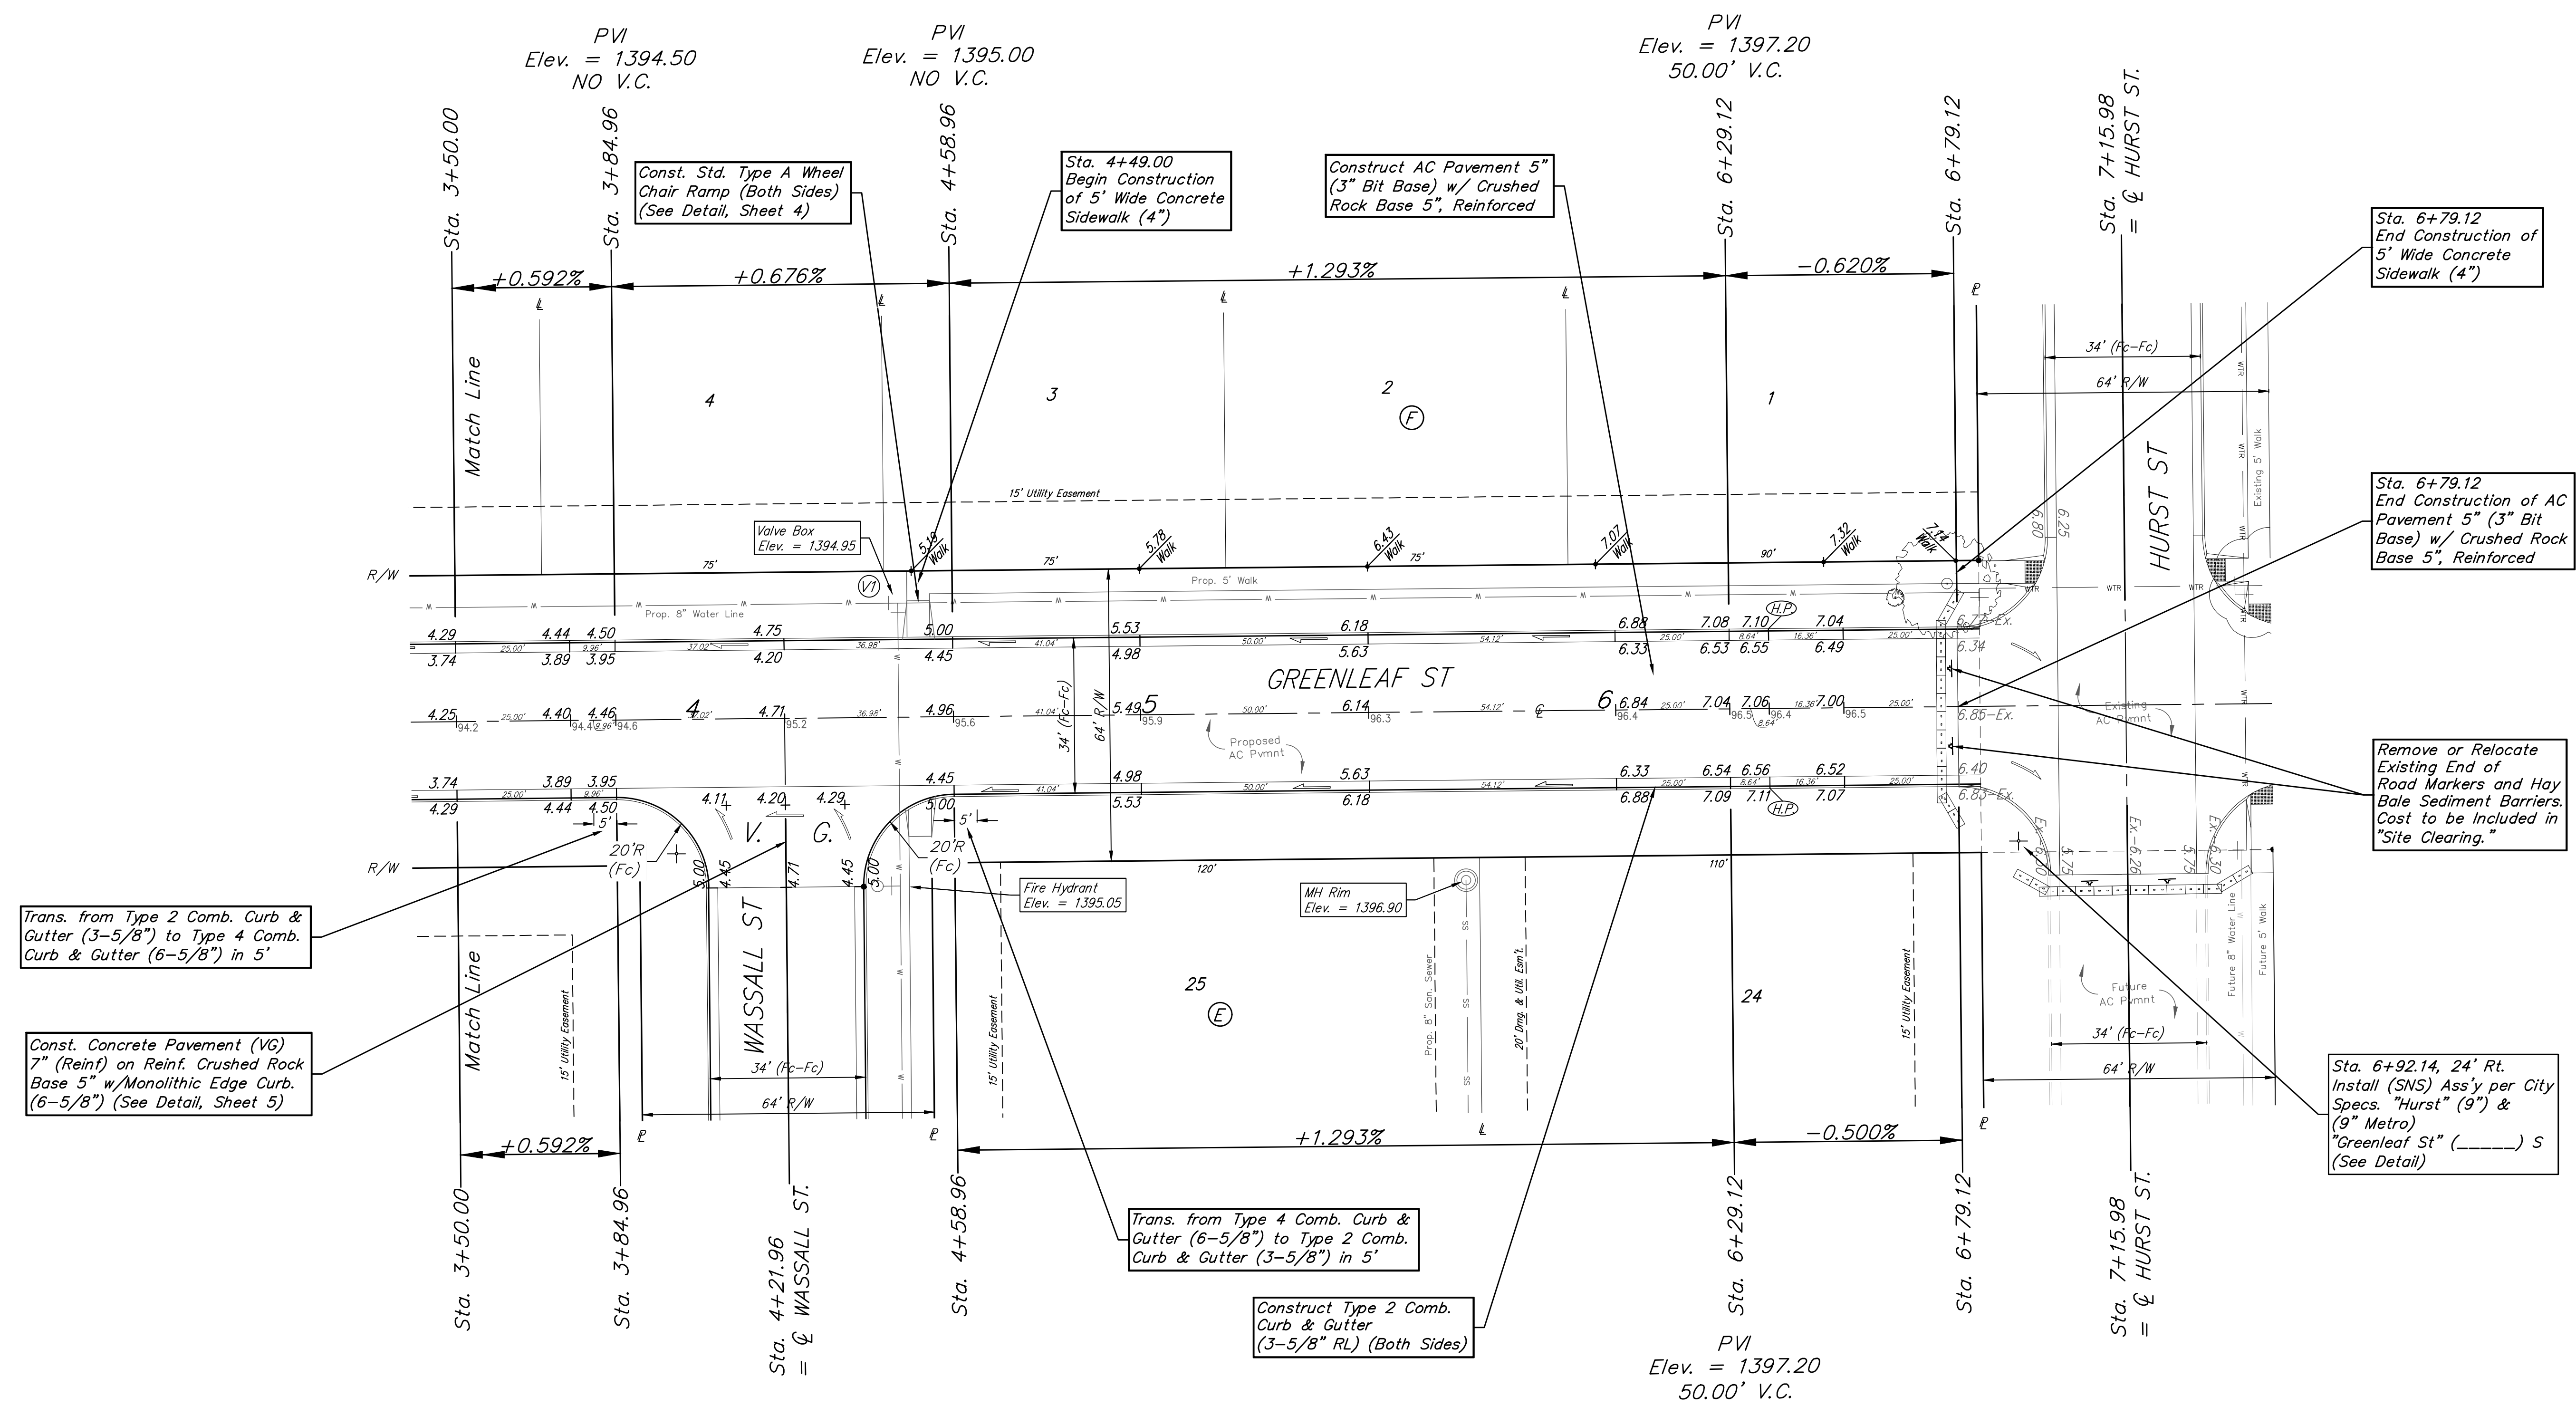


BENCHMARKS:
 BM-1#
 SQUARE CUT ON TOP OF CURB 118.3'± N.
 & 6.4'± W. OF SE. COR. LOT 7, BLOCK 2,
 TURTLE RUN 3RD ADDITION.
 ELEV. = 1390.32 NAVD88

BM-2#
 SQUARE CUT ON TOP OF CURB 118.4'± N.
 OF SE. COR. LOT 6, BLOCK 2, TURTLE
 RUN 2ND ADDITION.
 ELEV. = 1391.04 NAVD88

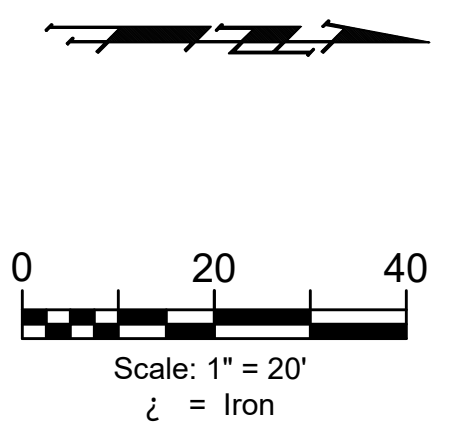

Trans. from Type 2 Comb. Curb & Gutter (3-5/8") to Type 4 Comb. Curb & Gutter (6-5/8") in 5'

Const. Concrete Pavement (VG) 7" (Reinf) on Reinf. Crushed Rock Base 5" w/ Monolithic Edge Curb. (6-5/8") (See Detail, Sheet 5)

Const. Std. Type A Wheel Chair Ramp (Both Sides) (See Detail, Sheet 4)

Sta. 4+49.00 Begin Construction of 5' Wide Concrete Sidewalk (4")

Construct AC Pavement 5" (3" Bit Base) w/ Crushed Rock Base 5", Reinforced

Sta. 6+79.12 End Construction of 5' Wide Concrete Sidewalk (4")

Sta. 6+79.12 End Construction of AC Pavement 5" (3" Bit Base) w/ Crushed Rock Base 5", Reinforced

Remove or Relocate Existing End of Road Markers and Hay Bale Sediment Barriers. Cost to be Included in "Site Clearing."

Sta. 6+92.14, 24' Rt. Install (SNS) Ass'y per City Specs. "Hurst" (9") & "Greenleaf St" (_____) S (See Detail)

Trans. from Type 4 Comb. Curb & Gutter (6-5/8") to Type 2 Comb. Curb & Gutter (3-5/8") in 5'

Construct Type 2 Comb. Curb & Gutter (3-5/8" RL) (Both Sides)

Roll type curb & gutter to be constructed on the pavement on this sheet. Top of curb elevation are given for full height curb.



BAUGHMAN COMPANY
 315 Ellis St.
 Wichita, KS 67211
 316-262-7271
 BaughmanCo.com

TOWNE PARC 10TH ADDITION PHASE 1
GREENLEAF ST

Sta. 3+50.00 to Sta. 6+79.12
 Street Paving Improvements
 PROJECT NUMBER:
 DESIGN: NBW DRAWN: JLD
 DATE: 28 September 2023
 SHEET **09** OF **43**

File: E:\Projects\Towne Parc 10th Addition_22-01-P743\Engineering\PHASE 1\STR-22-11-E355\STR.dwg