
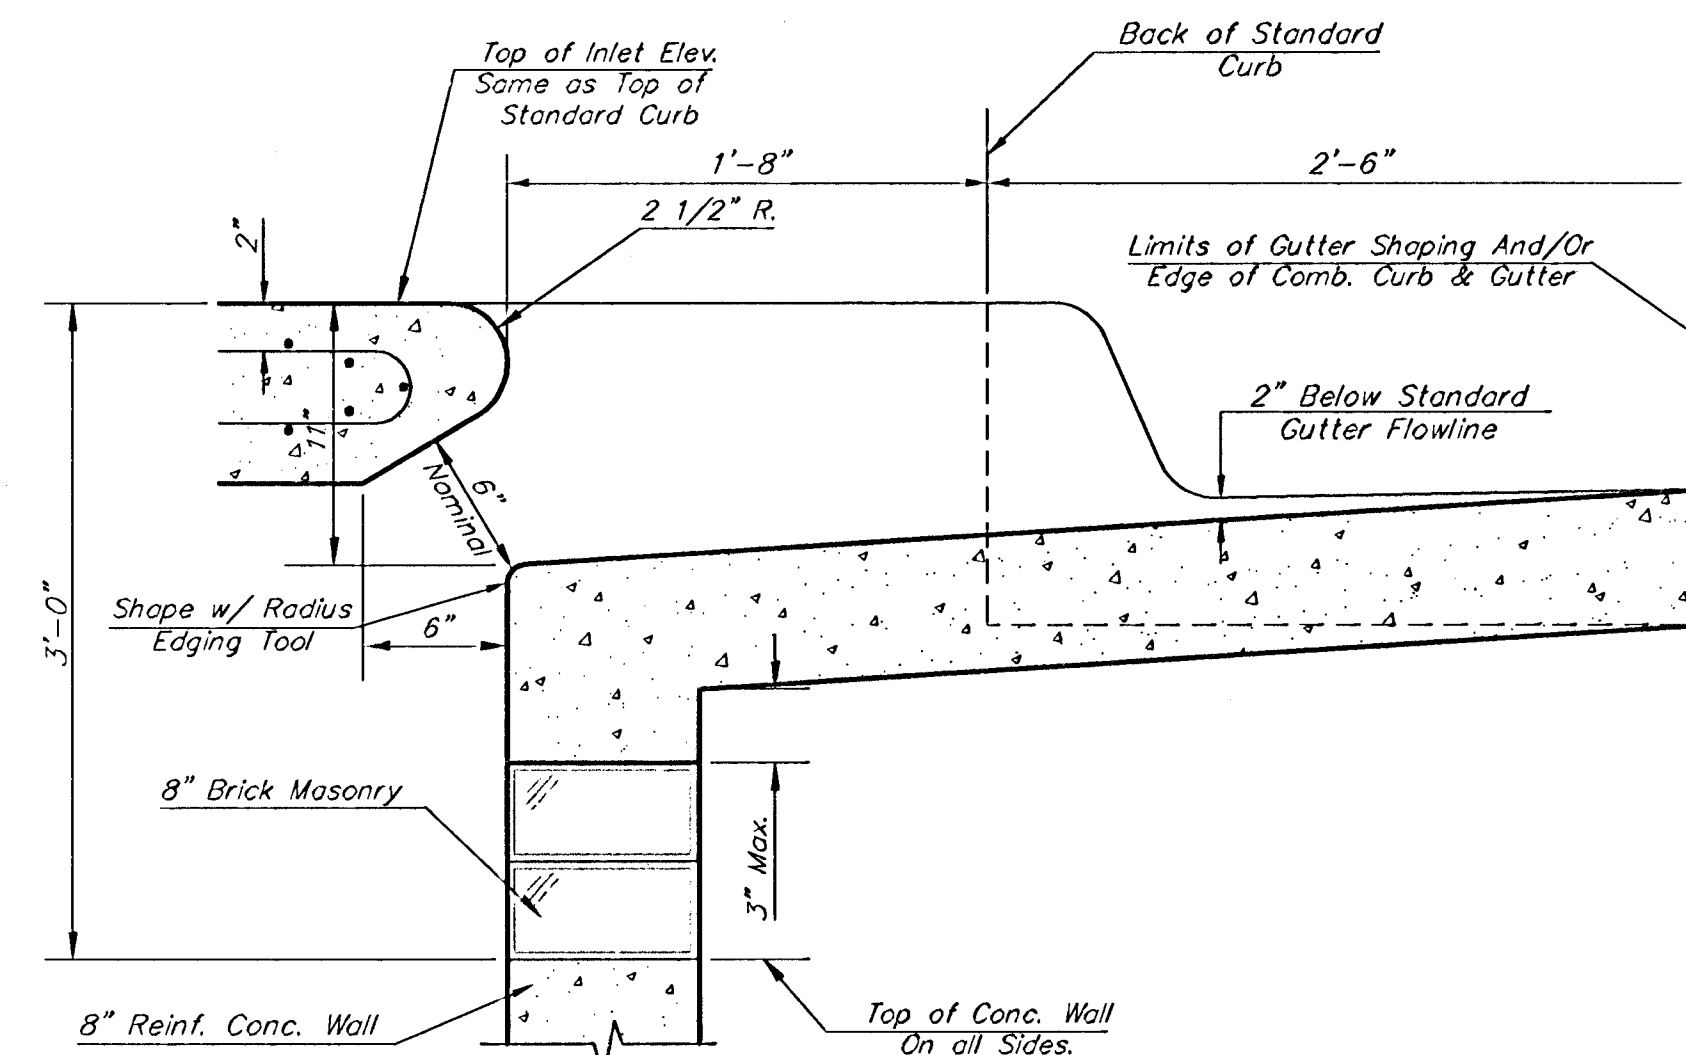
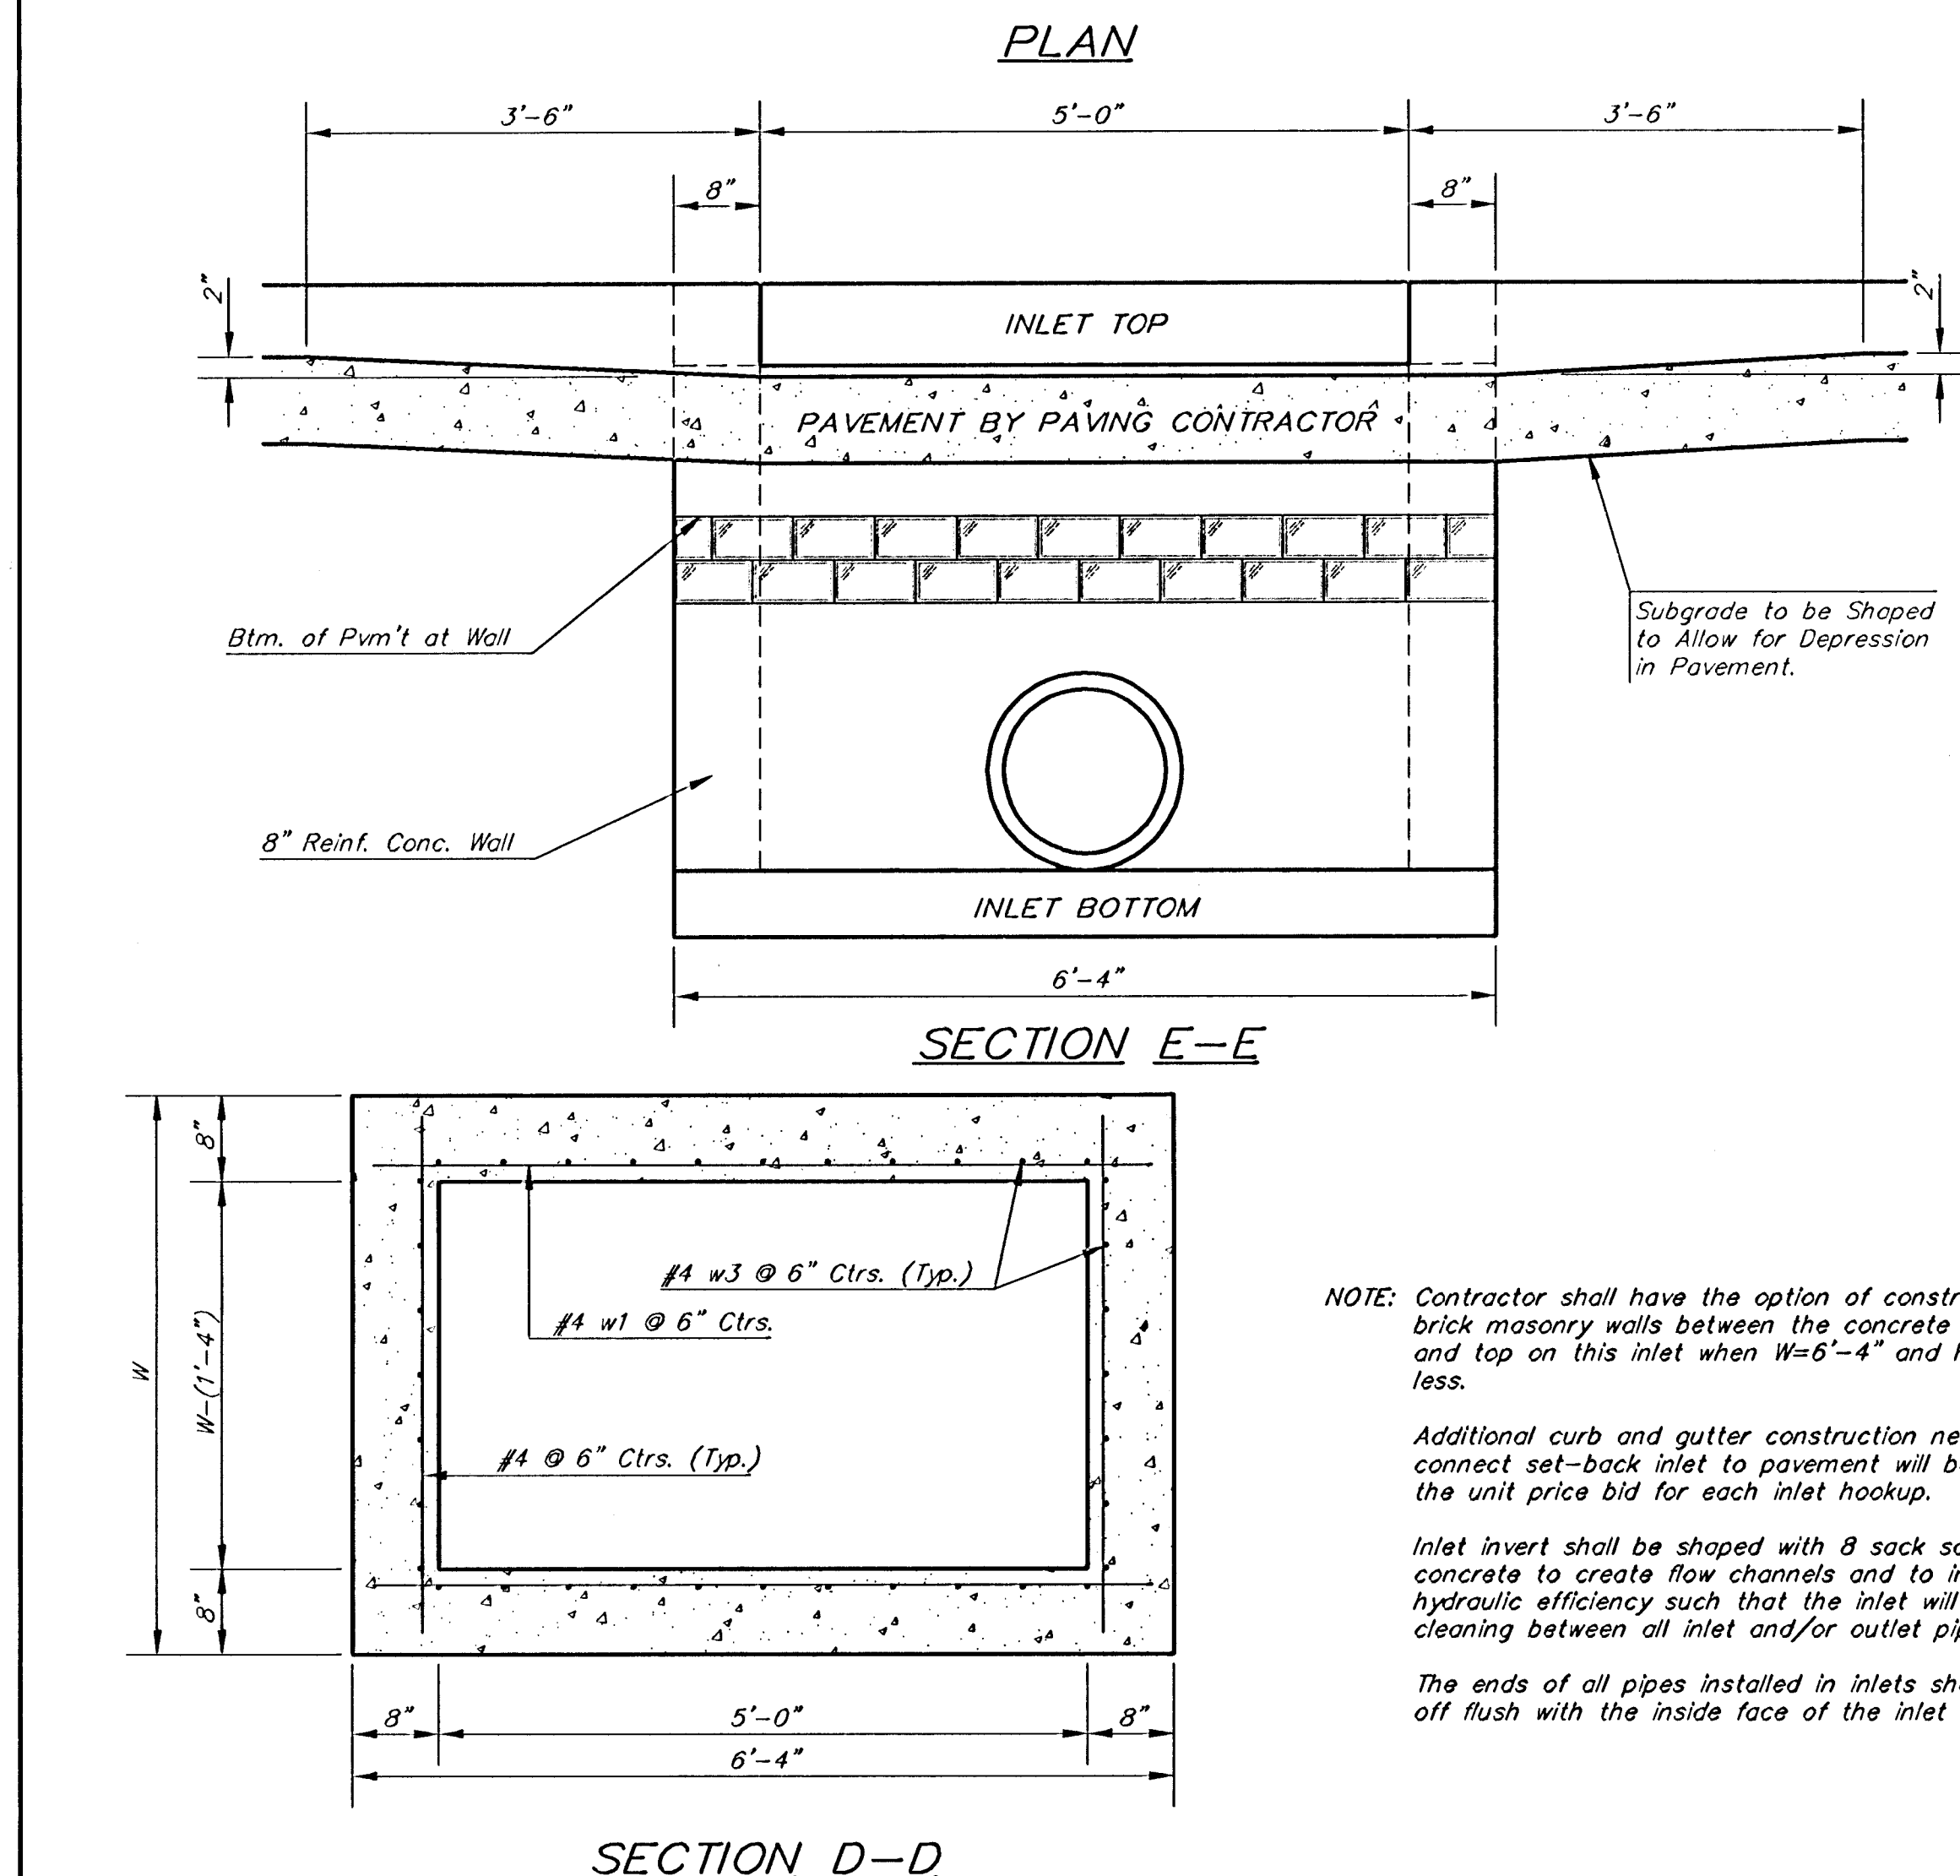
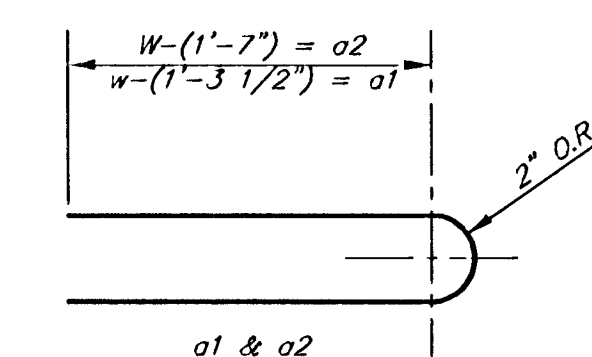
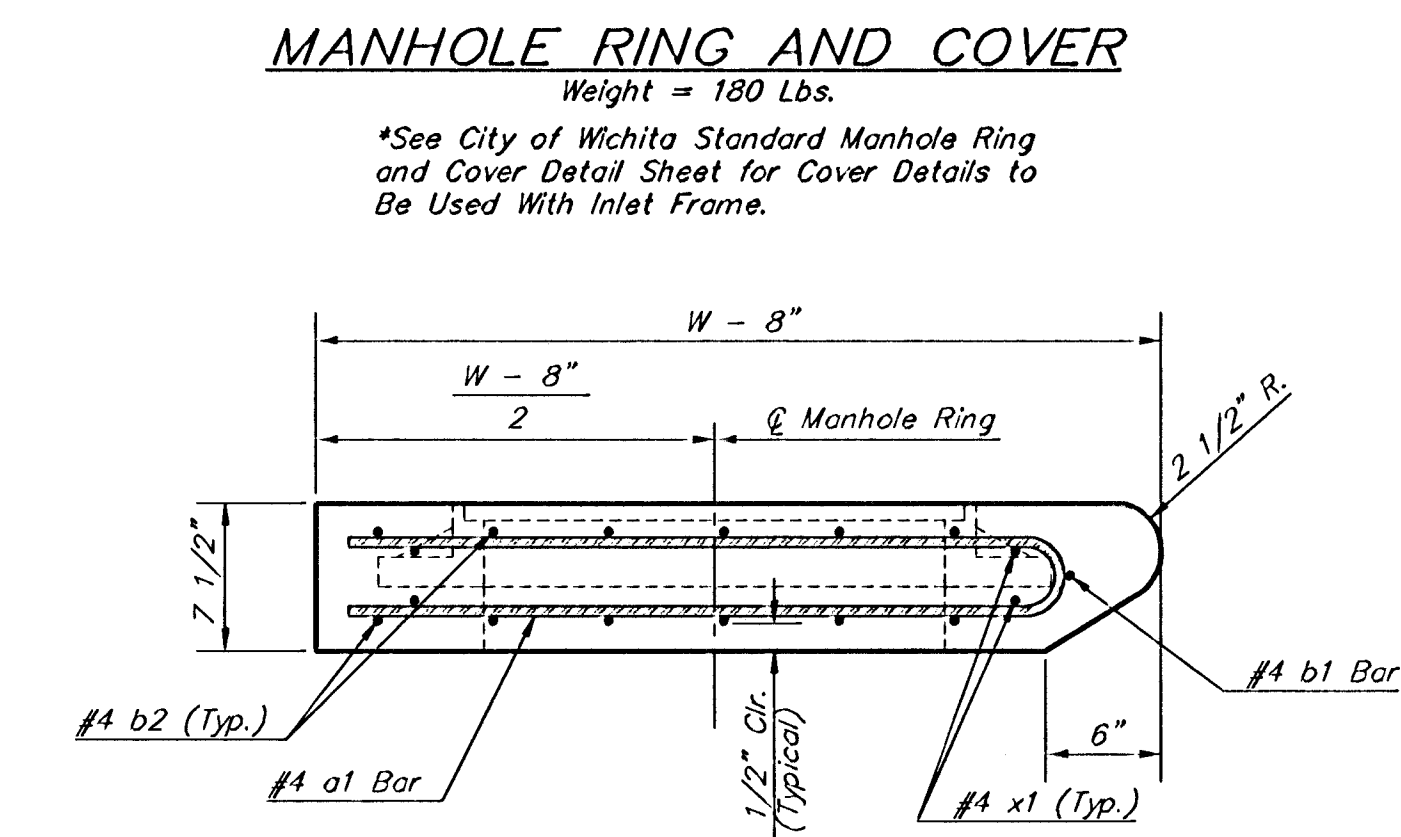


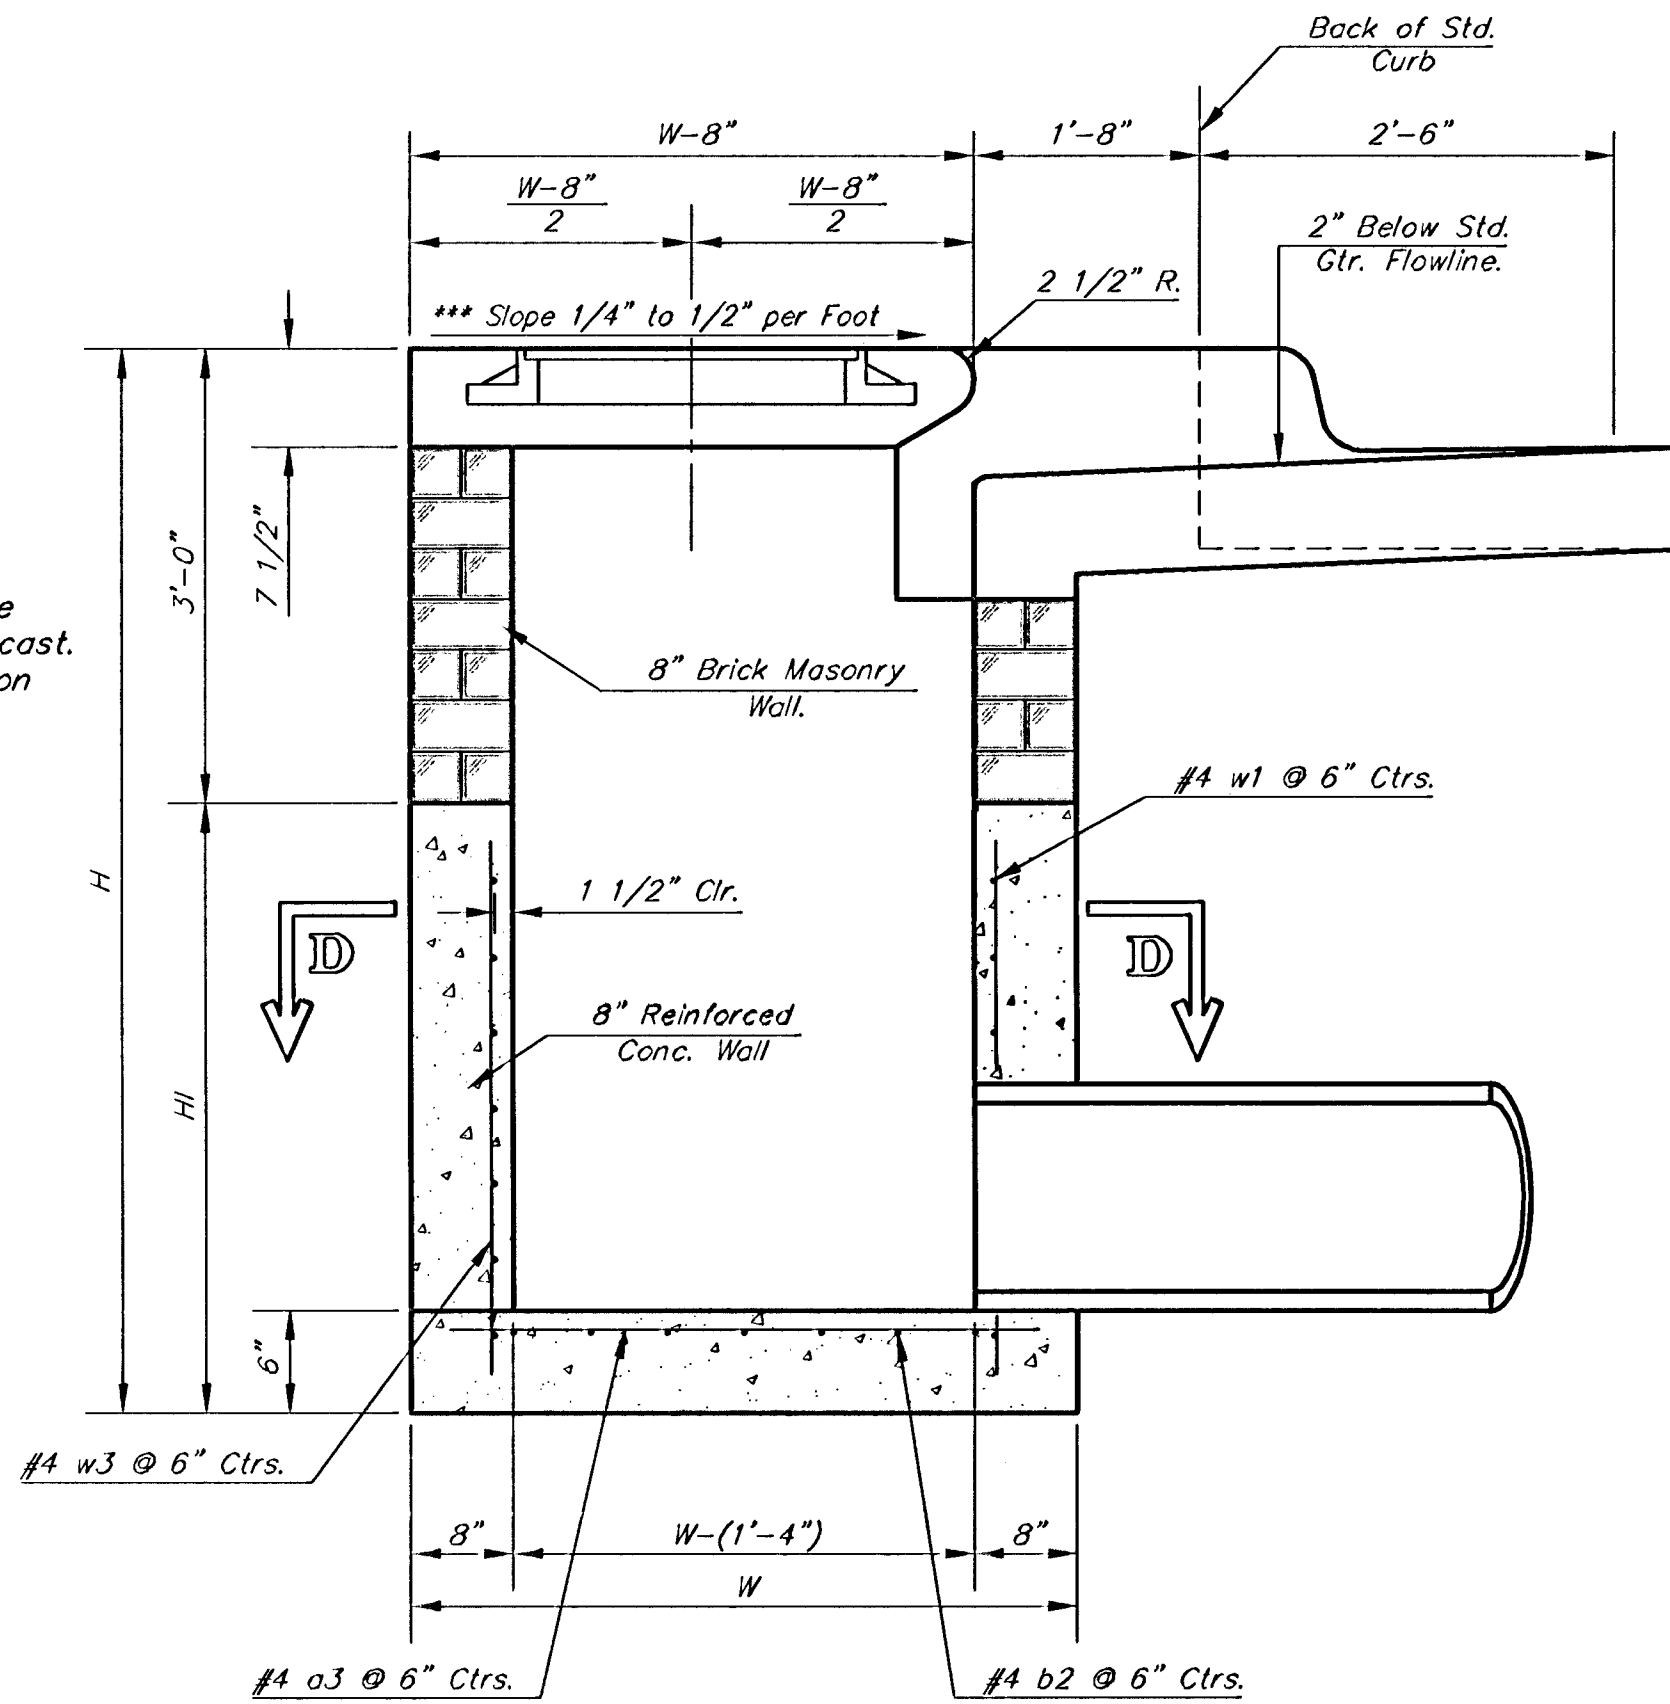

PRECAST SLAB AND FLOOR REINFORCING

t

MARK	SIZE	W = 4'-4"		W = 5'-4"		W = 6'-4"		W = 7'-4"		W = 8'-4"	
		NO.	LENGTH	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH
* a1	#4	6	6'-2"	6	8'-7"	6	10'-2"	6	12'-7"	6	14'-2"
o2	#4	4	6'-0"	4	8'-0"	4	10'-0"	4	12'-0"	4	14'-0"
o3	#4	13	4'-1"	13	5'-1"	13	6'-1"	13	7'-1	13	8'-1"
b1	#4	1	4'-9"	1	4'-9"	1	4'-9"	1	4'-9"	1	4'-9"
* b2	#4	23	6'-1"	29	6'-1"	35	6'-1"	41	6'-1"	47	6'-1"
x1	#4	8	3'-10"	8	4'-2"	8	4'-6"	8	4'-10"	8	5'-2"

WALL REINFORCING

MARK	SIZE	W = 4'-4"		W = 5'-4"		W = 6'-4"		W = 7'-4"		W = 8'-4"	
		NO.	LENGTH	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH	NO.	LENGTH
w1	#4	①	6'-1"	①	6'-1"	②	6'-1"	①	6'-1"	②	6'-1"
w2	#4	①	4'-1"	①	5'-1"	②	6'-1"	①	7'-1"	②	8'-1"
w3	#4	②	②	③	②	④	②	④	②	④	②

* Field Bend or Cut Reinforcing as Required for Clearance.

① 4 (Hl - 12") (Hl - 21") Rounded down to nearest 0.5'

② Hl - 3"

STANDARD CURB INLET PRECAST TOPS			
W	PRE-CAST TOP SIZE	PIPE SIZE	CU. YD. CONC.
4'-4"	3'-8" x 6'-4" x 1 1/2"	21" & SMALLER	0.38±
5'-4"	4'-8" x 6'-4" x 1 1/2"	24" & 30"	0.51±
6'-4"	5'-8" x 6'-4" x 1 1/2"	36" & 42"	0.64±
7'-4"	6'-8" x 6'-4" x 1 1/2"	48" & 54"	0.77±
8'-4"	7'-8" x 6'-4" x 1 1/2"	60" & 66"	0.90±