



Note:
There is minimal clearance between the aggregate base and top of existing storm sewer pipe to remain. Use caution whenever construction activity takes place in those areas.

The Contractor shall coordinate with the utility companies to locate any existing utilities that have not been previously located.

Any storm sewer adjacent to the curb & gutter or under any proposed pavement on mainline, side roads or entrances shall be backfilled in accordance with the City of Wichita Specifications unless otherwise noted on the plans or by the Engineer.

The space between the Type 2 Special inlets shall be filled with Flowable Fill. The Flowable Fill shall be considered SUBSIDIARY to the inlets.

All temporary pipe connections needed to drain the east side of West Street during construction shall be installed during Phase 2 of construction. All pipe, material, labor, and equipment needed to connect the pipe shall be considered SUBSIDIARY to the bid item "Temporary SWS Connection".

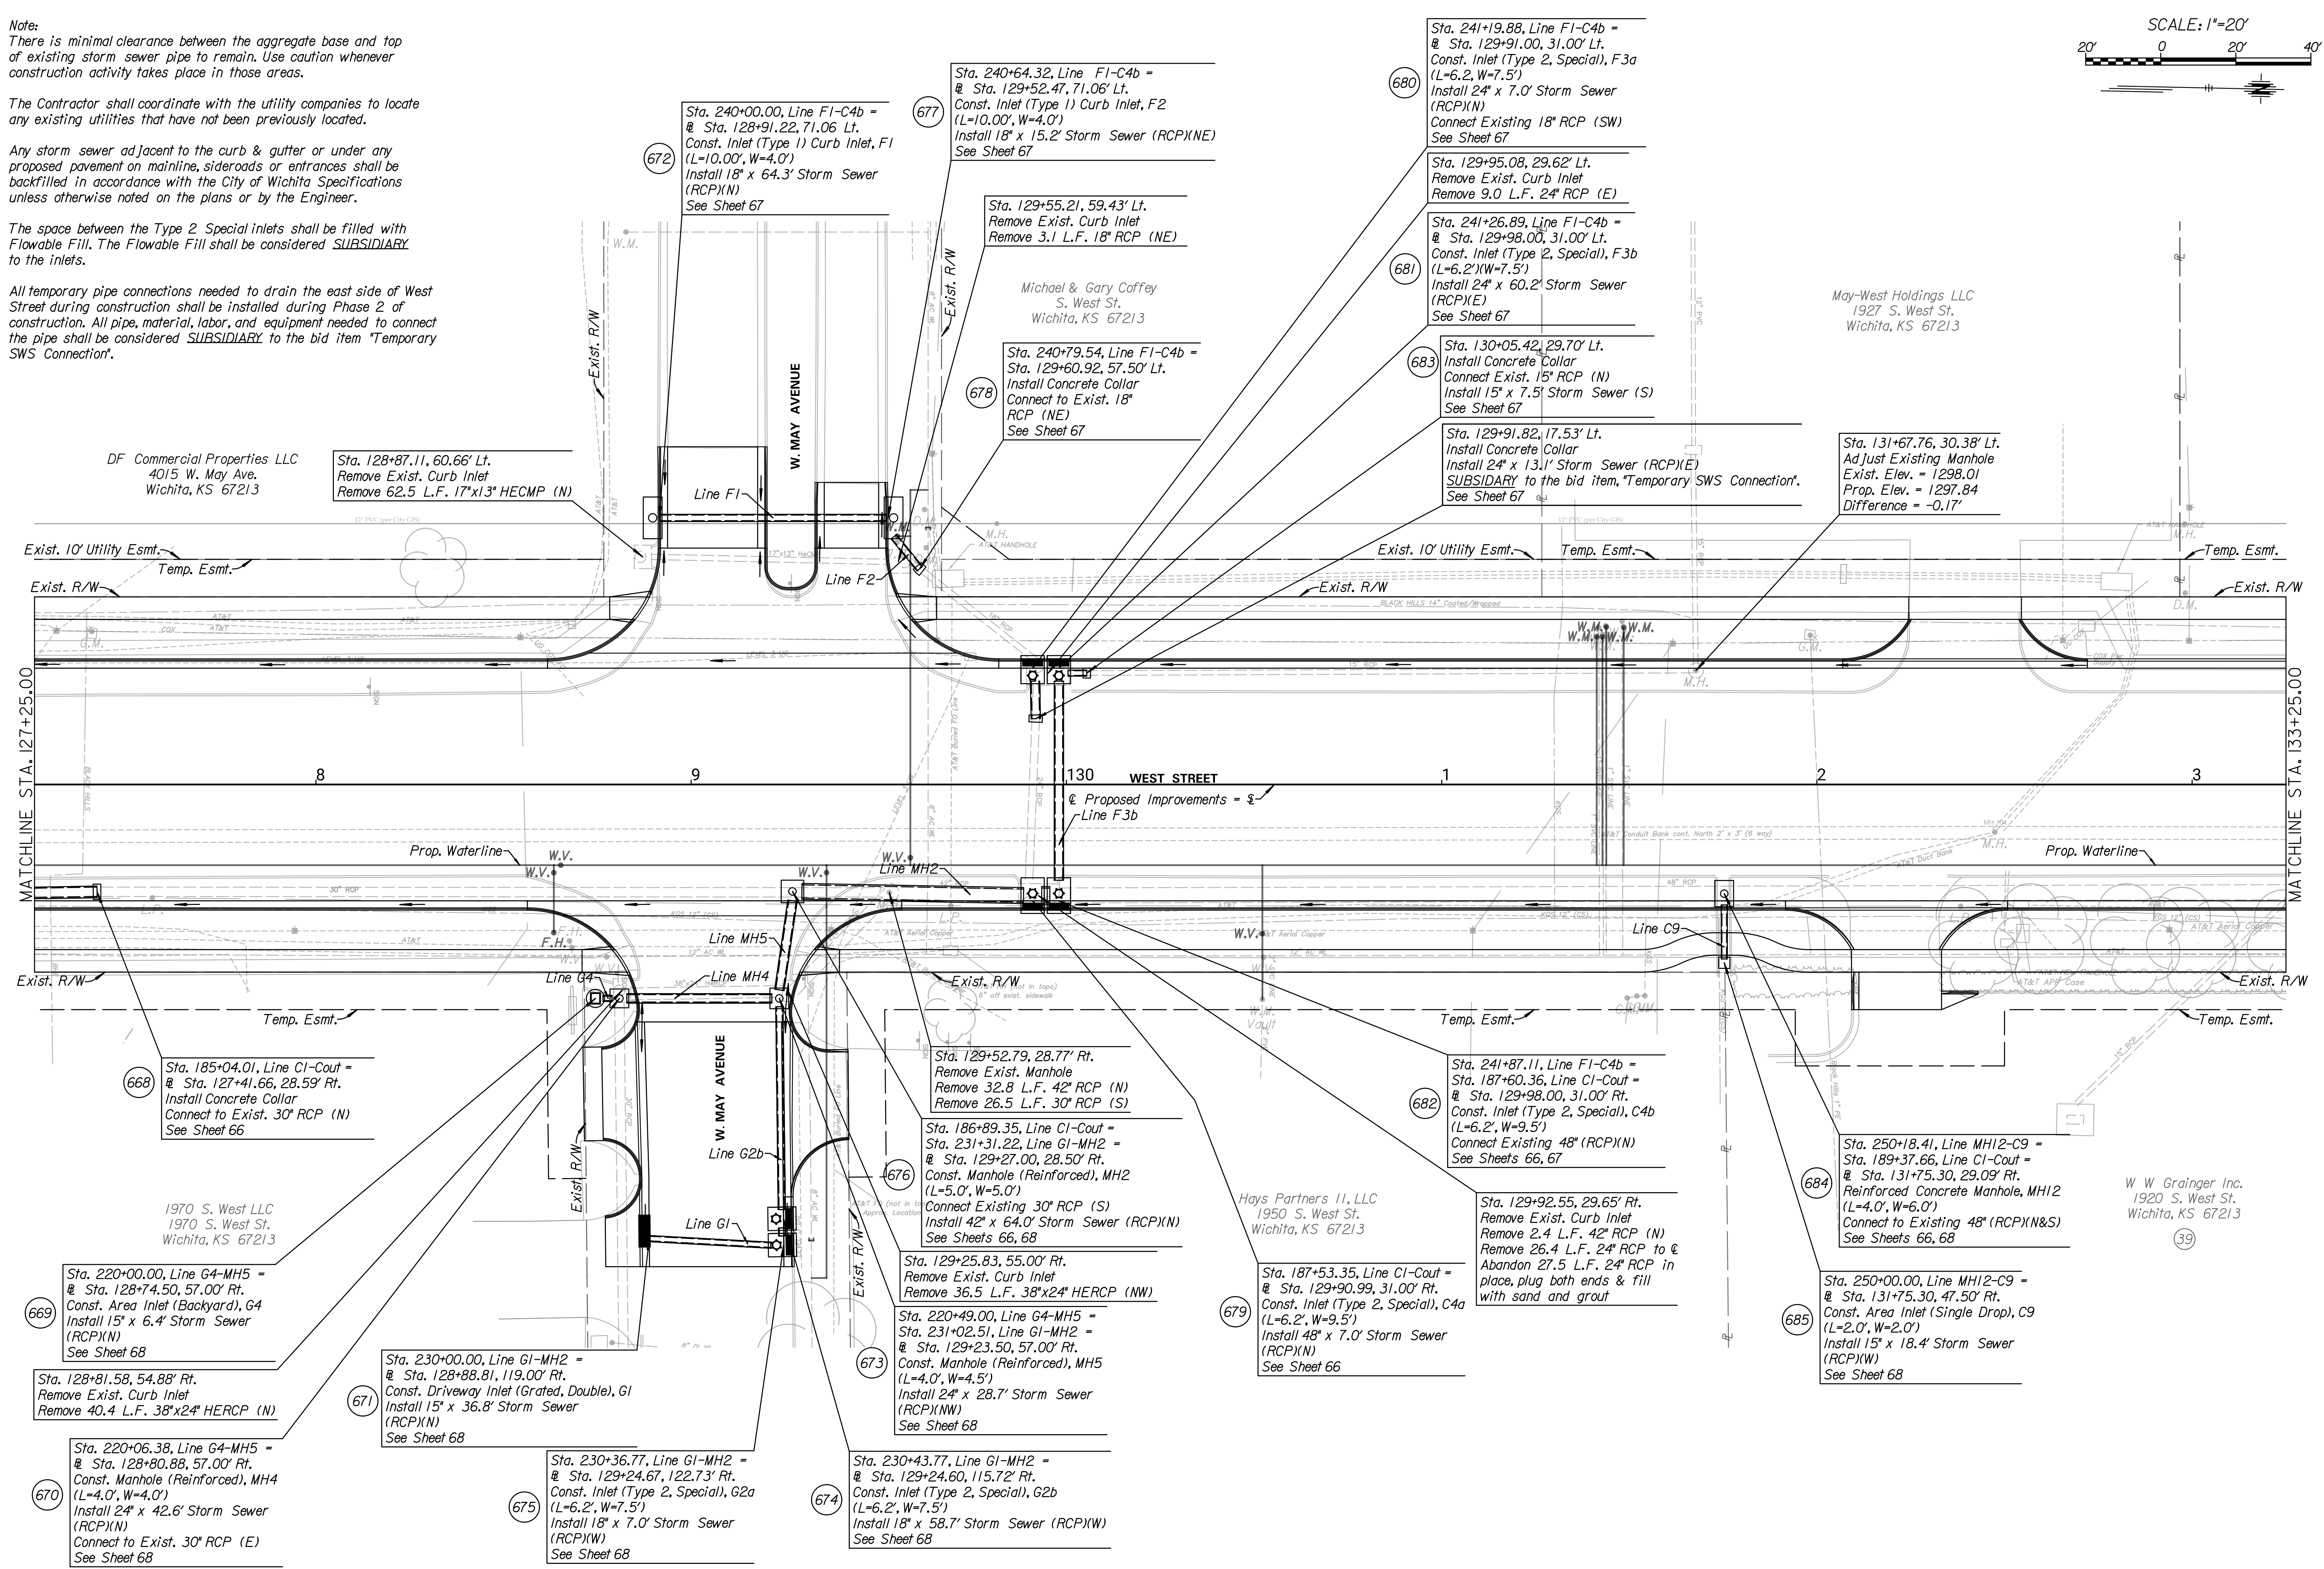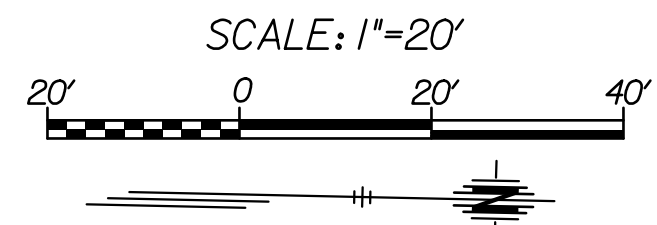

TRANSYSTEMS
245 N. WACO
SUITE 222
WICHITA, KANSAS 67202
MAIN: 316-303-3000
FAX: 316-462-5629

CONSULTANTS:
WICHITA, KANSAS
CITY OF WICHITA

WEST STREET IMPROVEMENTS FROM PAWNEE TO HARRY

REVISIONS:	MARK	DATE	DESCRIPTION

PROJ NO: 87 N-0720-01
SCALE: 1"=20'
DATE: 9/25/2023
DESIGNED BY: MLC
DRAWN BY: LCV
CHECKED BY: MDB

SHEET TITLE:
WEST STREET STORM SEWER IMPROVEMENTS

SHEET NO.
48

SHEET 48 OF 517

9/25/2023 8:22:04 PM - c:\transystems\proj\local\transystems\proj\1a-w_1\proj\8094549\C-SDR-W01-108L.DGN