


CONSULTANTS:

WEST STREET IMPROVEMENTS
 FROM PAWNEE TO HARRY

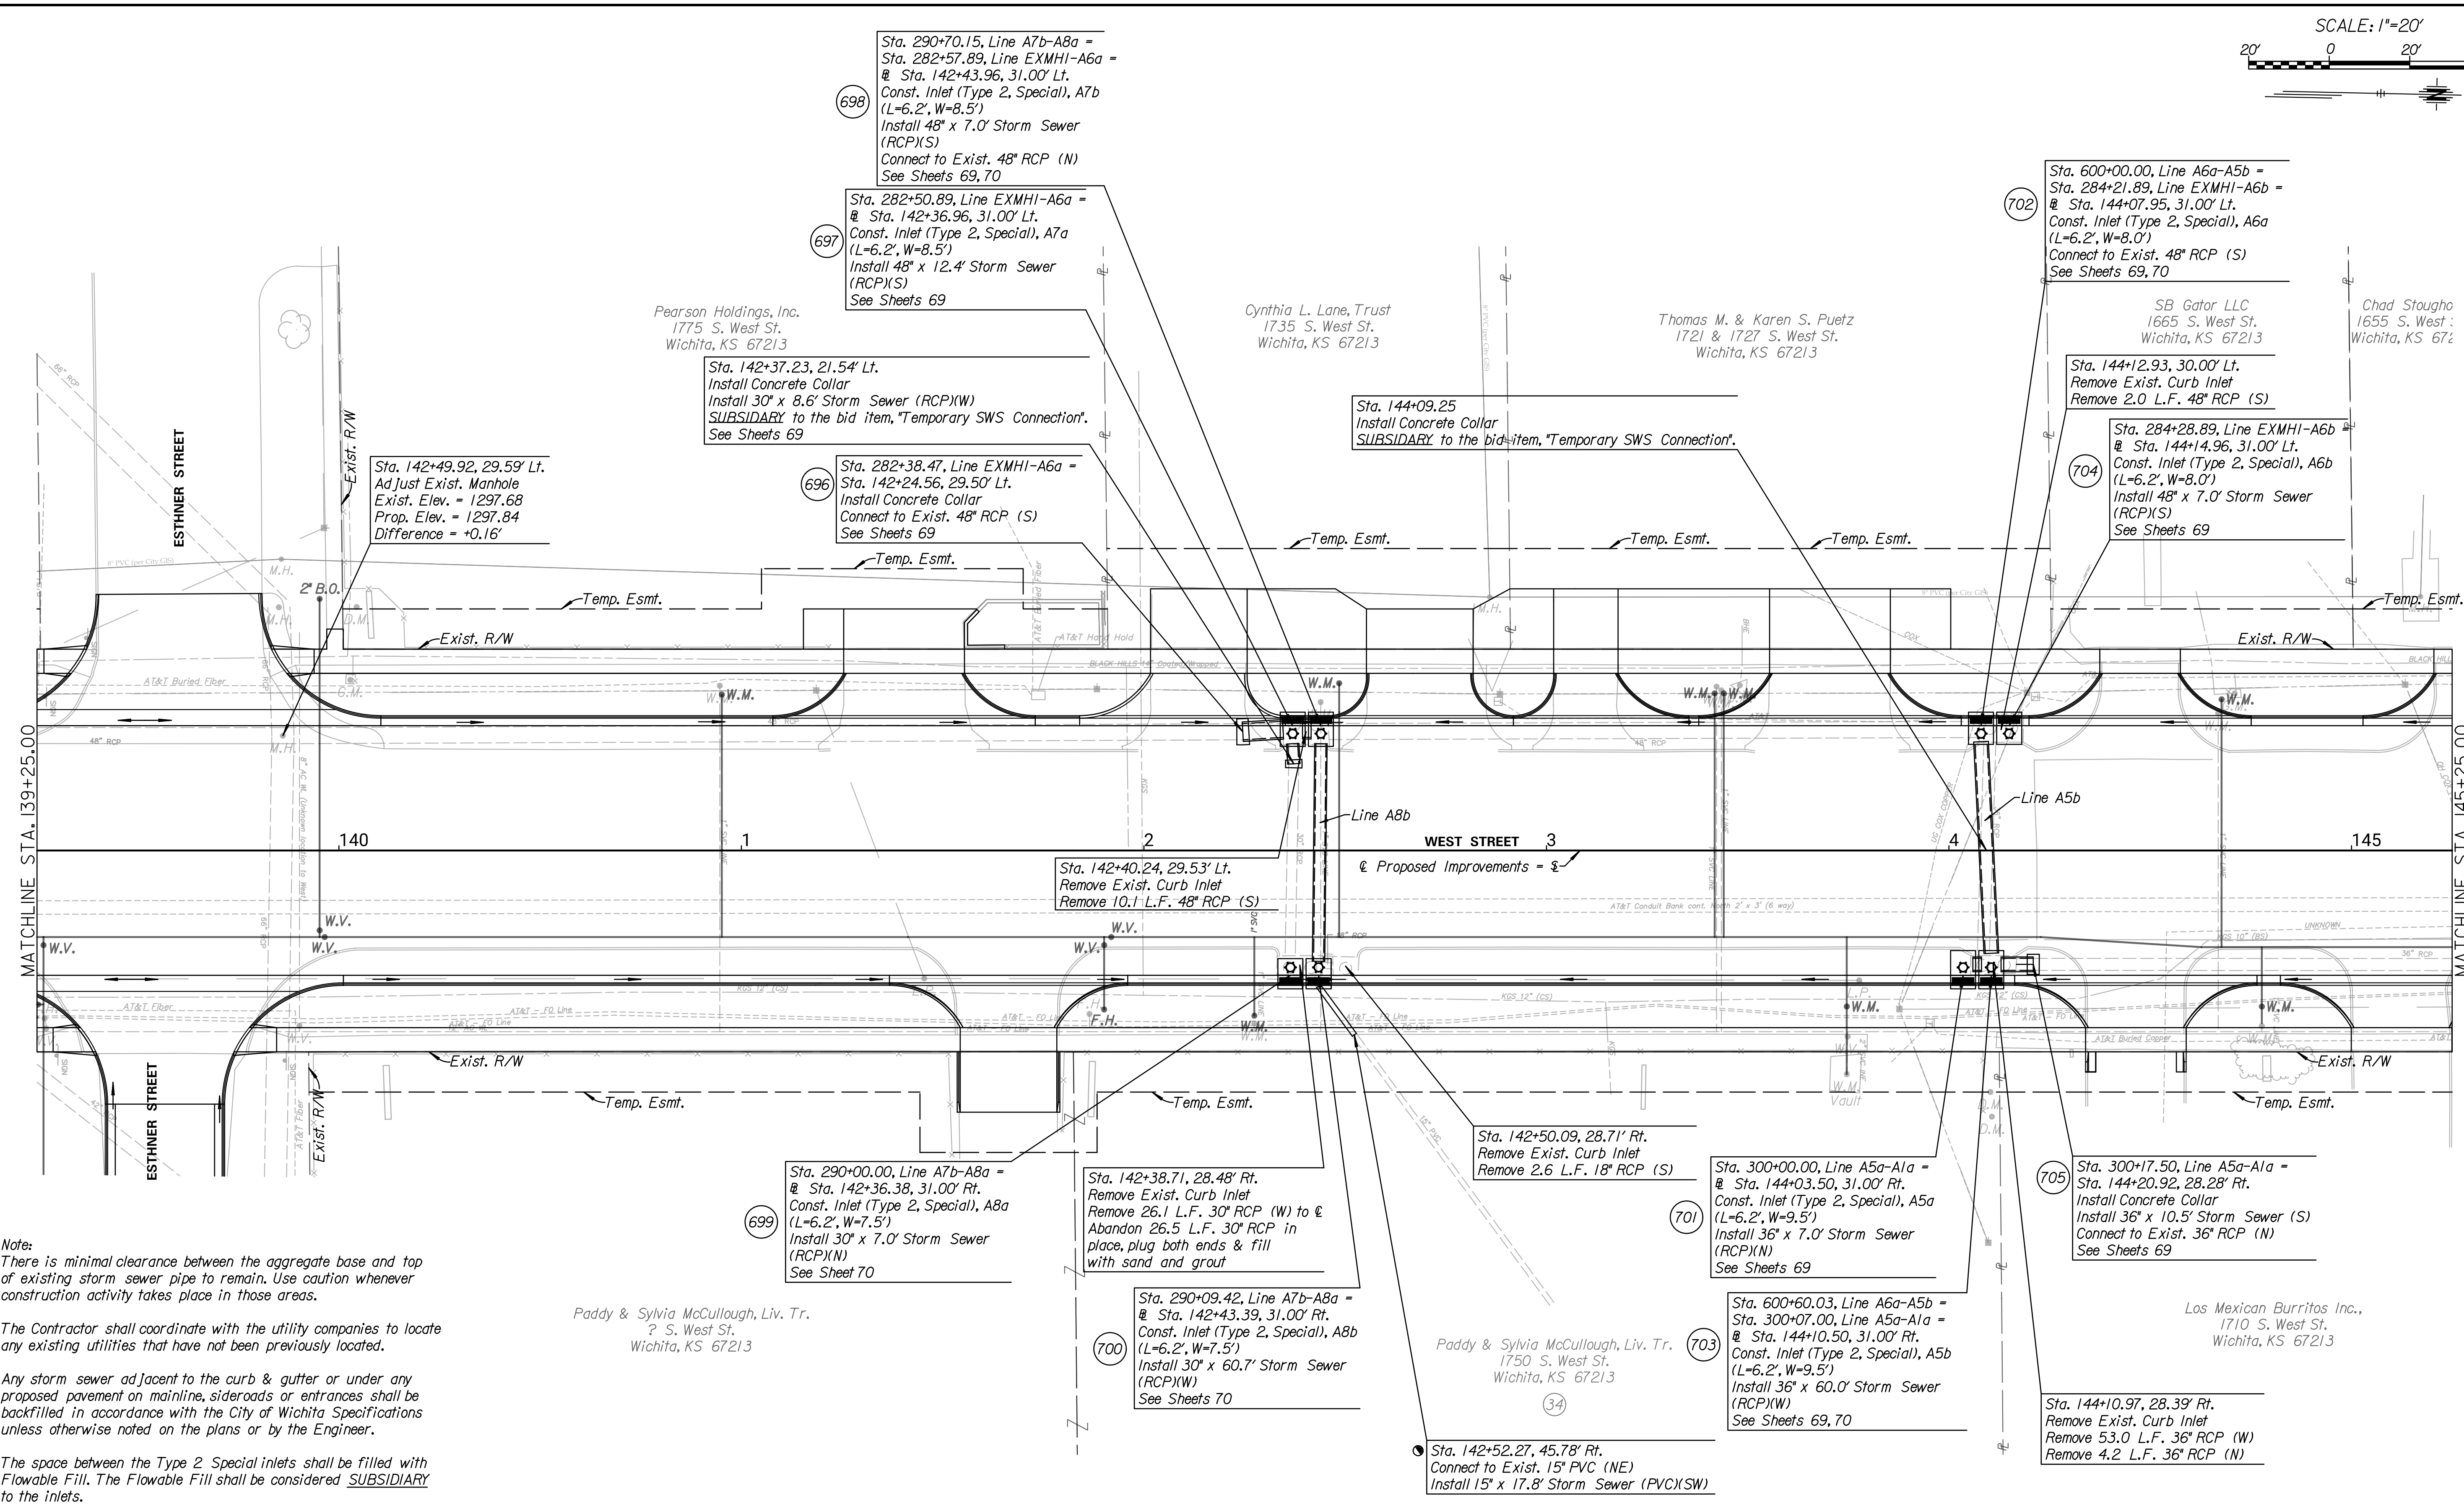

Note:
 There is minimal clearance between the aggregate base and top of existing storm sewer pipe to remain. Use caution whenever construction activity takes place in those areas.

The Contractor shall coordinate with the utility companies to locate any existing utilities that have not been previously located.

Any storm sewer adjacent to the curb & gutter or under any proposed pavement on mainline, sideroads or entrances shall be backfilled in accordance with the City of Wichita Specifications unless otherwise noted on the plans or by the Engineer.

The space between the Type 2, Special inlets shall be filled with Flowable Fill. The Flowable Fill shall be considered SUBSIDIARY to the inlets.

All temporary pipe connections needed to drain the east side of West Street during construction shall be installed during Phase 2 of construction. All pipe, material, labor, and equipment needed to connect the pipe shall be considered SUBSIDIARY to the bid item "Temporary SWS Connection".

The materials & labor required to connect the proposed 15" PVC to the existing 15" PVC at Sta. 142+52.27, 45.78' Rt. shall be considered SIBSIDARY to the bid item "Pipe, SWS 15" (PVC)".

REVISIONS:	DESCRIPTION	DATE	MARK

PROJ NO: 87 N-0720-01
 SCALE: 1"=20'
 DATE: 9/25/2023
 DESIGNED BY: MLC
 DRAWN BY: LCV
 CHECKED BY: MDB

SHEET TITLE:
 WEST STREET STORM SEWER IMPROVEMENTS