


SAVED 10/26/2023 3:26:35 AM BY ROY THOMAS
 PLOTTED 10/26/2023 9:54:01 AM BY ROY THOMAS
 U:\WICHITA-CIVIL\2022\220008\03\MUNI\DRAWINGS\220008-003-L1101.DWG

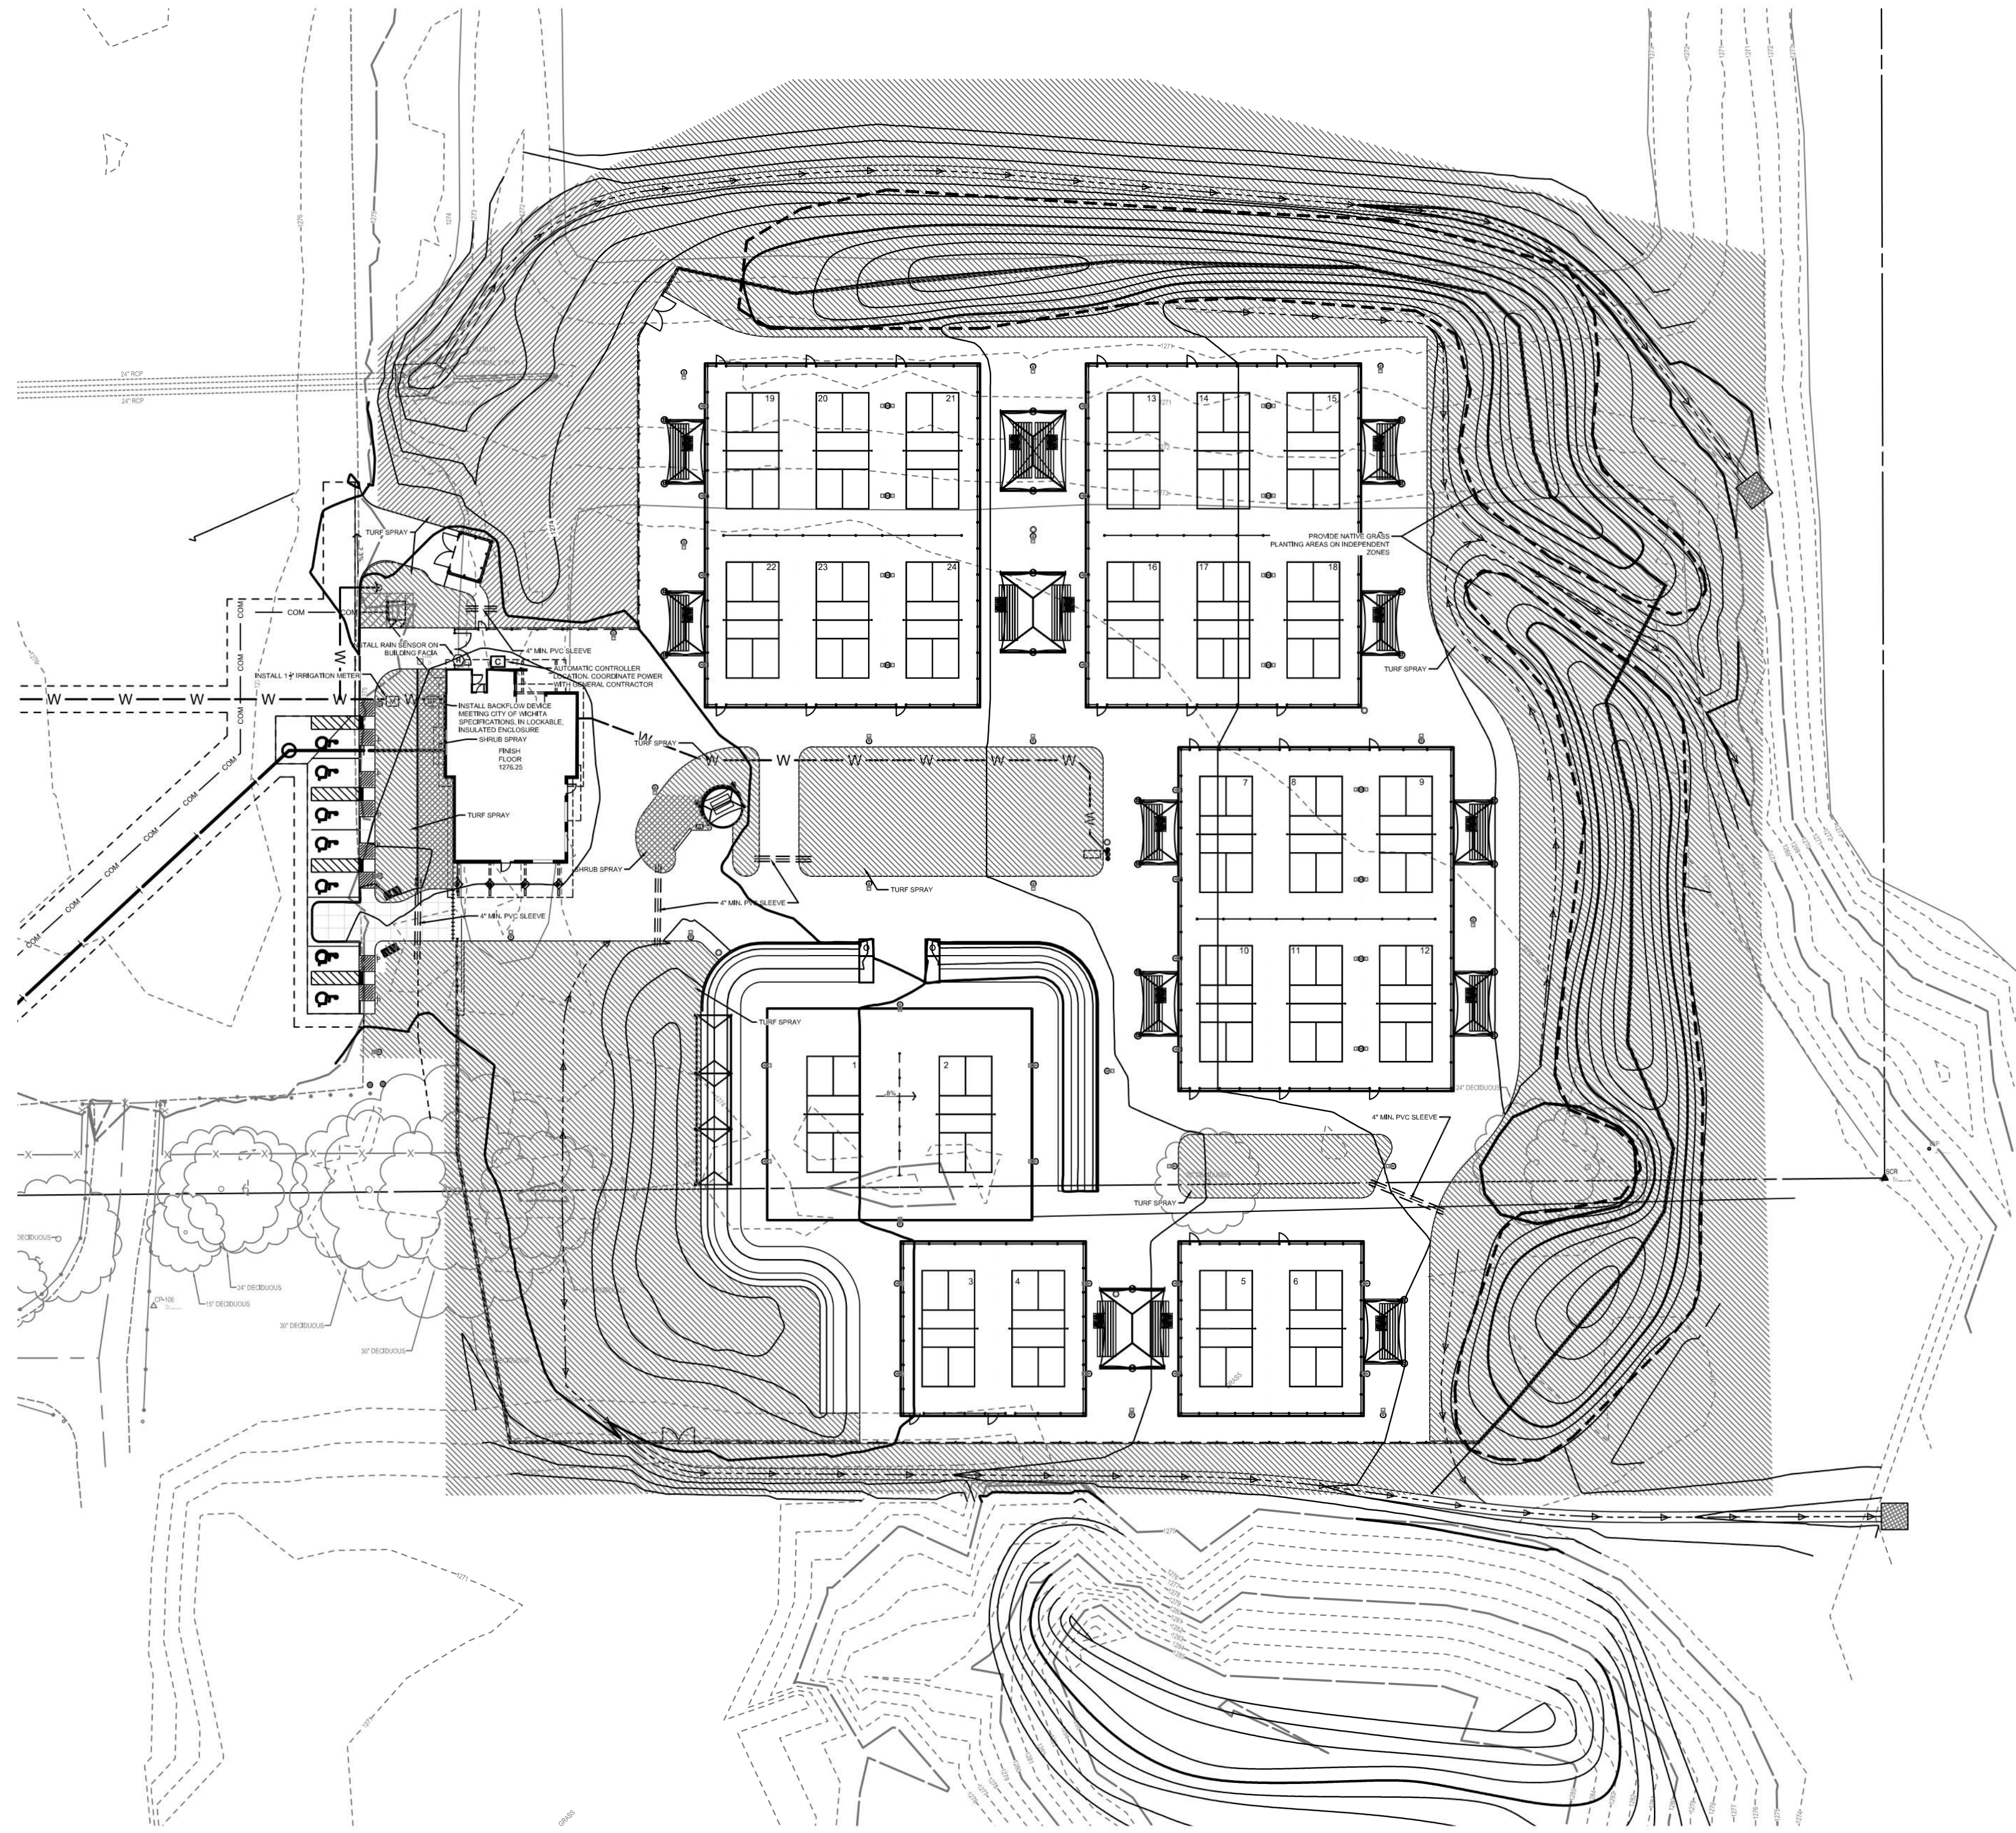

IRRIGATION SCHEDULE

SYMBOL	DESCRIPTION
	SHRUB SPRAY AREA
	TURF SPRAY AREA
SYMBOL	MANUFACTURER/MODEL/DESCRIPTION
	BACKFLOW PREVENTOR DEVICE 2" PRODUCT THAT MEETS CITY OF WICHITA STANDARDS
	AUTOMATIC IRRIGATION CONTROLLER CONTROLLER COMPLYING WITH CITY OF WICHITA SPECIFICATIONS
	REMOTE RAIN SENSOR
	WATER METER 1"
	IRRIGATION MAINLINE: PVC SCHEDULE 40
	PIPE SLEEVE: PVC SCHEDULE 40
	PIPE SLEEVE: PVC SCHEDULE 40 4"

- NOTES:
1. AN IRRIGATION ASSOCIATION CERTIFIED IRRIGATION DESIGNER SHALL DESIGN THE IRRIGATION SYSTEM.
 2. EXISTING IRRIGATION SYSTEM IS IN PLACE FOR A LARGE PORTION OF THE WORK AREA. ENSURE AN OPERABLE SYSTEM REMAINS FOR AREAS OUTSIDE OF THIS PROJECT.
 3. MODIFY IRRIGATION IN THIS FIELD TO PROVIDE OPERABLE SYSTEM AT COMPLETION OF EARTHWORK OPERATIONS.
 4. PROVIDE FULL A FULL DESIGN AS PART OF THE SUBMITTAL PROCESS PRIOR TO INSTALLATION INCLUDING ZONING, VALVE SIZING, LATERAL AND MAINLINE SIZE, AND FLOW AND PRESSURE CALCULATIONS FOR THE LARGEST ZONE AND FURTHEST ZONE FROM WATER SOURCE.




SOUTH LAKES
 SPORTS PARK
 WICHITA, KS

Issue:		
100% PLANS		10/18/23
BID SETS		10/25/23

JOB NO.	220008-003
DATE	18 OCTOBER 2023
PM	NLS
DESIGNED BY	NLS
DRAWN BY	RFT
CHECKED BY	MEB

IRRIGATION CONCEPT PLAN

IRRIGATION CONCEPT PLAN

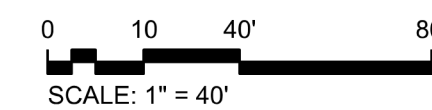

L1101