

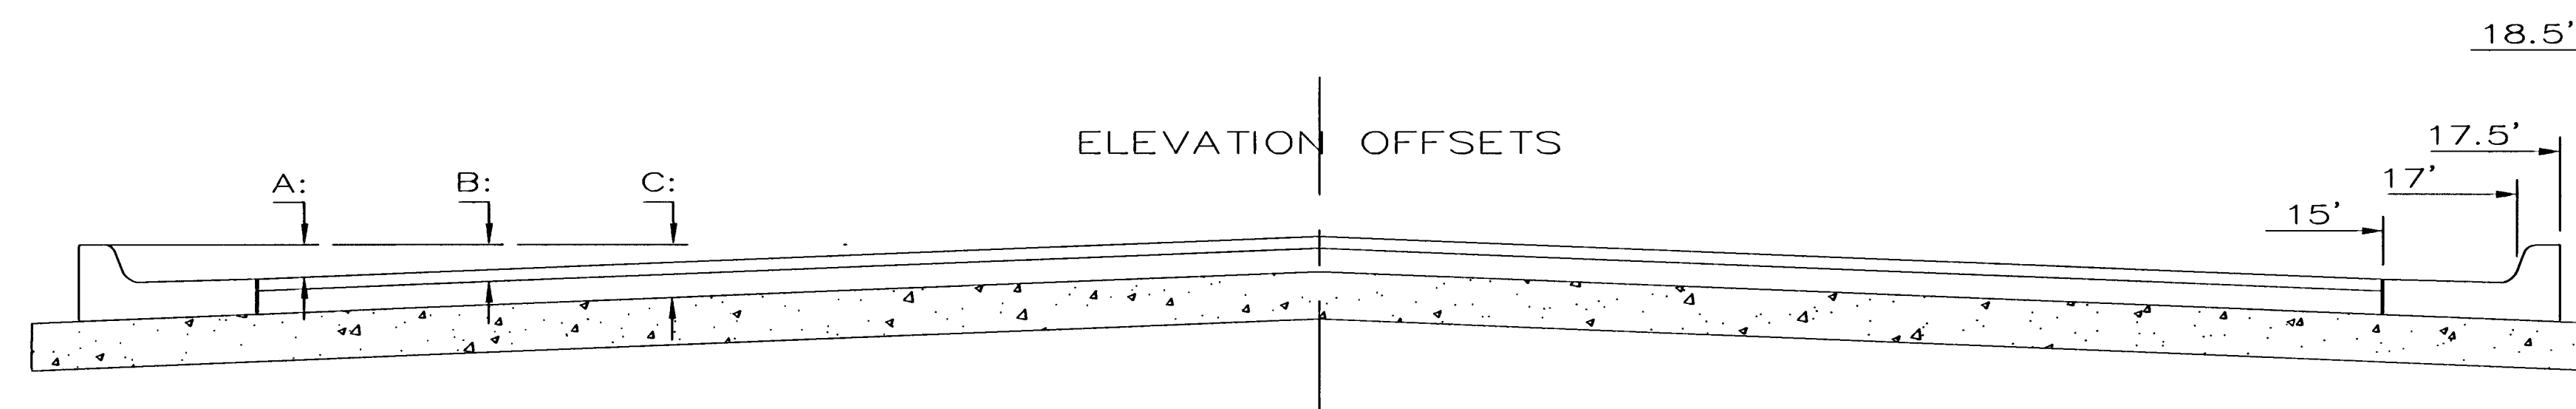


TYPICAL 35' B-B PAVEMENT DETAILS

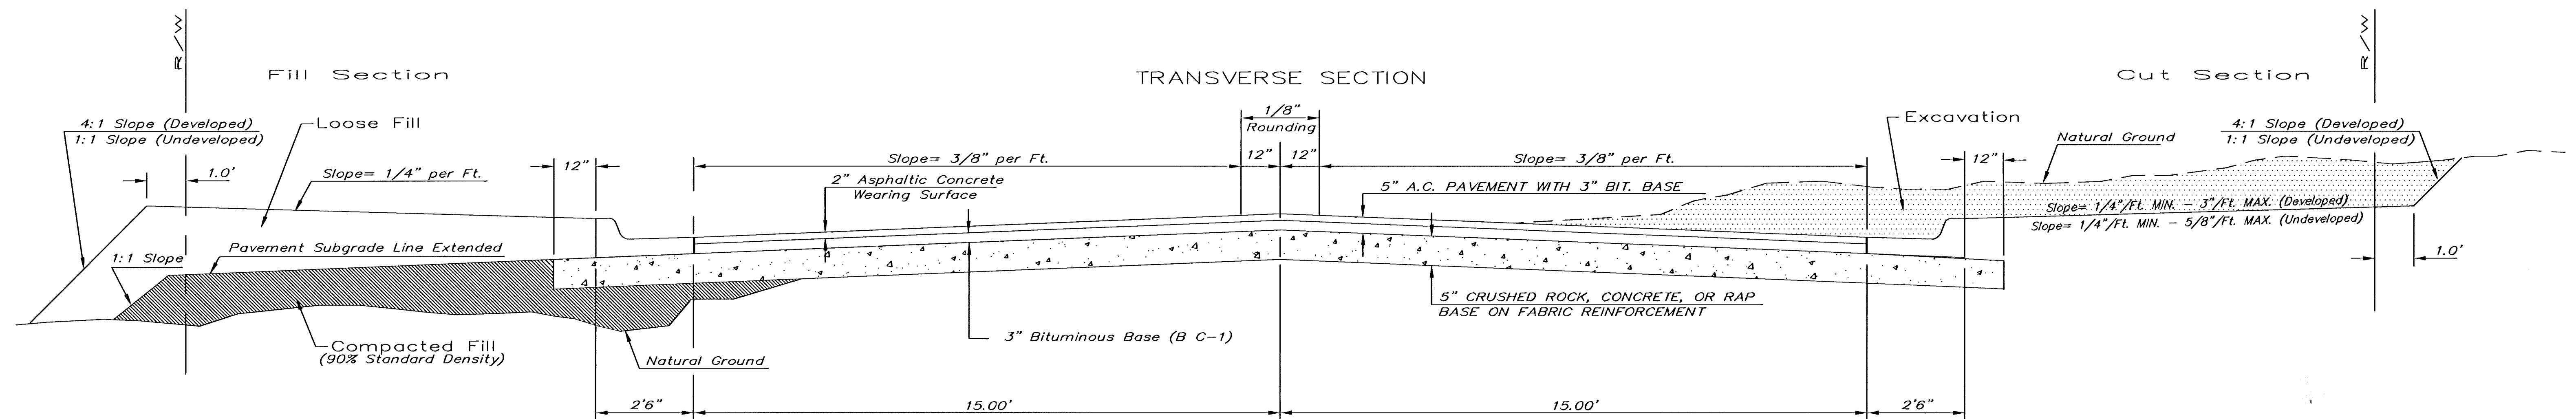


ELEVATION OFFSETS

4'	DISTANCE FROM CENTERLINE (LT. & RT.)											
	0'	2'	6'		8.5'	10'	12'	14'	15'	17'	17.5'	18.5'
A: Top of Curbs to Top of Surface Lift	0.04	0.08	0.14	0.21	0.29	0.33	0.39	0.46	0.49	—	—	—
B: Top of Curbs to Top of Upper Base Lift	0.21	0.25	0.37		0.45	0.50	0.56	0.62	0.65	—	—	—
C: Top of Curbs to Top of C. R. Subgrade	0.46	0.50	0.56	0.63	0.71	0.75	0.81	0.88	0.91	0.97	0.98	1.01

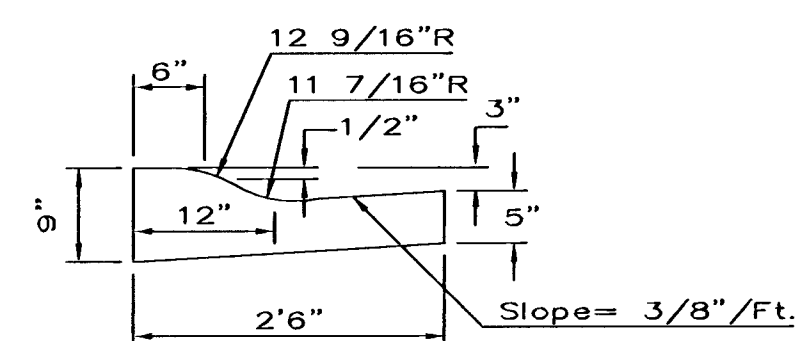

COMBINED ROLL TYPE CURB &
GUTTER

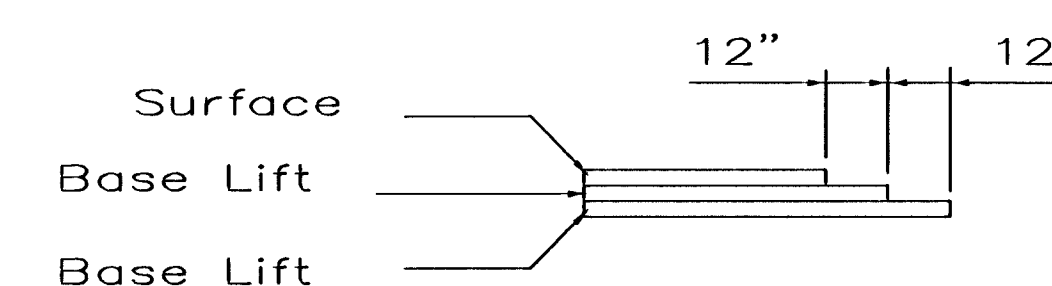

TRANSVERSE CONSTRUCTION JOINTS

Transverse construction joints shall be constructed in flexible base pavements at locations where pavement joints existing flexible base pavement as shown by the detail. All costs associated with the construction of the transverse joint shall be included in the bid price for Square Yards 5" ASPHALTIC CONCRETE (3" BITUMINOUS BASE).

General Notes

FABRIC BASE REINFORCEMENT SHALL BE B X 1100
GEORGIA AS MANUFACTURED BY TENSAR CORPORATION
OR APPROVED EQUAL. FABRIC BASE REINFORCEMENT
SHALL BE INSTALLED IN ACCORDANCE WITH
MANUFACTURER'S RECOMMENDATIONS. WASHED ROCK
SHALL BE UNIFORMLY GRADED FROM 1-1/2" MAXIMUM
SIZE TO NOT MORE THAN 10% PASSING A NO. 200
SIEVE. ROCK QUALITY SHALL BE THE SAME AS
SPECIFIED FOR COARSE AGGREGATE FOR CONCRETE
MIXES.

ROCK BASE IS TO BE COMPACTED AND SMOOTHED WITH A STEEL FACED ROLLER PRIOR TO PLACEMENT OF ASPHALT. TACK COAT WILL NOT BE APPLIED TO ROCK BASE.

A TACK COAT OF EMULSIFIED ASPHALT (SC-1H OR CSS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQUARE YARD BETWEEN EACH LIFT OF ASPHALTIC MATERIAL.

BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR LINE AND GRADE.

CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF ONE (1) FOOT FROM JOINTS IN PRECEDING LIFTS AND PLACED SO THAT A JOINT WILL BE CONSTRUCTED ON THE CENTERLINE OF THE TOP LIFT.

THE ASPHALTIC CONCRETE PAVEMENT BETWEEN THE
COMBINED CURB AND GUTTER SHALL BE PAID AS SQUARE
YARDS OF 5" ASPHALTIC CONCRETE (3" BITUMINOUS BASE.)



 THE CITY OF WICHITA CITY ENGINEER'S OFFICE CITY HALL - SEVENTH FLOOR 455 NORTH MAIN STREET WICHITA, KANSAS 67202 (316) 268-4501 (316) 268-4114 FAX	35' PAVEMENT 5" ASPHALTIC CONCRETE W/ CRUSHED ROCK BASE
JIM ARMOUR P.E. — CITY ENGINEER	
PROJECT NUMBER 472 84253	INDEX CODE 765953
DATE MAR 96	SHEET 3 OF 9