

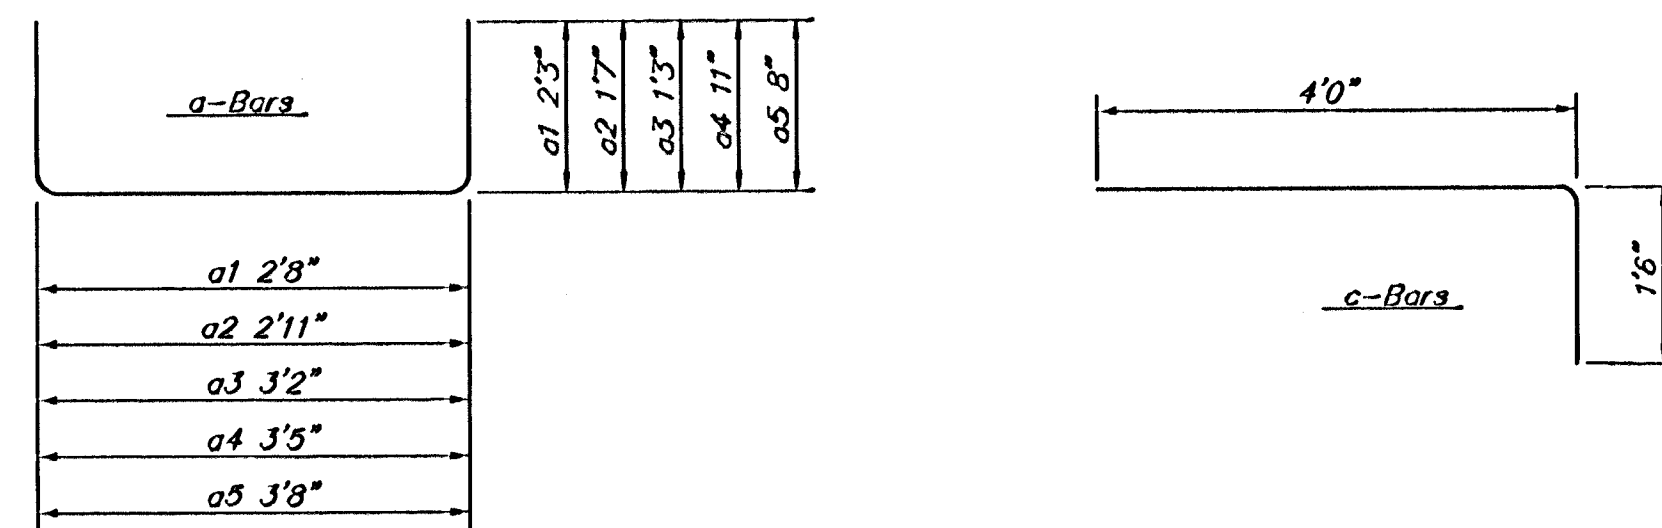
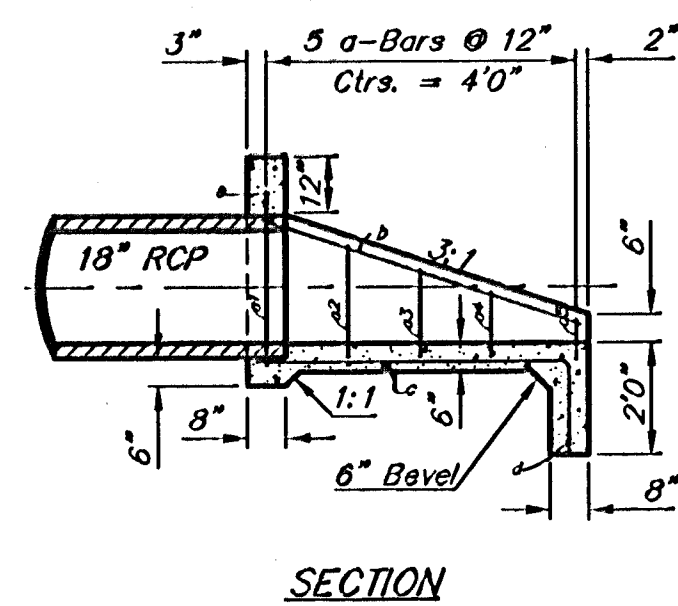
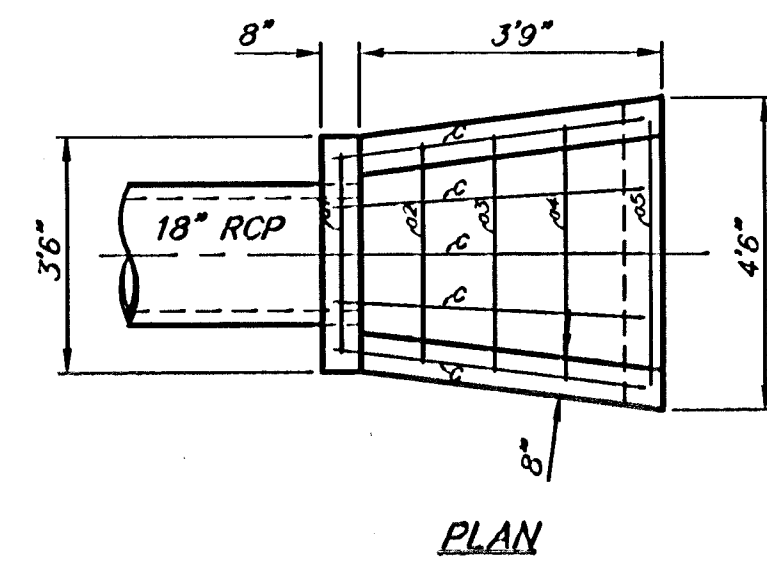
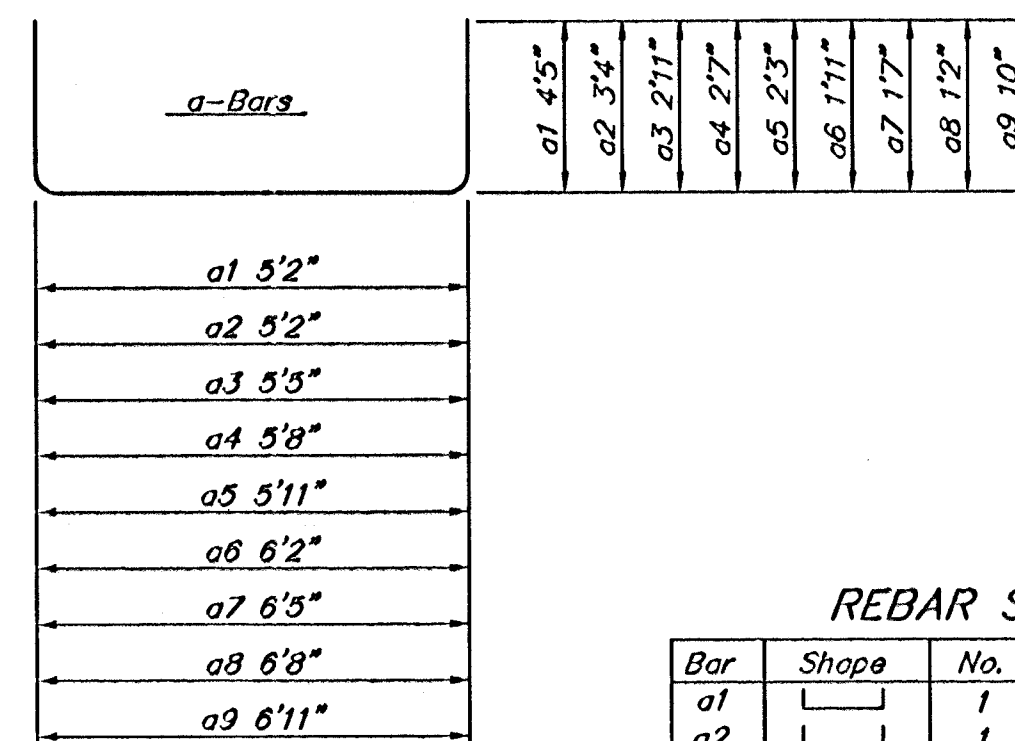


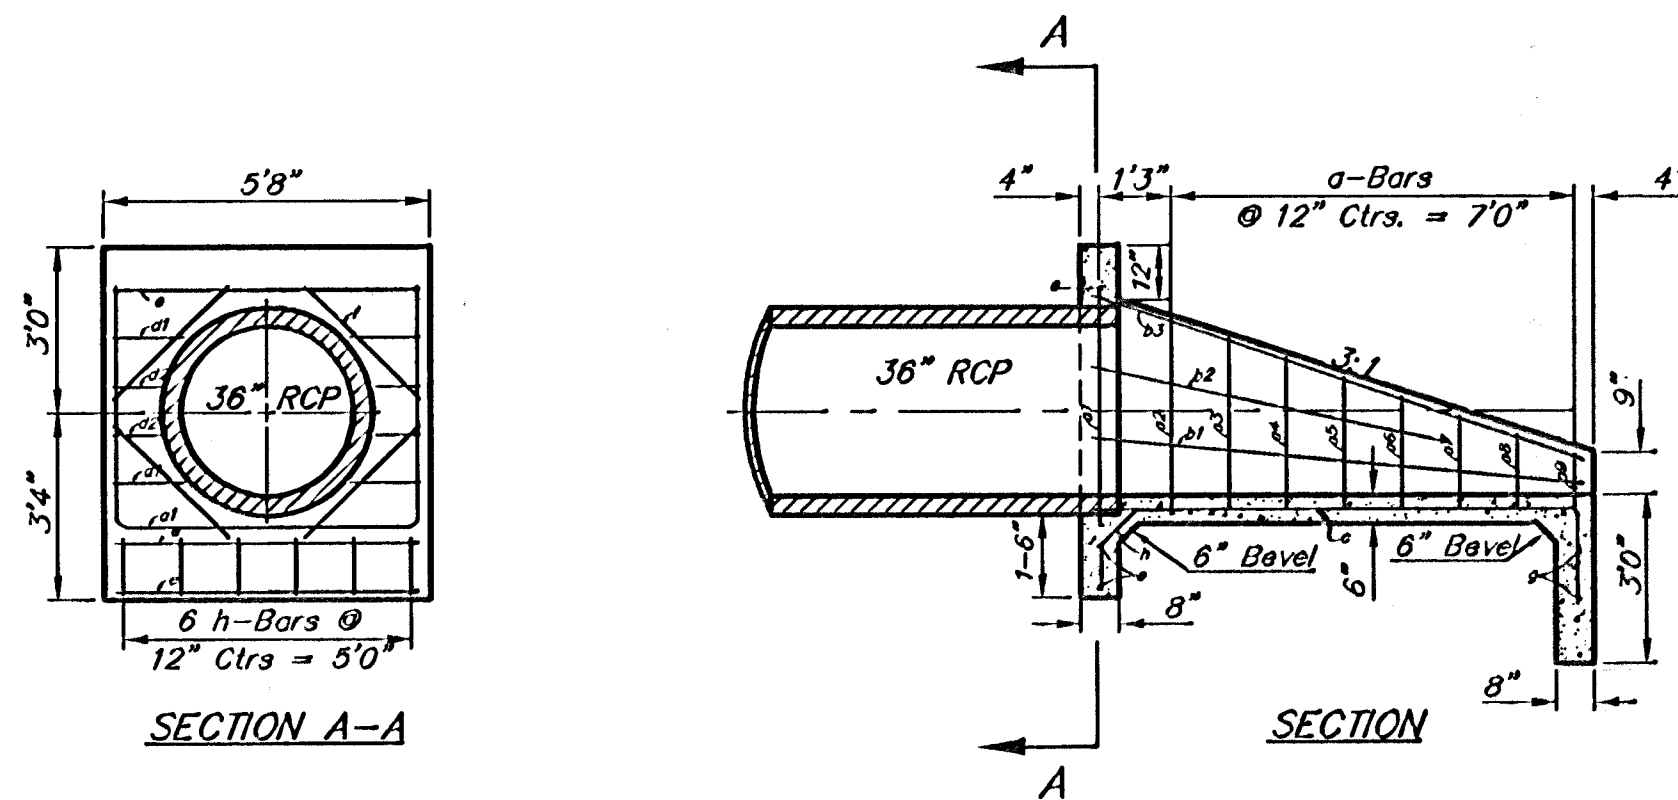

Bar	Shape	No.	Length	Weight
a1	□	1	7'2"	4.79
a2	□	1	6'1"	4.06
a3	□	1	5'8"	3.79
a4	□	1	5'3"	3.51
a5	□	1	5'0"	3.34
b	□	2	4'0"	5.34
c	□	5	5'6"	18.37
d	□	1	4'0"	2.67
e	□	1	3'2"	2.12
Total Rebar			47.99 Lbs.	
Concrete			0.91 C.Y.	

A Deduction in Concrete Quantities Has Been Made for Pipe Openings Through the Headwall.
 * Field Bend or Cut Reinforcing as Required for Clearance.
 All Concrete Reinforcement to be #4 Rebar.
 All Rebar to Have Min. of 1 1/2" Conc. Cover




HEADWALL FOR 18" RCP

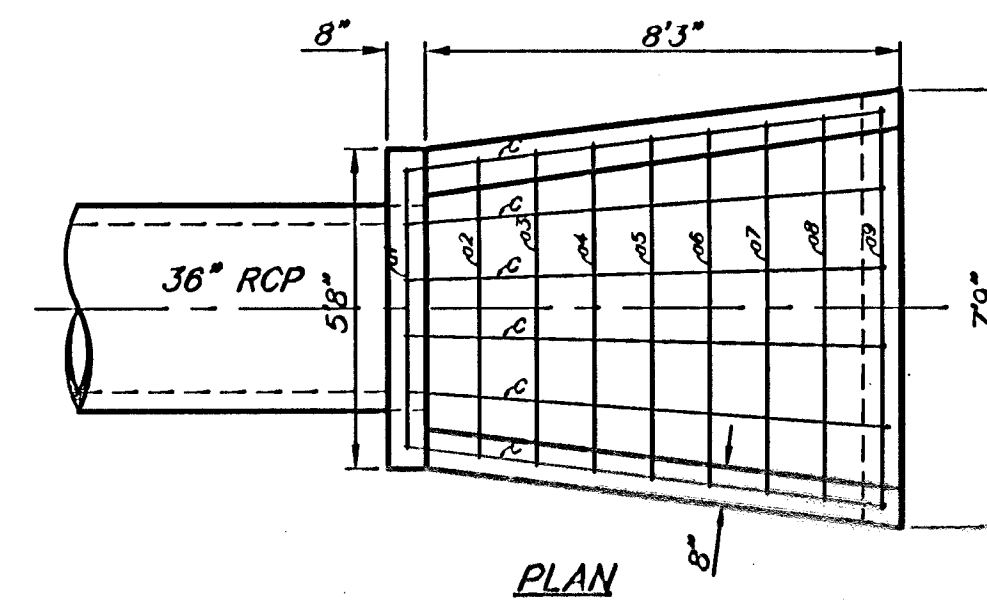

Bar	Shape	No.	Length	Weight
a1	□	1	14'0"	9.35
a2	□	1	11'10"	7.90
a3	□	1	11'3"	7.52
a4	□	1	10'10"	7.24
a5	□	1	10'5"	6.96
a6	□	1	10'0"	6.68
a7	□	1	9'7"	6.40
a8	□	1	9'0"	6.01
a9	□	1	8'7"	5.73
b1	□	2	8'5"	11.24
b2	□	2	4'7"	6.12
b3	□	2	9'0"	12.02
c	□	6	10'4"	41.42
d1	□	4	1'6"	4.01
d2	□	4	10"	2.23
e	□	3	5'4"	10.69
f	□	4	3'0"	8.02
g	□	2	7'0"	9.35
h	□	6	2'6"	10.02
Total Rebar			178.91 Lbs.	
Concrete			3.20 C.Y.	

A Deduction in Concrete Quantities Has Been Made for Pipe Openings Through the Headwall.
 * Field Bend or Cut Reinforcing as Required for Clearance.
 All Concrete Reinforcement to be #4 Rebar.
 All Rebar to Have Min. of 1 1/2" Conc. Cover

HEADWALL FOR 36" RCP

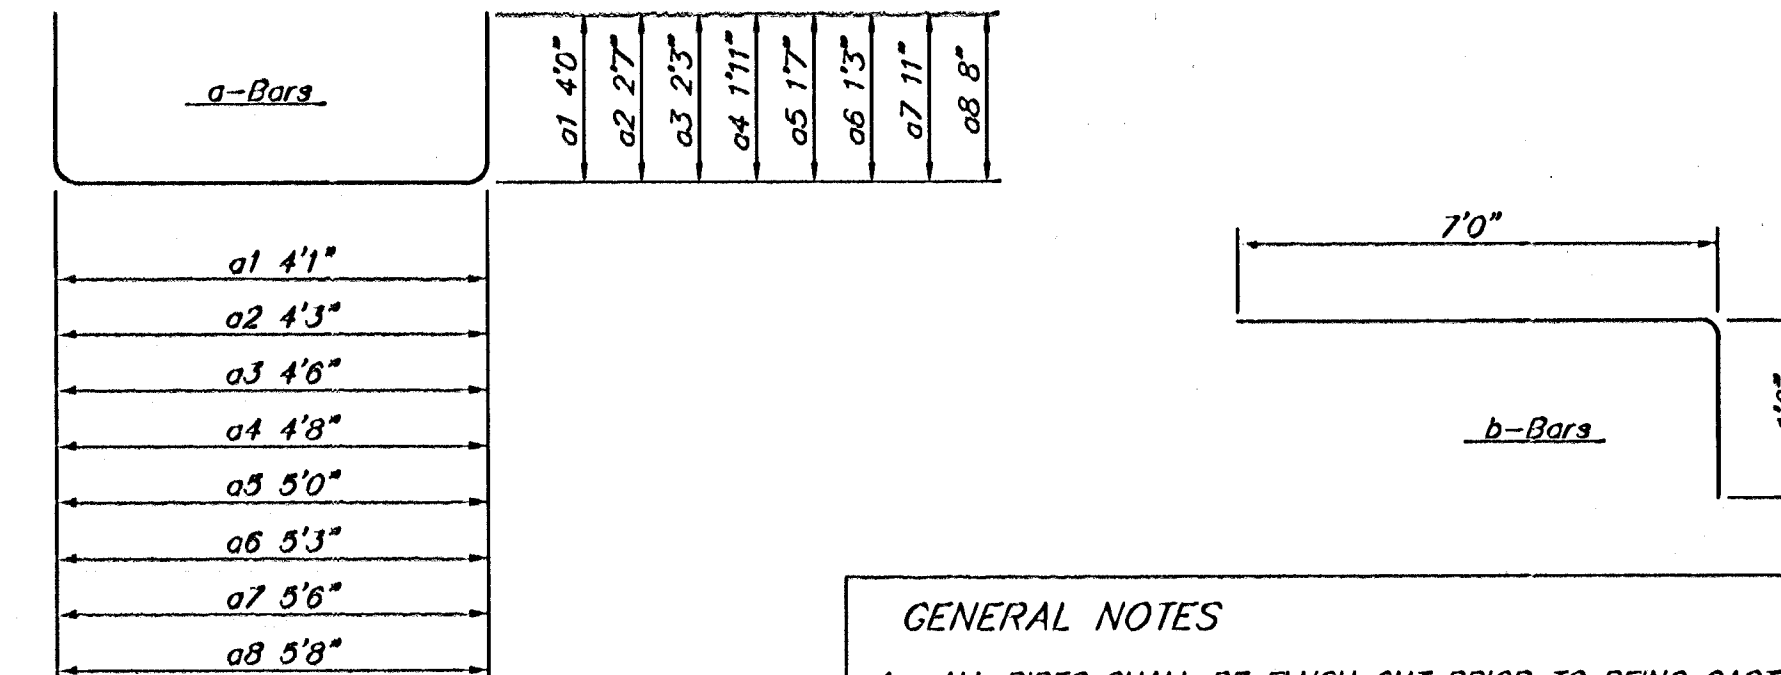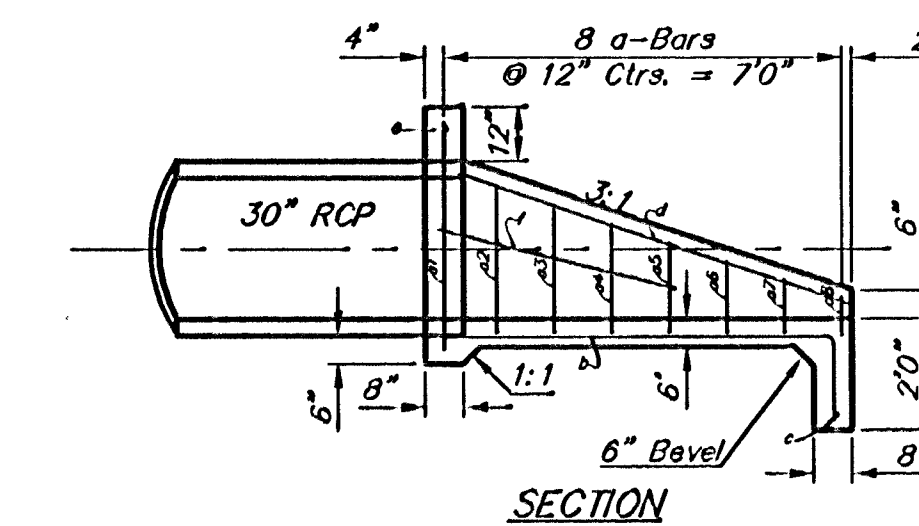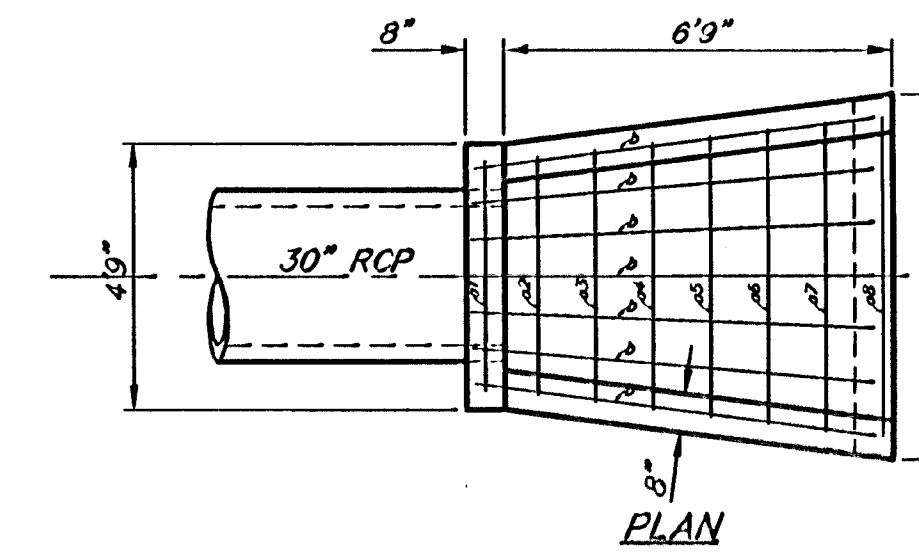

Bar	Shape	No.	Length	Weight
a1	□	1	12'1"	8.07
a2	□	1	9'5"	6.29
a3	□	1	9'0"	6.01
a4	□	1	8'6"	5.68
a5	□	1	8'2"	5.46
a6	□	1	7'9"	5.18
a7	□	1	7'4"	4.90
a8	□	1	7'0"	4.68
b	□	7	8'6"	35.07
c	□	1	6'0"	4.01
d	□	2	7'6"	10.02
e	□	1	4'5"	2.95
f	□	2	4'3"	5.68
Total Rebar			104.00 Lbs.	
Concrete			2.19 C.Y.	

A Deduction in Concrete Quantities Has Been Made for Pipe Openings Through the Headwall.
 * Field Bend or Cut Reinforcing as Required for Clearance.
 All Concrete Reinforcement to be #4 Rebar.
 All Rebar to Have Min. of 1 1/2" Conc. Cover

HEADWALL FOR 30" RCP

- GENERAL NOTES**
- ALL PIPES SHALL BE FLUSH CUT PRIOR TO BEING CAST INTO CONCRETE HEADWALL.
 - CONCRETE USED IN HEADWALL CONSTRUCTION SHALL BE SAME AS PER CITY STANDARD PAVING MIX EXCEPT THAT IT SHALL HAVE A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 4000 PSI.
 - ALL EXPOSED EDGES SHALL BE BEVELED 1/2".
 - REINFORCING STEEL SHALL COMPLY TO A.S.T.M. DESIGNATION A615 GRADE 60. ALL DIMENSIONS RELATIVE TO REINFORCING STEEL ARE TO CENTERLINE OF BAR UNLESS OTHERWISE NOTED.
 - THE "REIN. CONC. HEADWALL" SHALL BE PAID FOR AT THE UNIT PRICE BID PER EACH IN PLACE WHICH SHALL INCLUDE ALL LABOR, MATERIALS, EXCAVATION, CONCRETE, REINFORCING STEEL AND ALL OTHER INCIDENTAL ITEMS NECESSARY TO COMPLETE THE WORK. MATERIAL QUANTITIES SHOWN ARE FOR INFORMATION ONLY.

Baughman		Headwall Details	
Baughman Company, P.A. 315 Ellis St. Woburn, MA 01801 P: 315-252-7171 F: 315-252-0149			
PROJECT NUMBER 47284059		DESIGN Staff	DRAWN Staff
REVISIONS		APPROVED	DATE
		SCALE NONE	
		SHEET 33 OF 51	
Details/Sewer/Headwall			