

Benchmarks:

City of Wichita Benchmark located
41.60' North and 69.00' East of the
Centerlines of Hoover and MacArthur
(39th St. South)

Elevation = 121.22 (City Datum)

City of Wichita Benchmark located
at East end of Bridge over the Big
Ditch on MacArthur in the West bound
lane.

Elevation = 116.52 (City Datum)

Sta 0+00, Line 4
Begin Construction of 18" RCP
w/ RC Headwall and 20.0 S.Y.
Light Stone Rip-Rap.

RESERVE "A"

Sta 1+37.5, Line 4
Construct Std. Manhole
(4' Dia.)
Top Elev. = 99.10

Sta 3+09.9 to Sta 3+51.3
Install 41.4 L.F. Flowable
Fill Per City Specs.

Sta 3+51.3, End Line 4
Construct Std. Type
1A Inlet (10'x3')
Top Elev. = 102.20


Remove Existing Asphalt
Pavement as Necessary
for SWS Const. Cost of
Removal to be Included
in Bid Item "Site Clearing
and Restoration."

Sta 3+09.9, Line 4
Construct Std. Type
1A Inlet (10'x3')
Top Elev. = 102.20

Remove Existing Fence
as Necessary for SWS
Const. Cost of Fence
Removal to be Included
in Bid Item "Site Clearing
and Restoration."

Note: Contractor shall Remove Trees
only as Necessary to Construct Sanitary
Sewer Line. Cost of Tree Removal shall
be Included in Bid Item "Site Clearing
and Restoration."

Scale: 1" = 20' Horizontal
1" = 5' Vertical
● = Iron

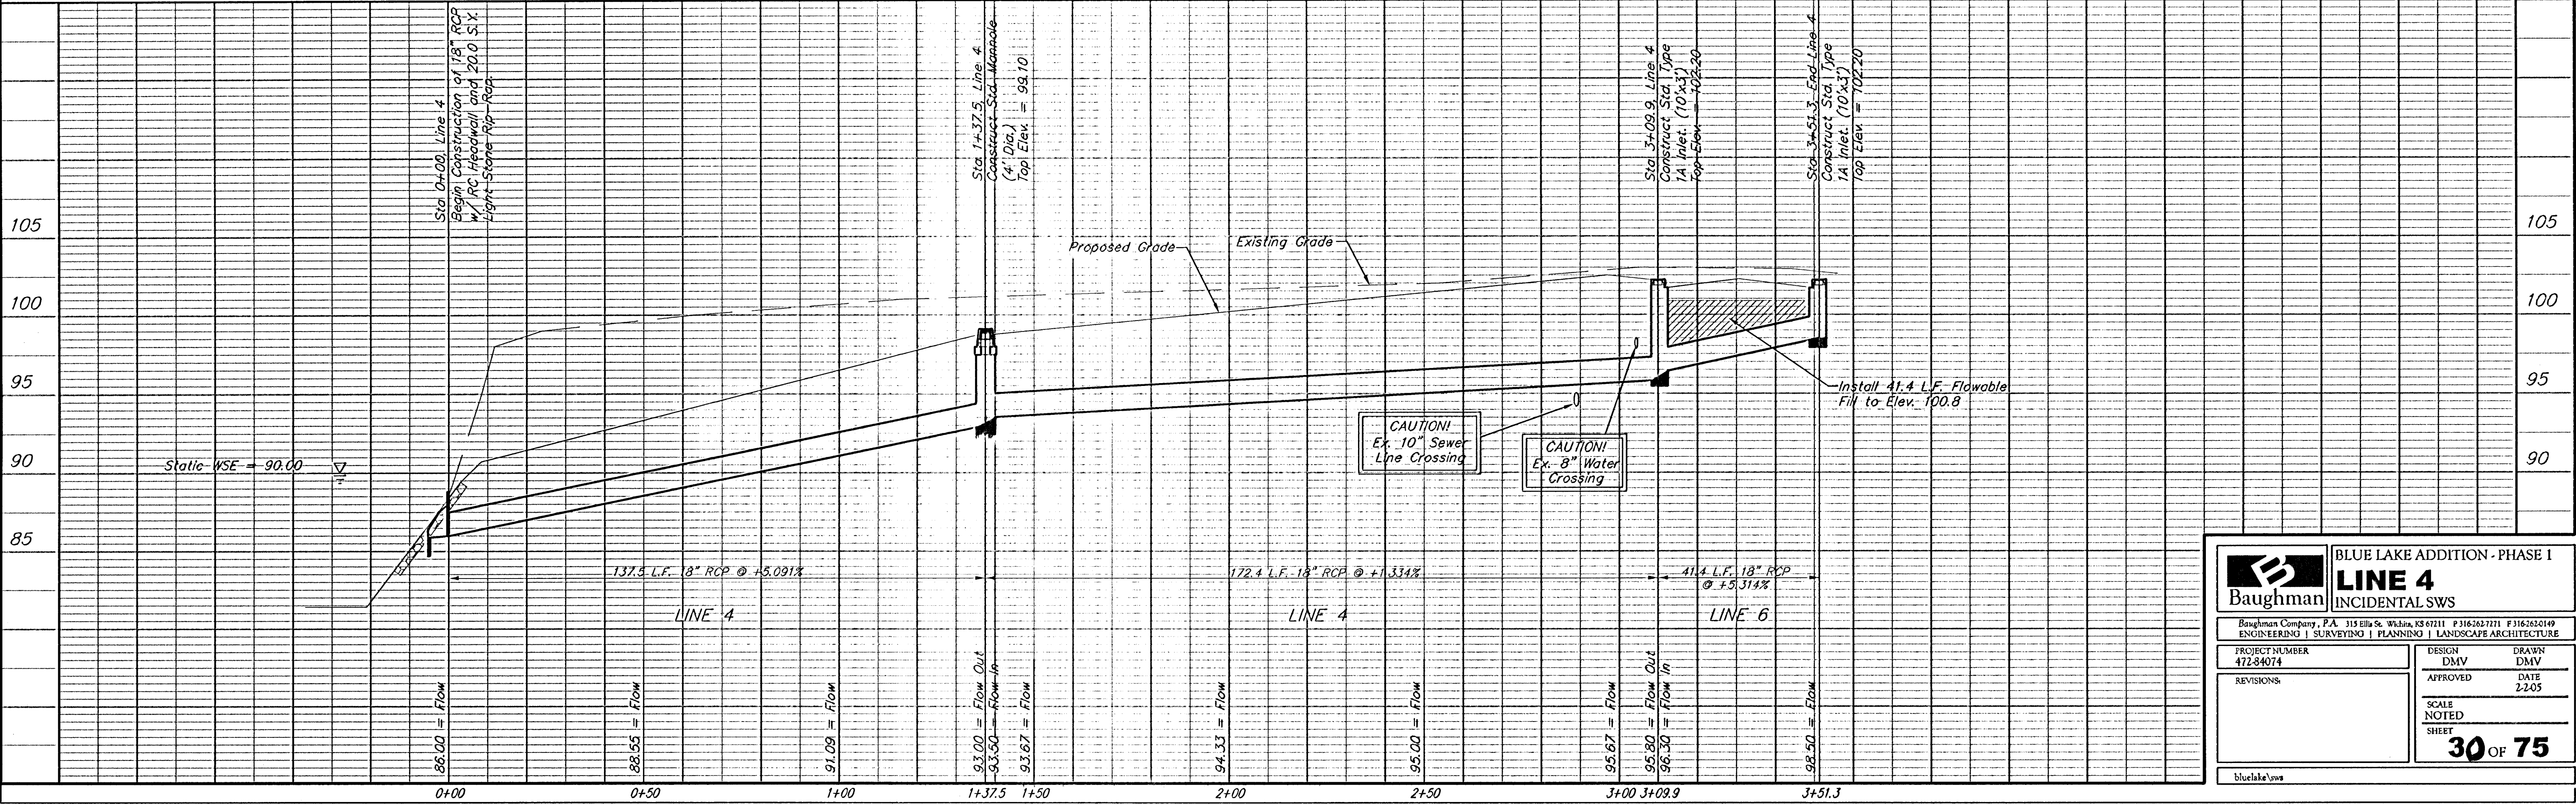

**Baughman**

BLUE LAKE ADDITION - PHASE 1
LINE 4
INCIDENTAL SWS

PROJECT NUMBER
472-34074

DESIGN
DMV

APPROVED
DATE
2-205

REVISIONS

SCALE
NOTED
SHEET
30 OF 75

bluelake.sws