

Pavement Markings \ Signing this side to be done as part of C.I.P. MERIDIAN KDOT PROJ # 87N 0080 01 (1998)

Pavement Markings \ Signing this side to be done as part of C.I.P. CENTRAL - West to McLean KDOT PROJ # 87N 0094 01 (1998)

PAVEMENT MARKING QUANTITIES - PROJECT TOTALS

Material	100mm YELLOW	300mm YELLOW	100mm WHITE	150mm WHITE	200mm WHITE	300mm WHITE	600mm WHITE	STD LT ARROW	THRU-RT ARROW
MARK01	399.1	0.0	282.2	228.1	71.4	0.0	49.3	7	3
TOTALS	405	0.0	285	230	75	0.0	50	7	3

NOTE
Signing not included as part of this project: to be paid for, and installed by "Others"


TABLE FOR INFORMATION ONLY

TYPE	SIGN FACE DESCRIPTION	SIZE (mm)	INSTALL	RELOCATE
D-3	STREET NAME SIGN ASSEMBLY	750 x 1500	0	
R2-1	SPEED LIMIT	500 x 750	1	
R3-6R	THRU-RIGHT TURN (STW)	750 x 750	2	
R3-7L	LEFT LANE MUST TURN LEFT	750 x 750	4	
W4-3	ADDED LANE (RIGHT)	750 x 750	1	
W11A	PEDESTRIAN	500 x 750	1	
W11A-2	PEDESTRIAN CROSSING	750 x 750	1	
W12-1	DIVIDED ROADWAY	1200 x 1200	2	
OEM	DIAMOND HAZARD PANEL (Yellow)	500 x 500	6	

Pavement Marking General Notes

- All pavement markings shall conform to the current standards set forth in the latest publication of the "Manual on Uniform Traffic Control Devices".
- All pavement markings shall be the 'Cold-laid Plastic Tape' type (white and yellow), meeting the required specifications of the Kansas Department of Transportation (KDOT).
- Installation of marking tapes on other than new asphaltic concrete pavement (i.e. concrete pavements; existing A.C. surfaces, etc.) shall be accomplished in accordance with installation specifications for cold-laid markings.
- Where new asphaltic concrete pavement is being constructed, the new pavement markings must be installed while the new wearing surface is still warm (at least 130°F - 54.44°C) and rolled, so as to inlay the pavement markings into the new pavement surface.
- Minimum distance between pavement joints, edge of paver (crosswalks, etc.) and the new pavement markings shall be 51 millimeters (51mm) minimum, and 76 millimeters (76mm) maximum.
- Prior to the installation of cold-laid plastic marking tape over concrete pavement, the Contractor shall grind the surface of the concrete.

TYPICAL STREET SIGNING THIS PROJECT

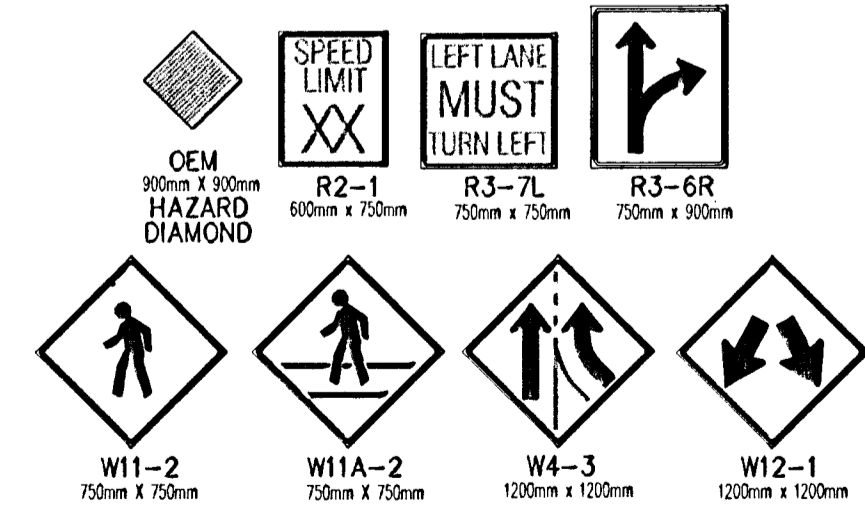

METRIC