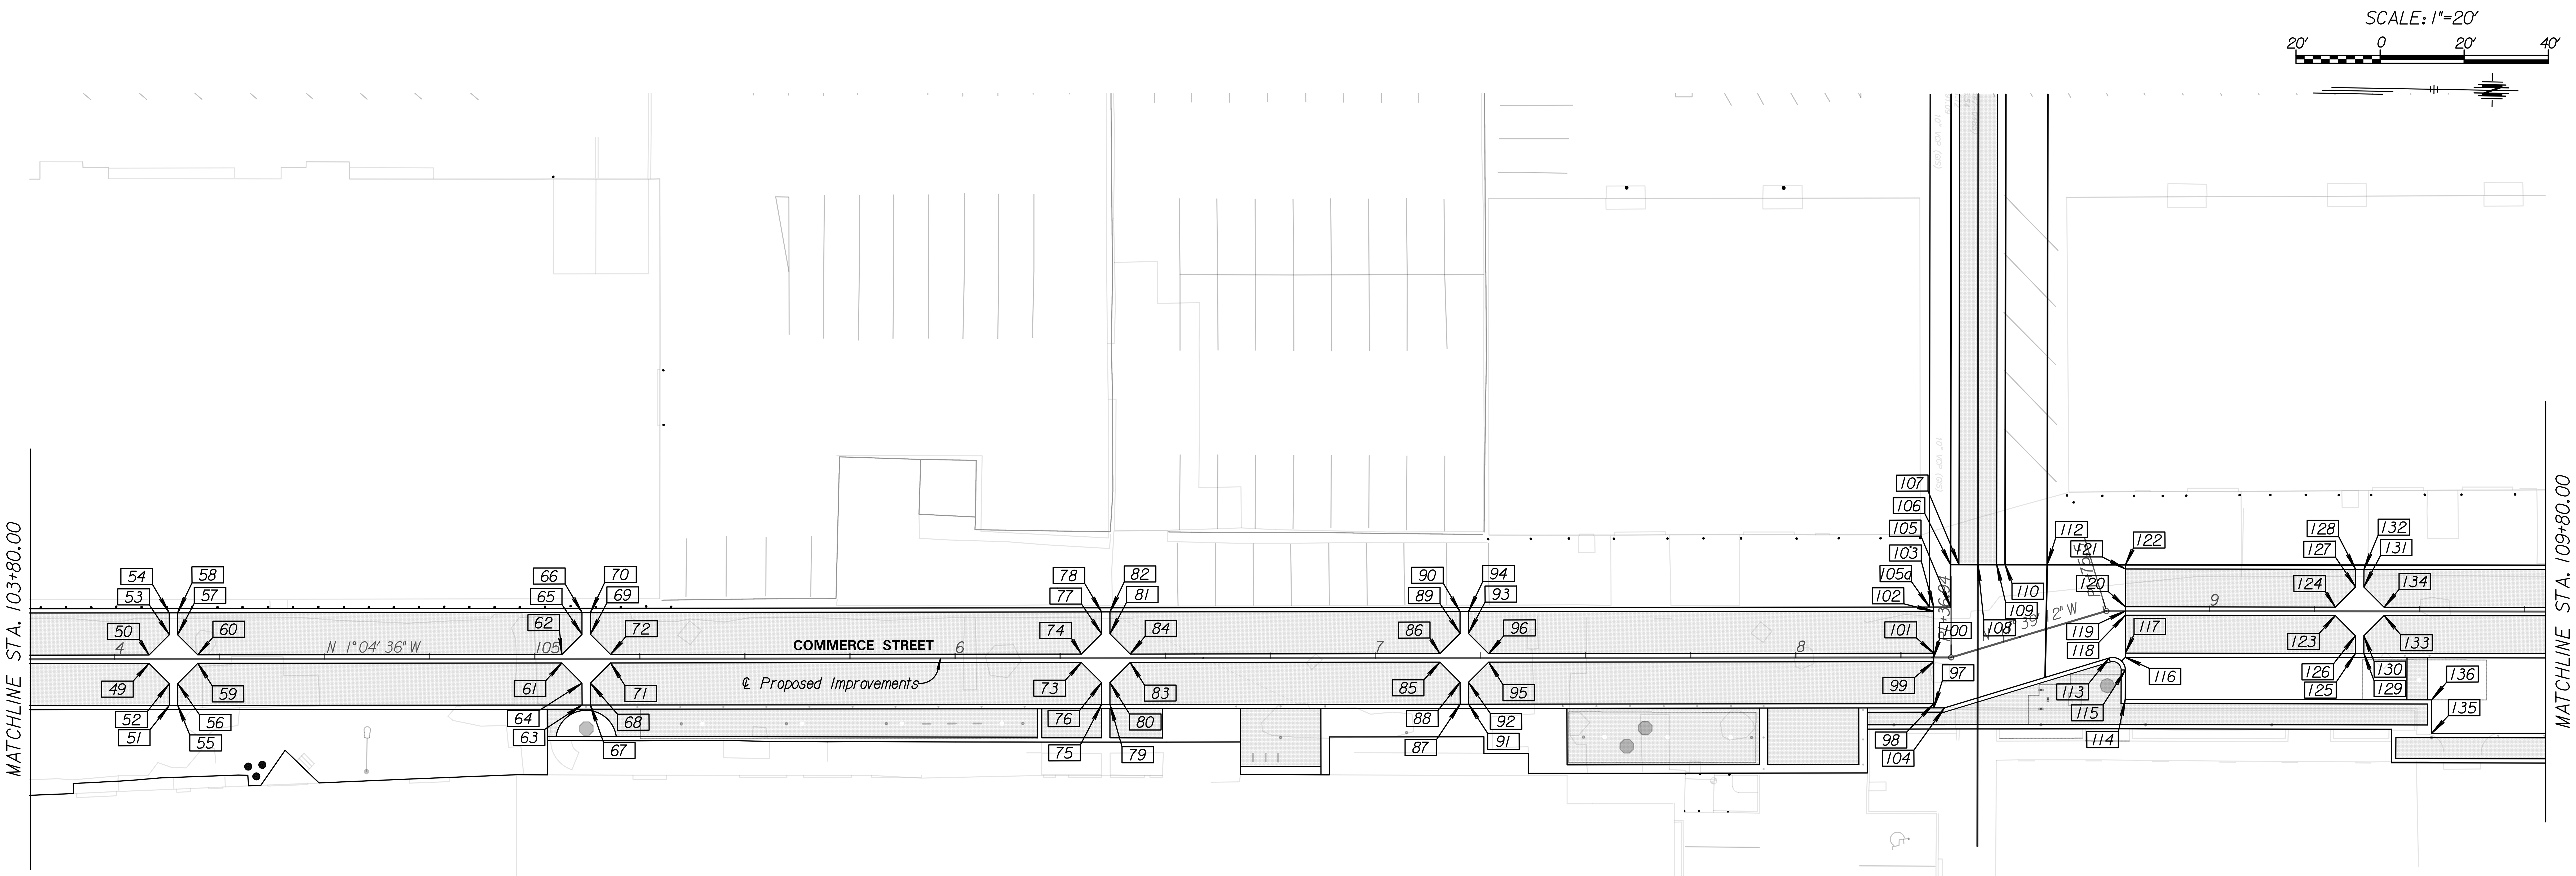

	STATION	OFFSET	DESCRIPTION
49	104+08.26	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
50	104+08.26	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
51	104+13.07	11.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
52	104+13.07	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
53	104+13.07	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
54	104+13.07	11.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
55	104+15.07	11.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
56	104+15.07	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
57	104+15.07	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
58	104+15.07	11.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
59	104+19.87	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
60	104+19.87	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
61	105+06.44	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
62	105+06.44	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
63	105+11.24	11.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
64	105+11.24	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
65	105+11.24	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
66	105+11.24	11.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
67	105+13.24	11.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
68	105+13.24	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
69	105+13.24	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
70	105+13.24	11.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
71	105+18.05	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
72	105+18.05	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
73	106+30.04	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
74	106+30.04	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
75	106+34.84	11.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
76	106+34.84	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
77	106+34.84	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
78	106+34.84	11.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
79	106+36.84	11.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
80	106+36.84	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
81	106+36.84	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
82	106+36.84	11.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
83	106+41.65	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
84	106+41.65	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
85	107+15.33	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
86	107+15.33	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
87	107+20.13	11.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
88	107+20.13	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
89	107+20.13	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
90	107+20.13	11.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
91	107+22.13	11.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
92	107+22.13	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)

	STATION	OFFSET	DESCRIPTION
93	107+22.13	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
94	107+22.13	11.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
95	107+26.93	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
96	107+26.93	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
97	108+32.79	12.00' Rt.	End 11" Concrete Pavement (Reinforced); Begin 7" Concrete Pavement (Reinforced)
98	108+32.79	11.00' Rt.	End Brick Pavers on 7" Concrete Pavement; End 11" Concrete Pavement (Reinforced); Begin 7" Concrete Pavement (Reinforced)
99	108+32.79	1.00' Rt.	End Brick Pavers on 7" Concrete Pavement; End 11" Concrete Pavement (Reinforced); Begin 7" Concrete Pavement (Reinforced)
100	108+32.79	-	End 11" Concrete Pavement (Reinforced); Begin 7" Concrete Pavement (Reinforced)
101	108+32.79	1.00' Lt.	End Brick Pavers on 7" Concrete Pavement; End 11" Concrete Pavement (Reinforced); Begin 7" Concrete Pavement (Reinforced)
102	108+32.79	11.00' Lt.	End Brick Pavers on 7" Concrete Pavement; End 11" Concrete Pavement (Reinforced); Begin 7" Concrete Pavement (Reinforced)
103	108+32.79	12.00' Lt.	End 11" Concrete Pavement (Reinforced); Begin 7" Concrete Pavement (Reinforced)
104	108+35.34	12.00' Rt.	Corner Point (E.O.P.); Edge of 7" Concrete Pavement (Reinforced)
105	108+40.22	11.54' Lt.	Corner Point (E.O.P.); End 7" AC Pavement; Edge of 7" Concrete Pavement (Reinforced)
105a	108+31.79	12.00' Lt.	Corner Point (E.O.P.); Begin 7" AC Pavement; Match Existing
106	108+43.12	21.21' Lt.	Edge of 7" Concrete Pavement (Reinforced); Begin 10" Concrete Pavement (Reinforced)
107	108+45.04	20.63' Lt.	End 10" Concrete Pavement (Reinforced); Begin Brick Pavers on 7" Concrete
108	108+49.35	19.34' Lt.	Edge of 7" Concrete Pavement (Reinforced); Edge of Brick Pavers on 7" Concrete
109	108+53.66	18.05' Lt.	End Begin Brick Pavers on 7" Concrete; Begin 10" Concrete Pavement (Reinforced)
110	108+55.58	17.47' Lt.	End of 10" Concrete Pavement (Reinforced); Begin 7" AC Pavement
112	108+65.15	14.59' Lt.	Corner Point (E.O.P.); End 7" AC Pavement; Match Existing
113	108+72.91	10.89' Rt.	Begin 3.0' Radius (E.O.P.)
114	108+80.02	21.00' Rt.	Corner Point (E.O.P.); 7" Concrete Pavement (Reinforced)
115	108+80.02	14.05' Rt.	End 3.0' Radius (E.O.P.)
116	108+80.02	11.00' Rt.	Begin 11" Concrete Pavement (Reinforced)
117	108+80.02	10.00' Rt.	End 7" Concrete Pavement (Reinforced); Begin Brick Pavers on 7" Concrete Pavement; Begin 11" Concrete Pavement (Reinforced)
118	108+80.02	1.00' Rt.	End 7" Concrete Pavement (Reinforced); Begin Brick Pavers on 7" Concrete Pavement; Begin 11" Concrete Pavement (Reinforced)
119	108+80.02	-	End 7" Concrete Pavement (Reinforced); Begin 11" Concrete Pavement (Reinforced)
120	108+80.02	1.00' Lt.	End 7" Concrete Pavement (Reinforced); Begin Brick Pavers on 7" Concrete Pavement; Begin 11" Concrete Pavement (Reinforced)
121	108+80.02	10.00' Lt.	End 7" Concrete Pavement (Reinforced); Begin Brick Pavers on 7" Concrete Pavement; Begin 11" Concrete Pavement (Reinforced)
122	108+80.02	11.00' Lt.	End 7" Concrete Pavement (Reinforced); Begin 11" Concrete Pavement (Reinforced); Match Existing
123	109+29.94	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
124	109+29.94	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
125	109+34.75	10.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
126	109+34.75	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
127	109+34.75	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
128	109+34.75	10.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
129	109+36.75	10.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
130	109+36.75	5.80' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
131	109+36.75	5.80' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
132	109+36.75	10.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
133	109+41.55	1.00' Rt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
134	109+41.55	1.00' Lt.	Edge of Brick Pavers on 7" Concrete Pavement; Edge of 11 Concrete Pavement (Reinforced)
135	109+52.90	29.00' Rt.	Corner Point (E.O.P.); 7" Concrete Pavement (Reinforced)
136	109+52.90	21.00' Rt.	Corner Point (E.O.P.); 7" Concrete Pavement (Reinforced)

IF THIS DRAWING IS LESS THAN 22" X 36" IT IS A REDUCED SIZE DRAWING

TRANSYSTEMS
245 N. WACO
SUITE 222
WICHITA, KANSAS 67202
MAIN: 316-303-3000
FAX: 316-462-5629

CONSULTANTS:

COMMERCE STREET & ST. FRANCIS AVENUE IMPROVEMENTS FROM WATERMAN TO KELLOGG

WICHITA, KANSAS

CITY OF WICHITA

REVISIONS:

MARK	DATE	DESCRIPTION

PROJ NO: 472-2021
SCALE: 1"=20'
DATE: 2/21/2024
DESIGNED BY: MLC
DRAWN BY: LCV
CHECKED BY: MDB

SHEET TITLE:

COMMERCE STREET GEOMETRIC LAYOUT DETAILS

SHEET NO.
63

mlroemer 2/21/2024 - 1:15:12 PM - c:\transystems\pw_local\transyscorp-pw1\mlroemer\d1254772\C-PAV-M02-503.dgn