


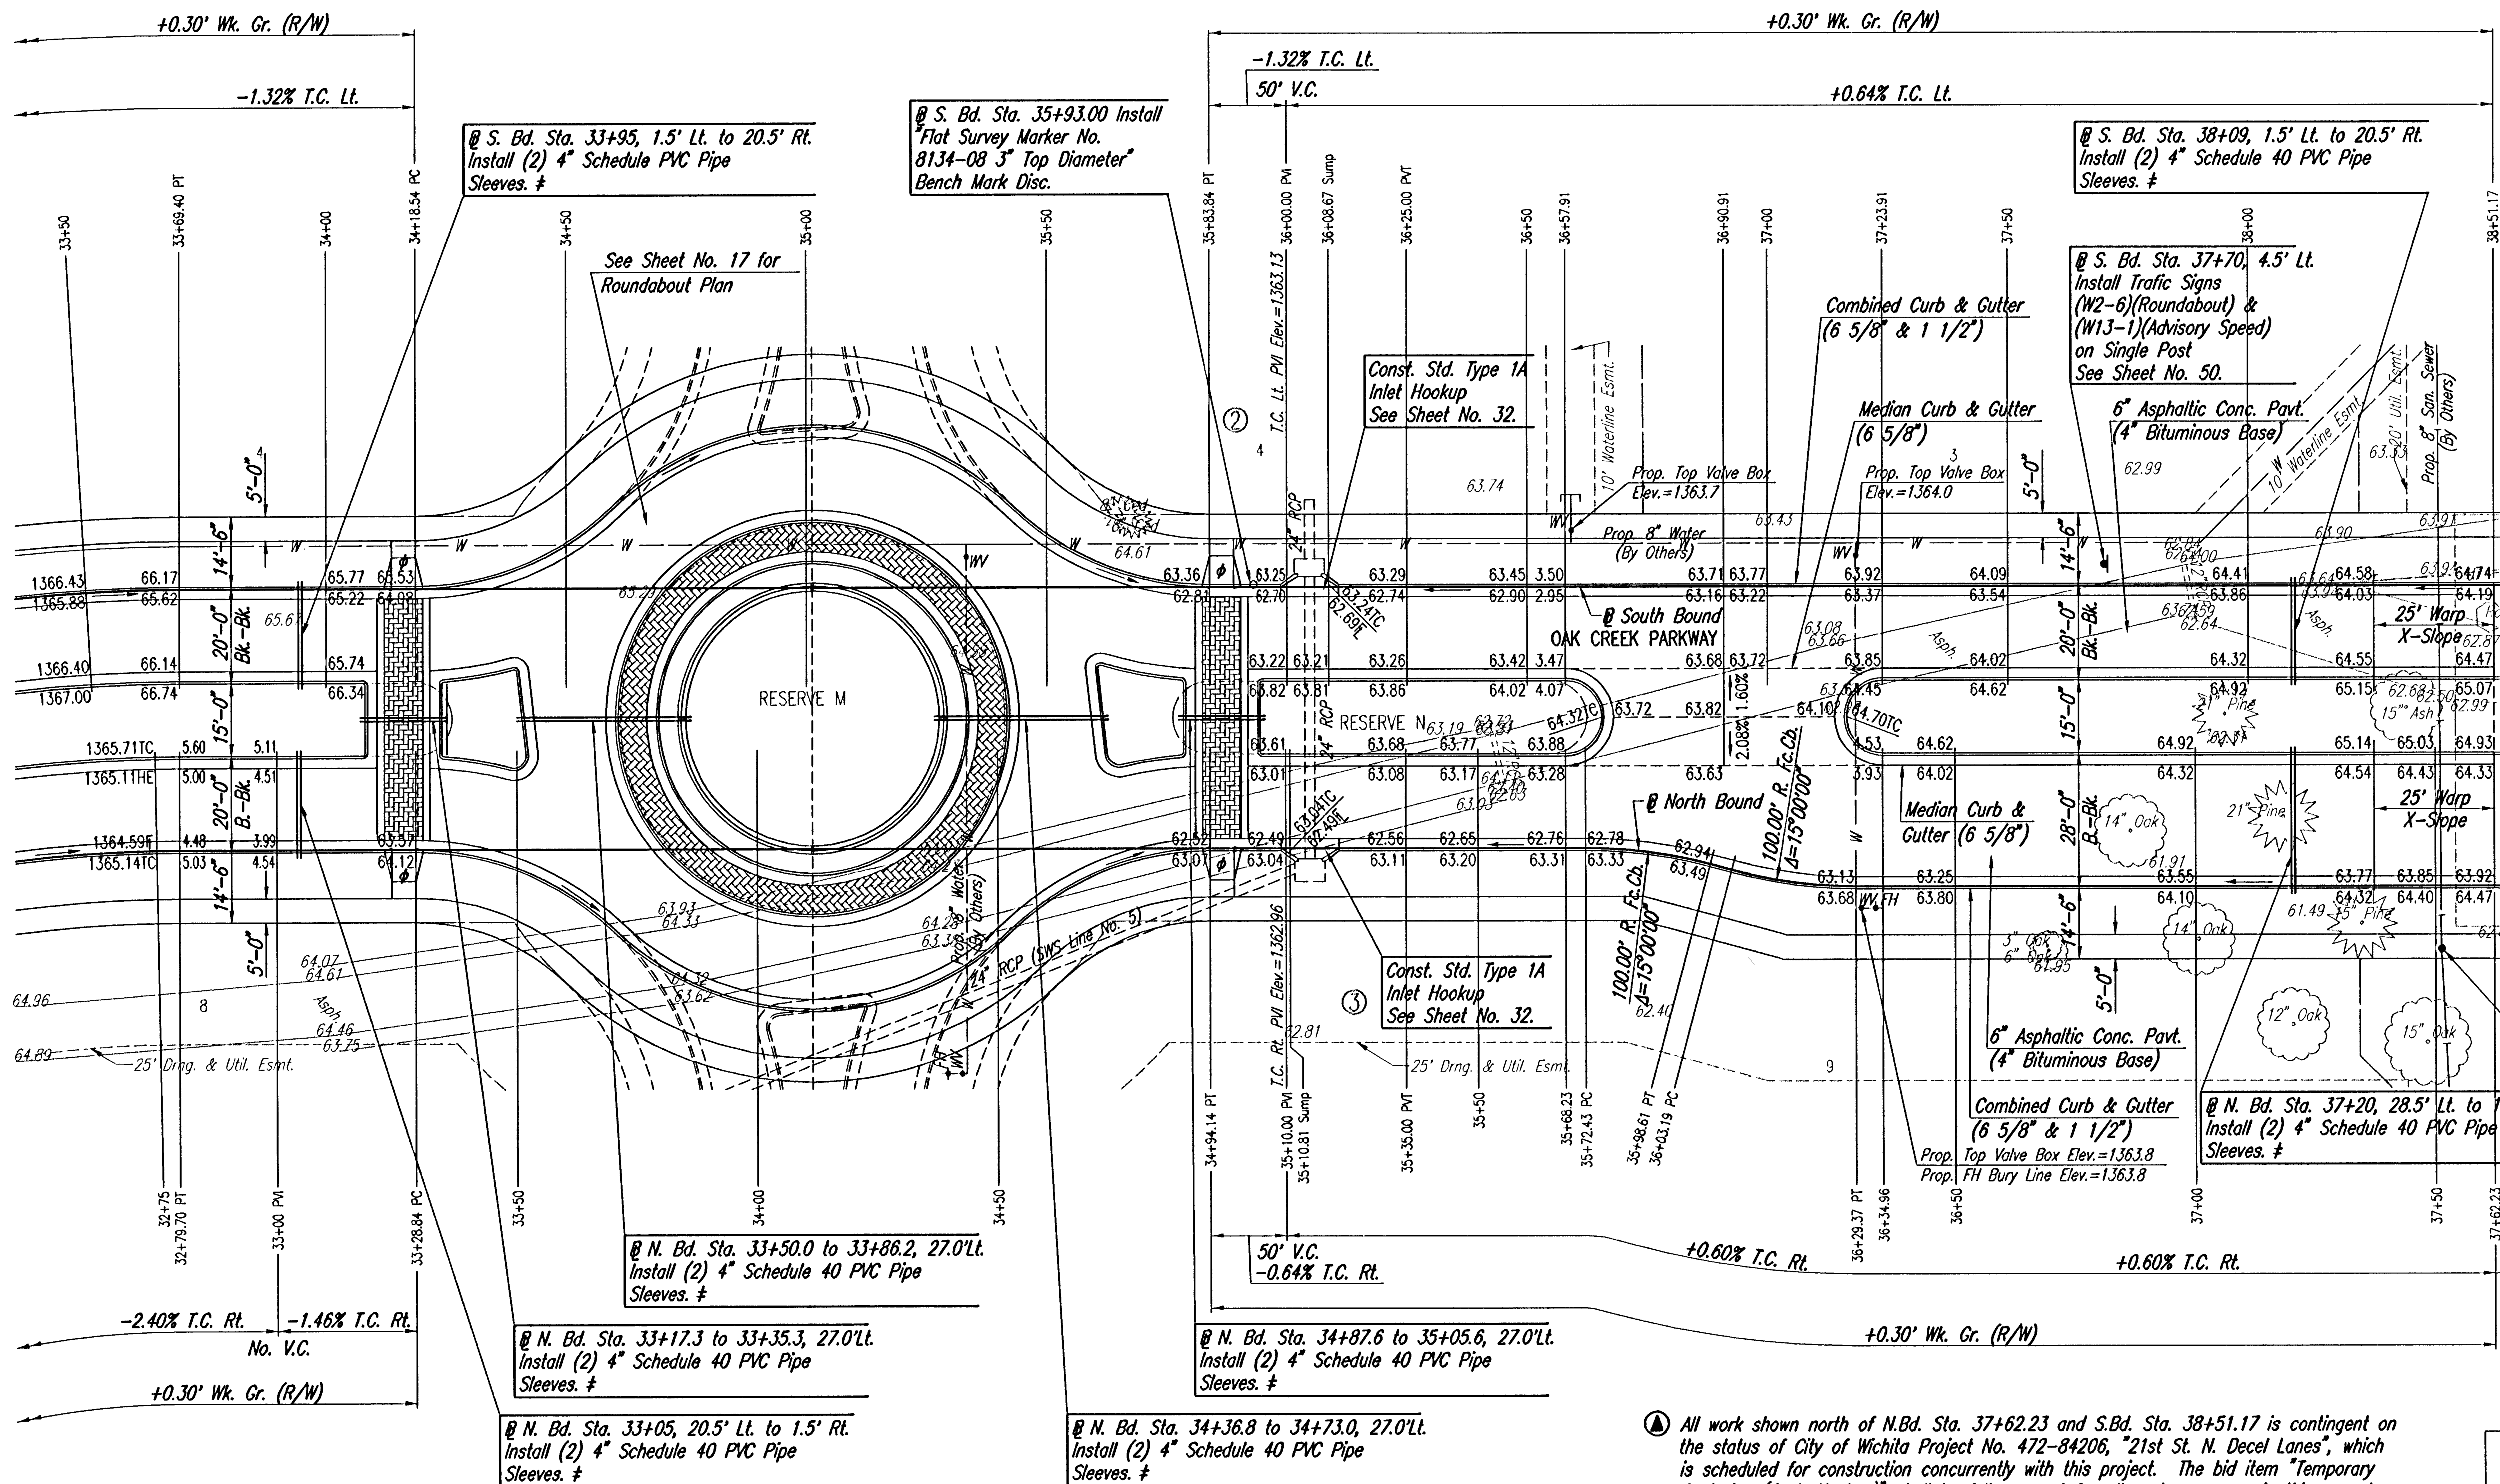

* Sleeves to be 42" below top of curb.
Each end of 4" PVC pipe sleeves shall be capped
and marked with steel "I" posts or 2" dia.
steel pipe a maximum of 12" above finished
grade. Pipe, caps, markers, and installation
thereof shall be Subsidiary to Median Comb. Curb
& Gutter (6 5/8").

Ⓐ All work shown north of N.Bd. Sta. 37+62.23 and S.Bd. Sta. 38+51.17 is contingent on
the status of City of Wichita Project No. 472-84206, "21st St. N. Decel Lanes", which
is scheduled for construction concurrently with this project. The bid item "Temporary
Surfacing (Pavt. Hookup)" shall be full payment for all work necessary in this zone to
provide a temporary pavement connection, including all excavation, compaction, clearing,
combined curb and gutter removal, asphalt paving, incidental traffic control, and all
other labor, equipment, and materials necessary to complete the work.

If, in the opinion of the Engineer, the work included in this zone is not necessary due
to adjacent construction on the decel lane project, this bid item shall be 100% underrun.

WATER VALVE BOX ELEVATIONS			
STREET	STATION	OFFSET	PROPOSED ELEVATION
OAK CREEK PARKWAY	@ S. Bd. 36+59.1	11.7' LL	1363.7
OAK CREEK PARKWAY	@ S. Bd. 37+18.3	6.3' LL	1364.0
OAK CREEK PARKWAY	@ N. Bd. 36+30.4	4.5' RL	1363.8

@ S. Bd. Sta. 38+53.2, 27.0' Lt.
Install Traffic Signs
(R4-7)(Keep Rt.)
(OM1-3)(Object Marker)
See Sheet No. 50.

@ S. Bd. Sta. 38+55, 5.0' Lt.
Install Street Name Sign
(21st St/Oak Creek Parkway)
See Sheet No. 50.


Remove 97 L.F.
Combined Curb & Gutter
Sta. 39+23.17 @ S. Bd. Oak Creek Parkway=
@ 21st Street North

6" Asphaltic Conc. Pavt.
(4" Bituminous Base) over
Compacted Subgrade (95%)
Proposed Pavement (By Others)
(C.O.W. Proj. No. 472-84206)

Sta. 38+34.23 @ N. Bd. Oak Creek Parkway=
@ 21st Street North

@ N. Bd. Sta. 37+66, 5.0' Rt.
Install Traffic Sign
(R1-1)(Stop)
See Sheet No. 50.

⌘ Construct Std. Wheelchair Ramp

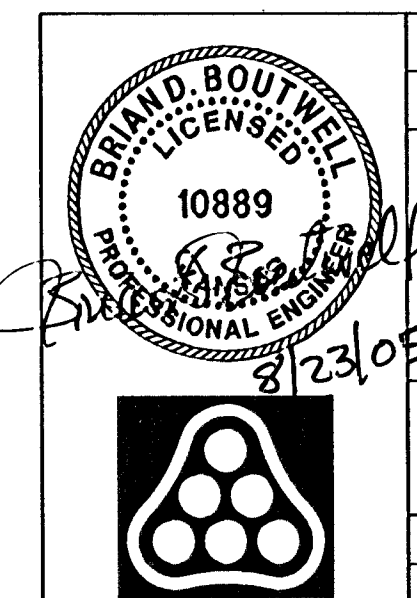

No.	Revision	By	Date
OAK CREEK - PHASE 1			
OAK CREEK PARKWAY			
@ N. Bd. Sta. 33+00 to 37+62.23 @ S. Bd. Sta. 33+50 to 38+51.17			
JAMES L. ARMOUR, P.E. - CITY ENGINEER			
CITY OF WICHITA PROJECT NO. 472-84209			
Professional Engineering Consultants, P.A.			
303 S. TOPEKA • WICHITA, KANSAS 67202			
316-262-2691 • FAX 316-262-3003			
Designed by	BDB, BLB	Job No.	35-04688-000
Drawn by	BJS	Date	October 2004
		Sheet	10 of 86