



7. Rock bedding
If ground water is found in the sewer trench, the Contractor shall be required to add a rock bedding layer as per the City of Wichita sanitary sewer installation specifications. The cost for the bedding layer shall be considered subsidiary to the pipe installation and not be bid or paid for separately.

13. All pipe backfill (excluding flowable fill) shall be compacted to 95% standard proctor density.

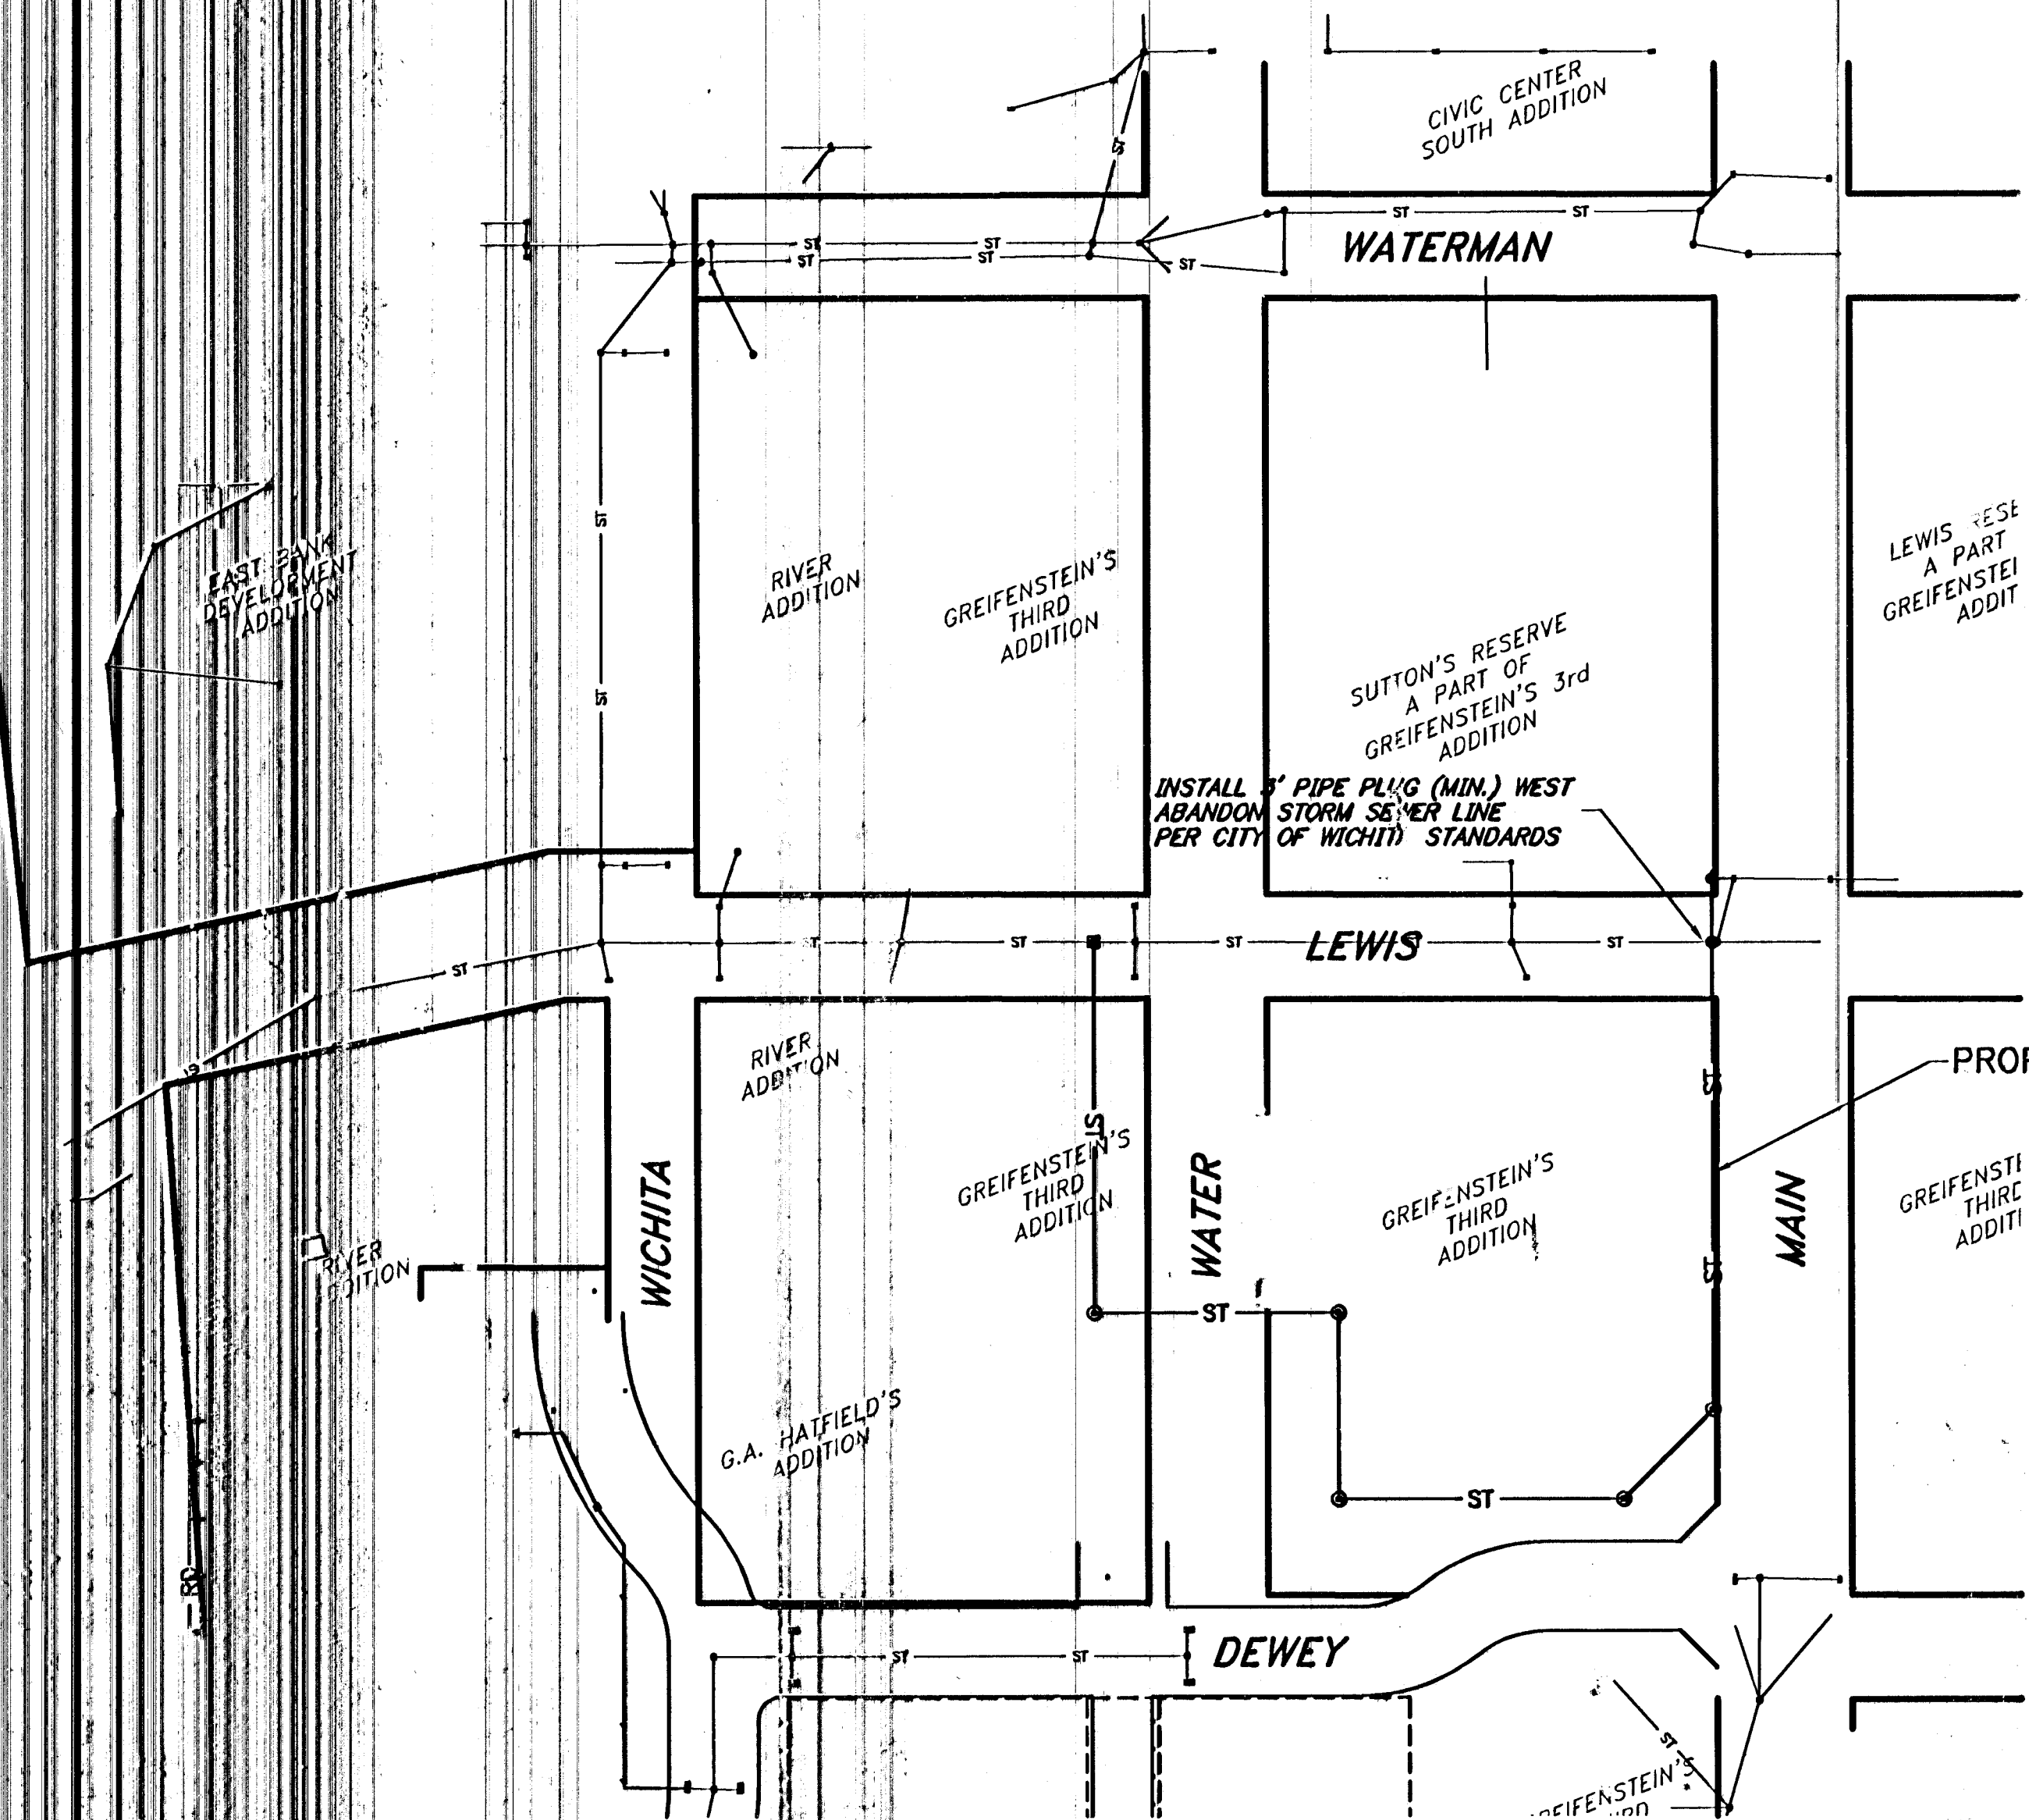

REFER TO SHEET 3
FOR BENCHMARKS
AND CONTROL DATUM.



**PUBLIC
IMPROVEMENTS
PHASE 2
PACKAGE 1**

Mack	Date:	Description	

KEY MAP & GENERAL NOTES

Job No. _____
Date **12-30-05**
Drawn **BC**
Checked **PB**

ST1.0
OF
4
Dwg. **19** of **24**