



PLAN	CHECKED	BY	DATE

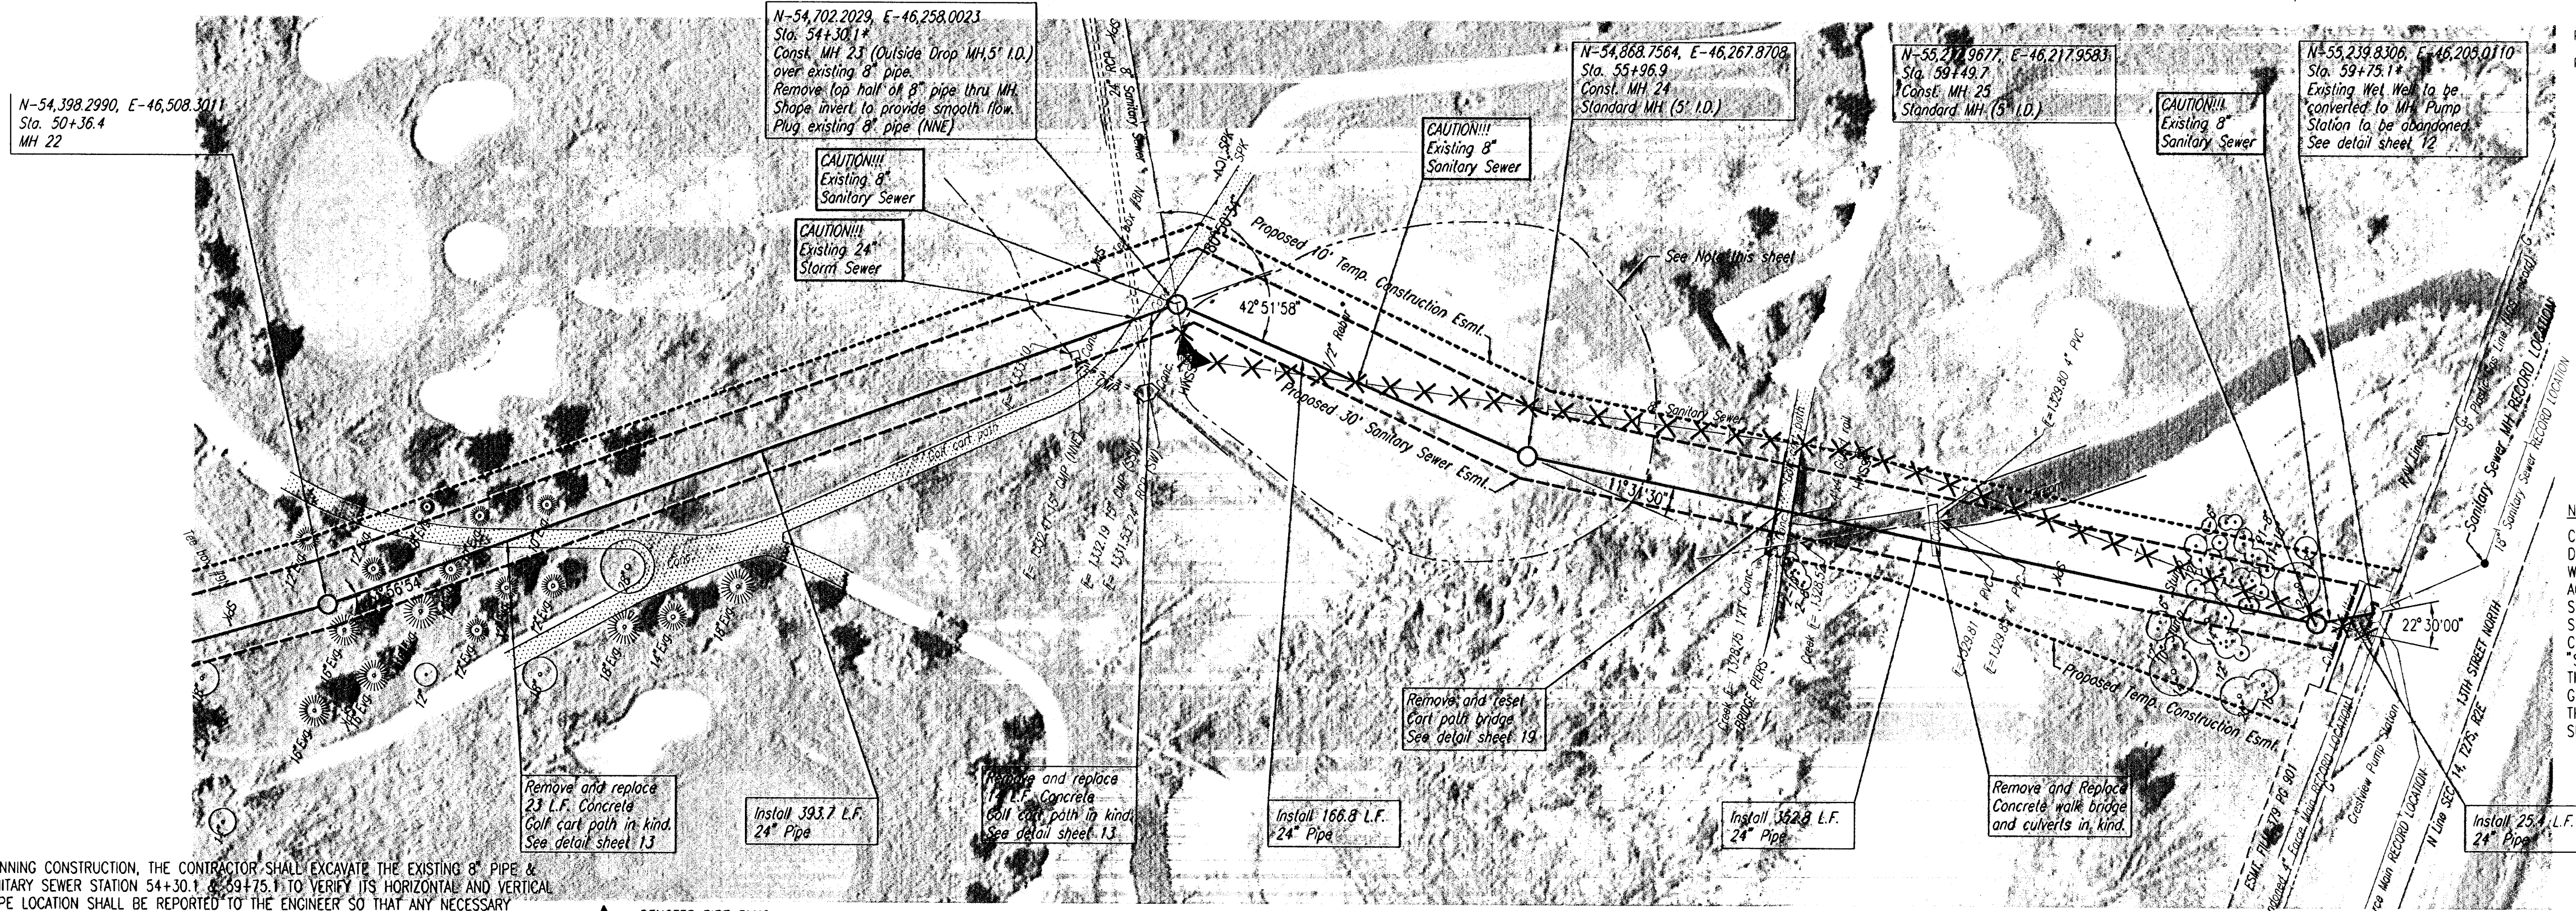

NOTE
CONTRACTOR SHALL REMOVE STOCKPILE OF POND DREDGED MATERIAL AND DISPOSE OF IN ACCORDANCE WITH GENERAL NOTE NO. 10 AND THE EASEMENT AGREEMENT (SEE SPECIAL PROVISION). CONTRACTOR SHALL GRADE AREA TO DRAIN UPON COMPLETION OF SEWER CONSTRUCTION. THIS WORK SHALL BE CONSIDERED SUBSIDIARY TO THE LUMP SUM BID FOR "SITE CLEARING".
THE CONTRACTOR SHALL PROVIDE TOP SOIL, FINAL GRADING, AND SEEDING/MULCHING/FERTILIZATION OF THE AREA. THIS WORK SHALL BE CONSIDERED SUBSIDIARY TO THE LUMP SUM BID FOR "LANDSCAPING".

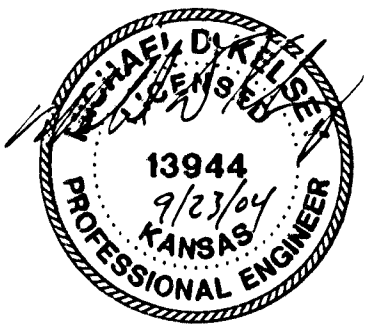


* PRIOR TO BEGINNING CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE THE EXISTING 8" PIPE & WET WELL AT SANITARY SEWER STATION 54+30.1 & 59+75.1 TO VERIFY ITS HORIZONTAL AND VERTICAL LOCATION. THE PIPE LOCATION SHALL BE REPORTED TO THE ENGINEER SO THAT ANY NECESSARY PLAN MODIFICATIONS CAN BE MADE. ANY ADDITIONAL LABOR OR MATERIALS NECESSARY TO COMPLETE THE CONNECTION SHALL BE CONSIDERED SUBSIDIARY TO THE PROJECT.

▲ = DENOTES PIPE PLUG
X = DENOTES SANITARY SEWER/MANHOLE ABANDONMENT

SANITARY SEWER LINE NO. 1

PROFILE	CHECKED	BY	DATE

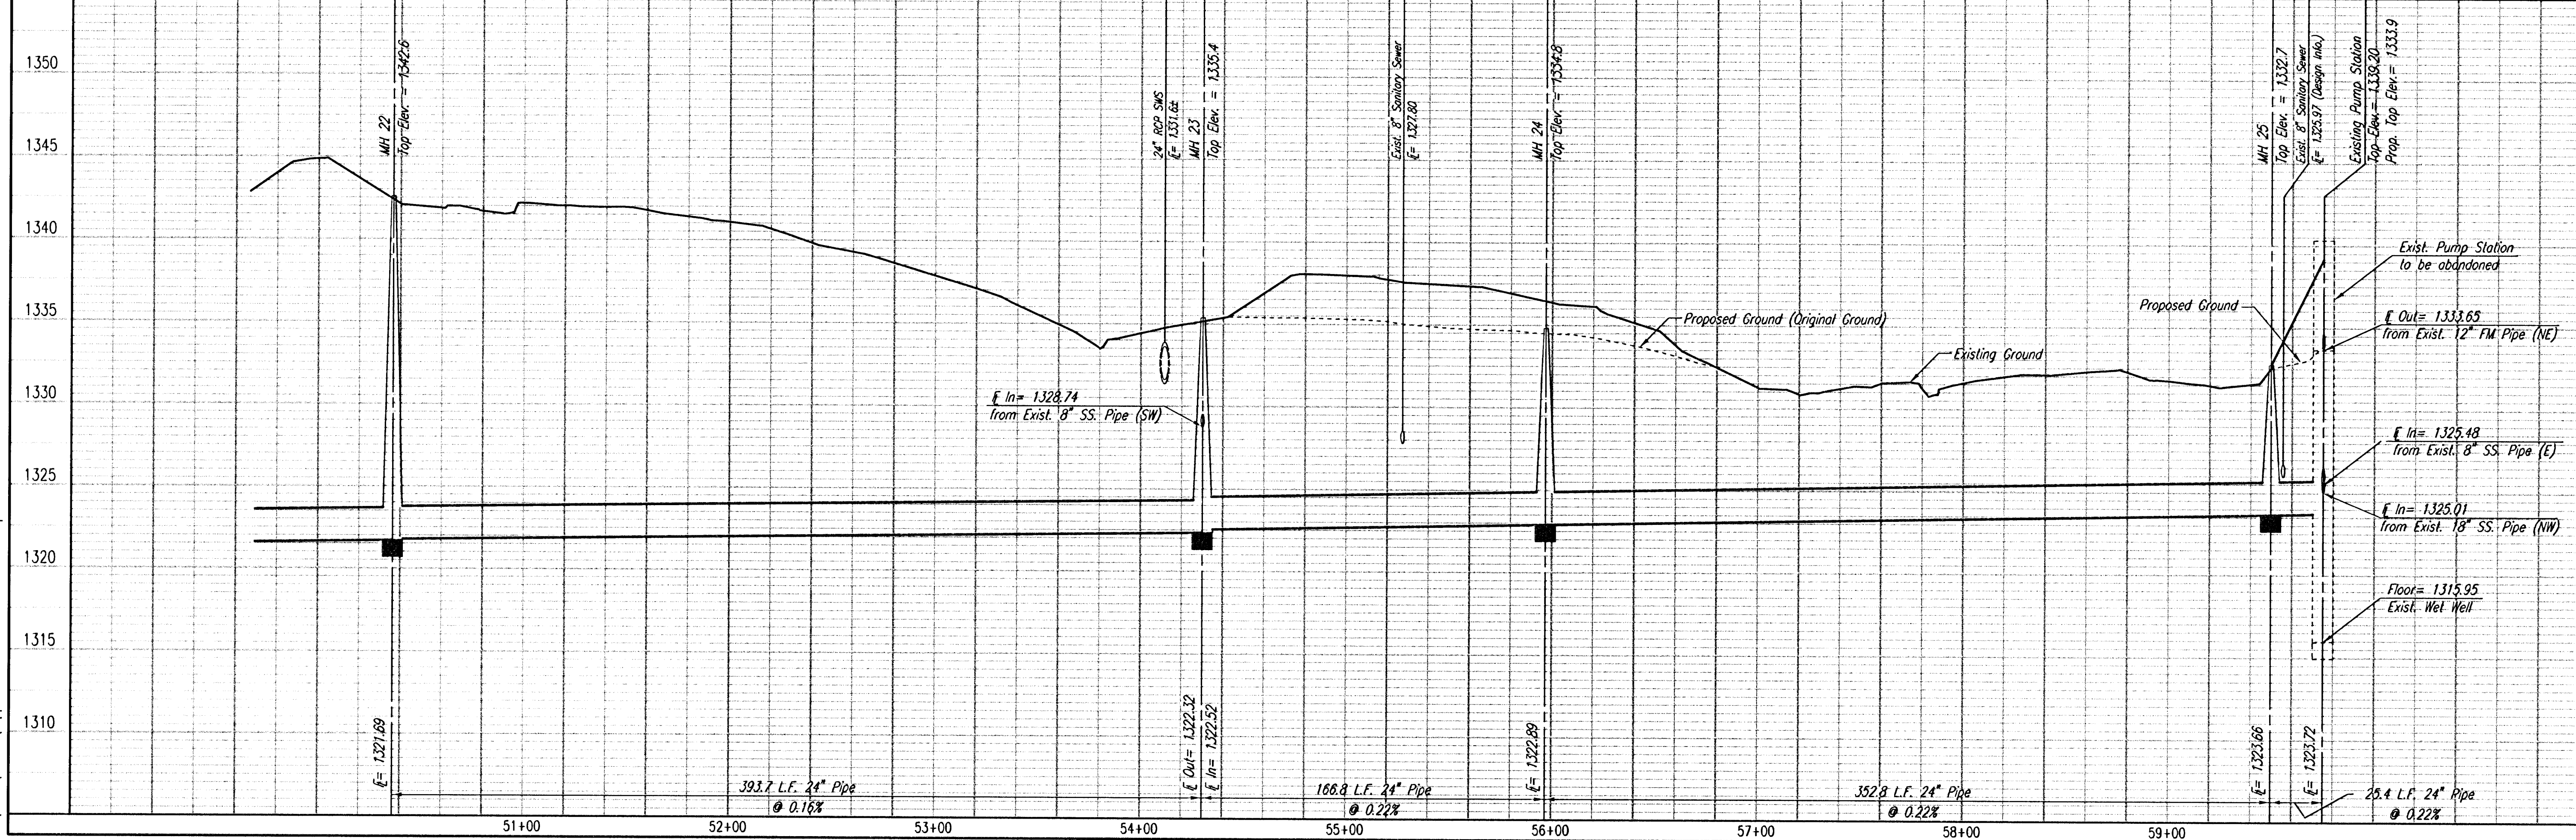

SANITARY SEWER LINE NO. 1

Professional Engineering Consultants, P.A.
303 S. TOPEKA • WICHITA, KANSAS 67202
316-262-2691 • FAX 316-262-3003

MAIN 17, FOUR MILE CREEK
CRESTVIEW SEWER - PHASE 1

Designed By: MDK
Job No.: 35-02633-3687
Date: JULY 2004