

INDUSTRIAL

AIR

CENTER

ADDITION

3

2

2

1

CONST. STD. TYPE 1-A CURB
INLET W=4'-4" L=6'-4"
CENTERED ON EXISTING RCP
CONST. INLET HOOKUP (FLUME)
COST SUBSIDIARY TO INLET
HOOKUP
TOP EL.=230.0
FL. OUT=225.53

REMOVE EX. RCP
COST SUBSIDIARY TO
SITE PREPARATION

CONST. COMBINATION CURB & GUTTER
(FULL - 6 5/8")
CONST. 6" A.C. PAVEMENT
W/6" CRUSHED ROCK ON
GEO. GRID REINF.

REMOVE GROUTED RIP RAP
SLOPE PROTECTION COST
SUBSIDIARY TO SITE
PREPARATION AND RESTORATION

REMOVE EX. CURB
TRANSITION FROM
STA.17+85.12
TO END

REMOVE EXISTING LANDSCAPE TIMBER
& LAY BACK ON OWNERS PROPERTY
COST SUBSIDIARY TO SITE PREPARATION

CONST. 8" REINF.
CONCRETE DRIVE
MATCH EXISTING
DRIVE AT R.O.W.

P.V.I
ELEV.=233.55
NO V.C.

P.V.I
ELEV.=229.86
NO V.C.

-0.50%

-1.03%

REMOVE EX. 15" RCP
COST SUBSIDIARY TO
SITE PREPARATION

MATCH EXISTING
DRIVE AT R.O.W.

CONST. 8" REINF.
CONCRETE DRIVE

REMOVE TREES AS APPROVED
BY ENGINEER. COST SUBSIDIARY
TO SITE PREPARATION AND
RESTORATION

REMOVE GROUTED RIP RAP
SLOPE PROTECTION COST
SUBSIDIARY TO SITE
PREPARATION AND RESTORATION

REMOVE EX. CURB
TRANSITION FROM
STA.17+85.12
TO END

CONST. STD. TYPE 1-A CURB
INLET W=4'-4" L=6'-4"
CENTERED ON EXISTING RCP
CONST. INLET HOOKUP (FLUME)
COST SUBSIDIARY TO INLET
HOOKUP
TOP EL.=230.0
FL. OUT=225.02

REVISED 12/31/96

COMOTARA


INDUSTRIAL

PARK

4TH

ADDITION

37TH ST. N.

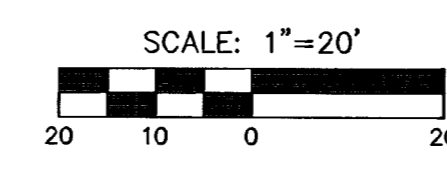

**MID-KANSAS ENGINEERING
CONSULTANTS, INC.**
411 N. WEBB ROAD
WICHITA, KS. 67206
316-684-9600

**COMOTARA INDUSTRIAL PARK
FOURTH ADDITION &
INDUSTRIAL AIR CENTER ADDITION**
PROJECT NAME

PAVING PLANS
SHEET TITLE

GJA/JPN DESIGN BY. JPN/MLW/RDP DRAWN BY. GJA/BDM CHECKED BY.
OCT. 1996 DATE. 95114_E3 JOB NO. 10 / 21 SHEET / OF

H:\CIVIL\95114\PAVE\95114_E3.Tue Dec 31 08:59:10 1996