


SAVED 2/24/2022 4:01:40 PM BY KURTIS DEKAT  
 PLOTTED 2/25/2022 1:34:10 PM BY KURTIS DEKAT  
 U:\WICHITA-CIVIL\2021\217043\007\MUNIDRAWINGS\217043-007-CU101.DWG

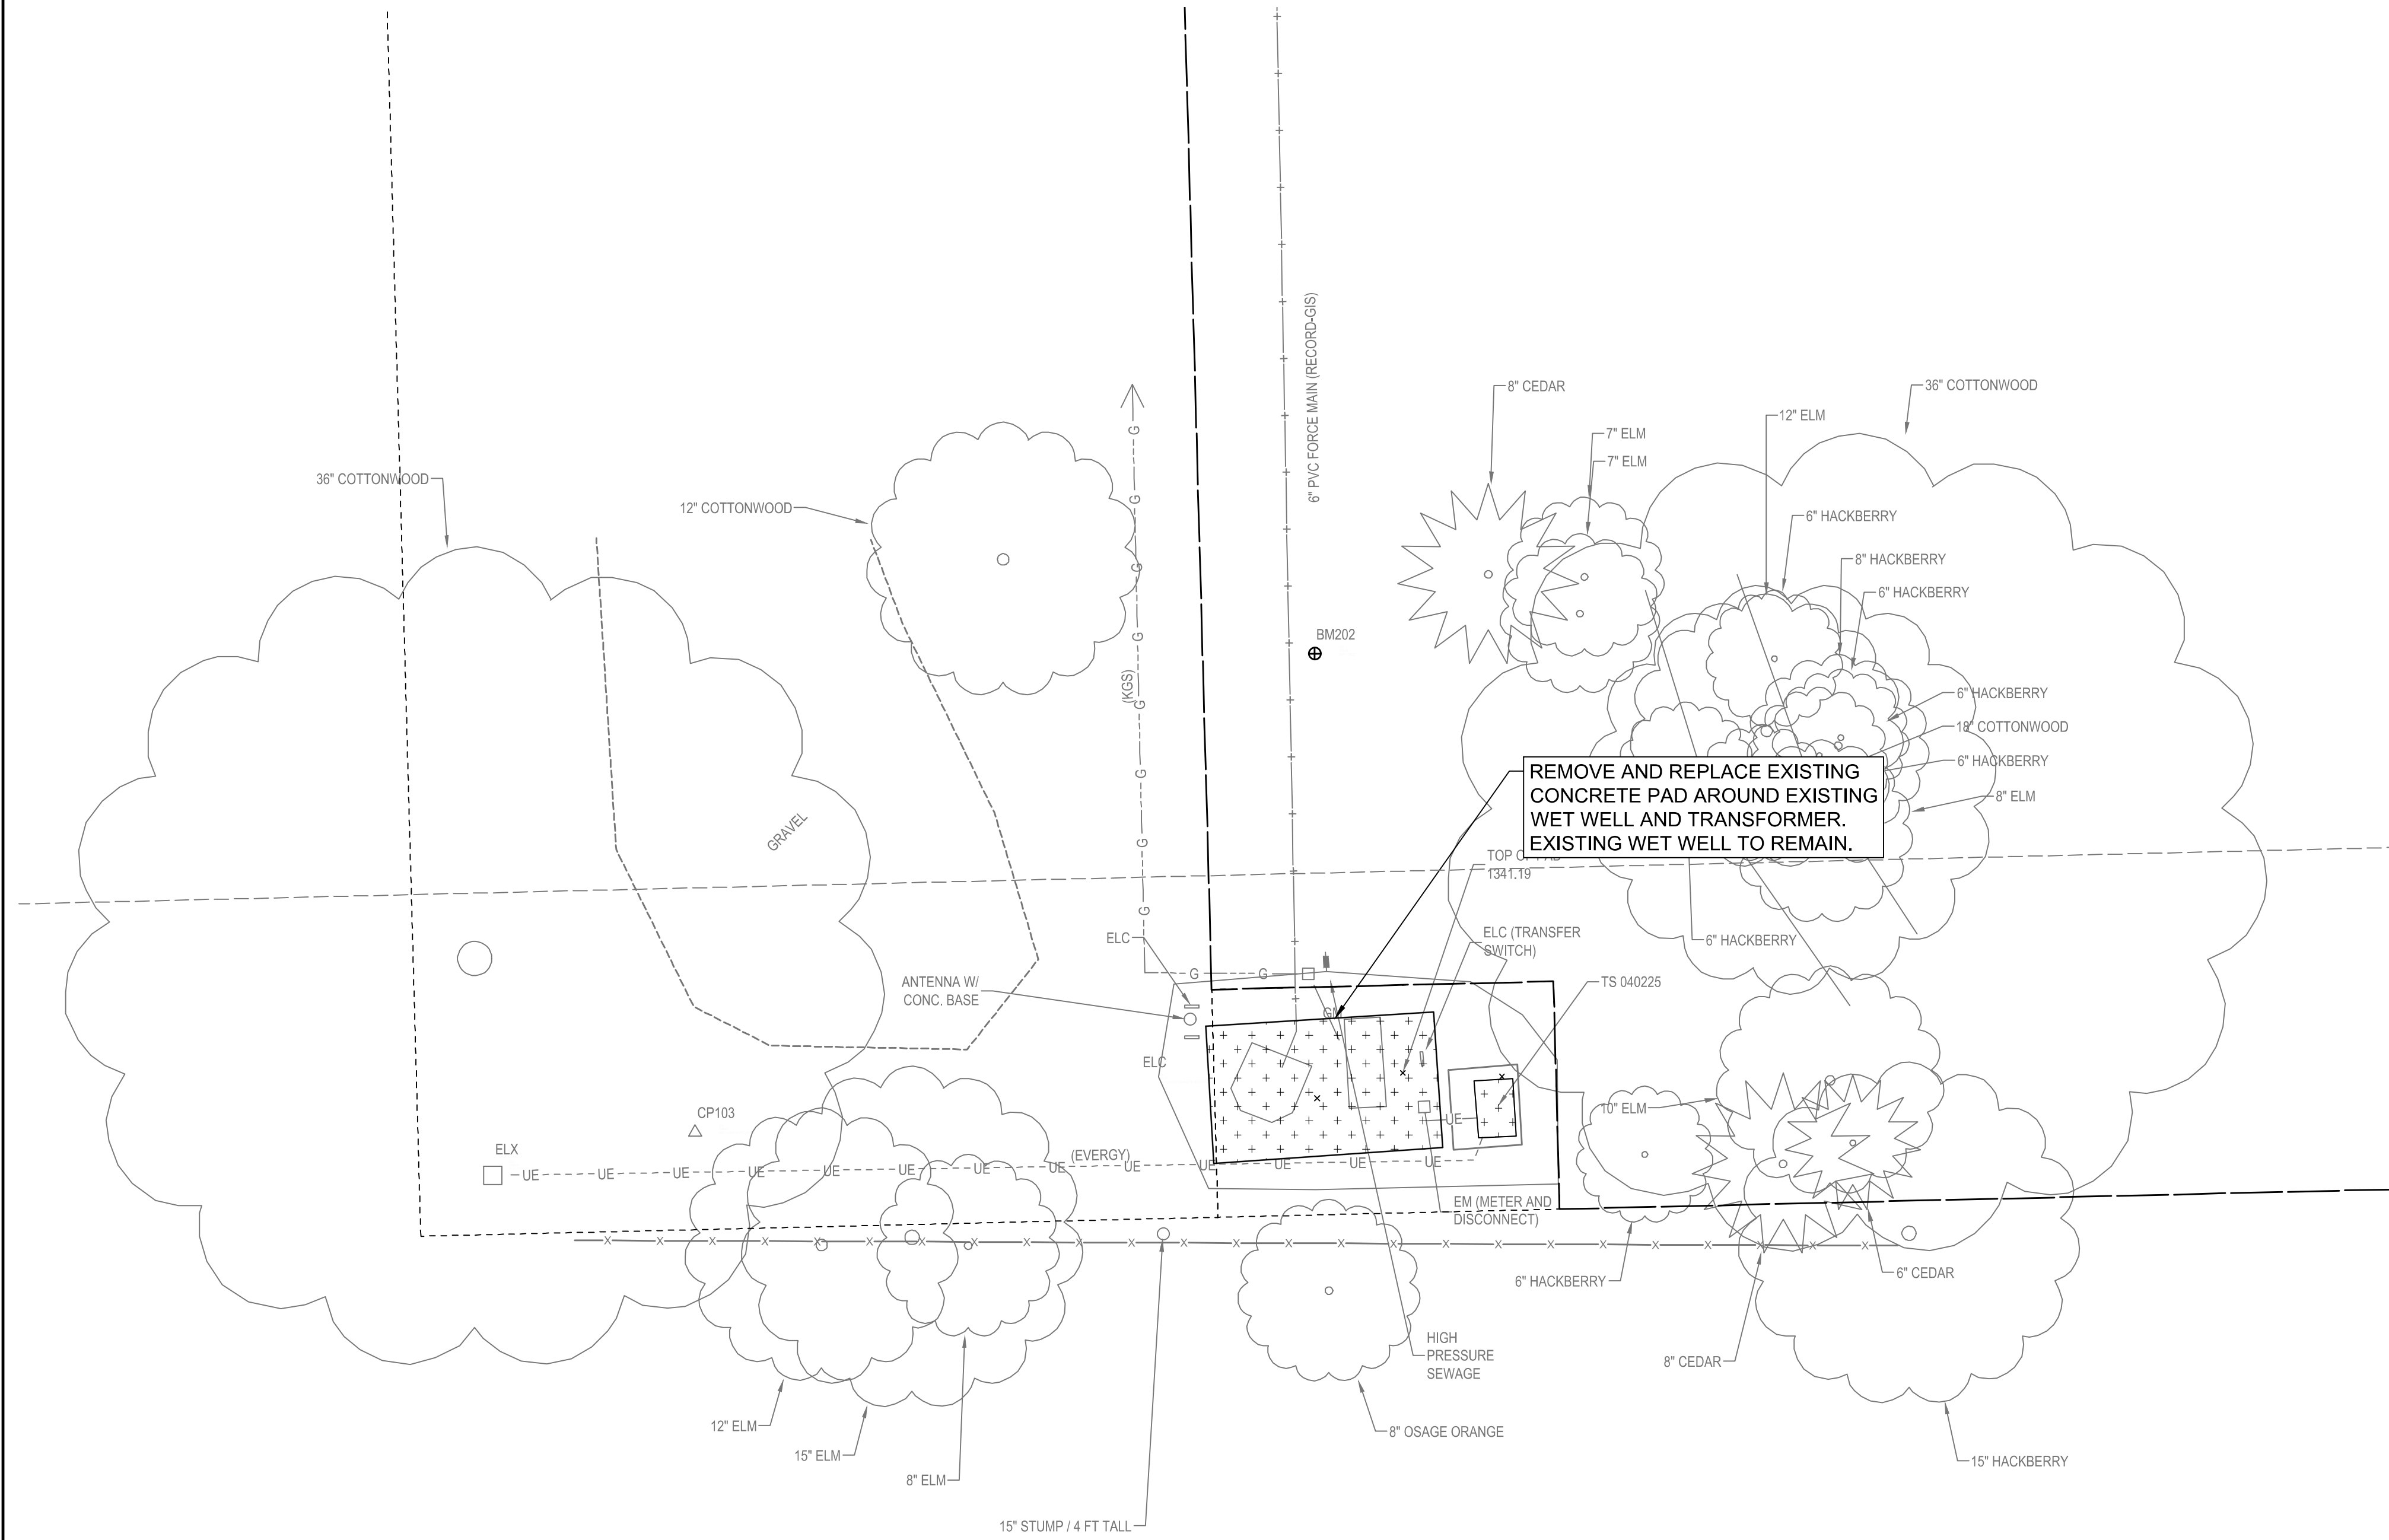

**DEMOLITION LEGEND**

+ + DENOTES CONCRETE PAVEMENT REMOVAL

**DEMOLITION NOTES**

1. PRIOR TO BID, THE CONTRACTOR SHALL PERFORM A SITE REVIEW AND ACCOUNT FOR ANY DEMOLITION ITEMS THAT MAY HAVE BEEN INADVERTENTLY NOT SHOWN ON THIS DRAWING. ALL DEMOLITION IS SUBSIDIARY TO THE PROJECT.
2. THE CONTRACTOR IS RESPONSIBLE FOR ALL COSTS TO REPAIR DAMAGE TO EXISTING UTILITY SERVICE LINES OR MAIN LINES, BUILDINGS, PAVEMENT ON OR ADJACENT TO THE SITE THAT ARE TO REMAIN IN SERVICE AND ARE NOT CALLED TO BE DEMOLISHED ON THIS PLAN, INCLUDING SERVICE LINES THAT ARE NOT SHOWN ON THE SITE SURVEY.
3. ALL EXISTING UTILITIES WITHIN THE PROPERTY LIMITS SHALL BE REMOVED AND TERMINATED PER THE UTILITY COMPANY REQUIREMENTS. THE CONTRACTOR IS RESPONSIBLE FOR COORDINATION OF THIS WORK AND ANY ASSOCIATED FEES.
4. THE CONTRACTOR IS RESPONSIBLE FOR DEMOLITION PERMIT FEES, DISPOSAL FEES, ANY OTHER FEES ASSOCIATED WITH ANY DEMOLITION ITEMS.
5. REFERENCE THE GEOTECHNICAL REPORT FOR SUBGRADE PREPARATION PROCEDURES.
6. REFERENCE CU002 FOR CIVIL GENERAL NOTES.
7. SURVEY DOES NOT INCLUDE UNDERGROUND STRUCTURES OR FOUNDATIONS FROM PREVIOUS SITE CONSTRUCTION.
8. IF CONTAMINATED MATERIAL IS ENCOUNTERED, THE CONTRACTOR SHALL NOTIFY KDHE AND FOLLOW THE PROCEDURES FOR HANDLING AND DISPOSAL OF THE CONTAMINATED MATERIALS.

REMOVE AND REPLACE EXISTING CONCRETE PAD AROUND EXISTING WET WELL AND TRANSFORMER. EXISTING WET WELL TO REMAIN.



SANITARY SEWER IMPROVEMENTS

LIFT STATION NO. 16

AT  
 POPLAR STREET,  
 SOUTH OF E. 37TH STREET N

GARY JANZEN, P.E. - CITY ENGINEER  
 CITY OF WICHITA PROJECT NO. 468-2020-019216 S0013

Issue:		

JOB NO.	35-217043-007-0042
DATE	NOVEMBER 2021
PM	RWG
DESIGNED BY	RWG
DRAWN BY	KTD
CHECKED BY	TBK

DEMOLITION PLAN

CU101