

PAVING & INCIDENTAL DRAINAGE PLANS FOR
COURTYARDS AT THE MOORINGS
PART C

©2024
MKEC Engineering
All Rights Reserved
www.mkec.com
These drawings and their contents, including, but not limited to, all concepts, designs, & ideas are the exclusive property of MKEC Engineering (MKEC), and may not be used or reproduced in any way without the express consent of MKEC.

PAVING PLAN 1

PROJECT NO. 472-2022-085820c

DATE JULY 2024

SCALE 1" = 20'

DESIGNED DFL DRAWN JWC CHECKED SPE


NO.	REVISION	DATE

0 ISSUED FOR CONSTRUCTION 07/30/24

SHEET NO.

SIDEWALK POINTS				
Point #	Northing	Easting	Desc.	Elev.
600	1714714.58	1637348.29	END	1331.12
601	1714714.06	1637298.28	10+50.00	1331.00
602	1714713.50	1637248.30	11+00.00	1330.95
603	1714712.94	1637198.28	11+50.00	1330.71
604	1714712.44	1637152.90	PC: 11+95.39	1330.73
605	1714712.09	1637148.31	12+00.00	1330.79
606	1714677.85	1637117.60	12+50.00	1331.32
607	1714641.02	1637153.70	PT: 13+07.59	1330.73
608	1714641.41	1637188.79	PC: 13+42.68	1330.37
609	1714646.67	1637219.33	PT: 13+73.81	1330.05
610	1714654.10	1637240.99	PC: 13+96.70	1329.94
611	1714659.64	1637273.10	PT: 14+29.42	1329.93
612	1714659.86	1637293.69	14+50.00	1330.09
613	1714660.42	1637343.66	15+00.00	1330.41
614	1714660.70	1637368.87	END	1330.78
615	1714715.30	1637410.05	END	1331.00
616	1714715.85	1637460.02	10+50.00	1331.50
617	1714716.41	1637510.01	11+00.00	1331.80
618	1714716.96	1637560.01	11+50.00	1332.10
619	1714717.52	1637609.99	12+00.00	1332.06
620	1714718.08	1637660.00	12+50.00	1331.94
621	1714718.47	1637695.19	END	1331.88
622	1714660.83	1637430.96	END	1330.65
623	1714661.39	1637480.97	10+50.00	1330.05
624	1714661.94	1637530.96	11+00.00	1329.73
625	1714662.44	1637575.34	PC: 11+44.38	1330.11
626	1714657.91	1637590.76	PRC: 11+60.70	1330.28
627	1714652.56	1637608.98	PT: 11+79.97	1330.48
628	1714652.75	1637626.00	PC: 11+96.99	1330.50
629	1714652.78	1637629.10	12+00.00	1330.47
630	1714648.96	1637640.24	PRC: 12+11.91	1330.43
631	1714644.48	1637657.08	PT: 12+29.55	1330.34
632	1714644.61	1637669.55	PC: 12+42.02	1330.40
633	1714643.55	1637677.43	12+50.00	1330.52
634	1714639.77	1637685.44	PRC: 12+58.90	1330.67
635	1714634.05	1637704.23	PT: 12+78.84	1331.00
636	1714634.23	1637720.52	END	1331.26

REPLACE CURB & GUTTER, ASPHALT PAVEMENT, & SIDEWALK IN LIKE KIND. MATCH EXISTING GRADES.

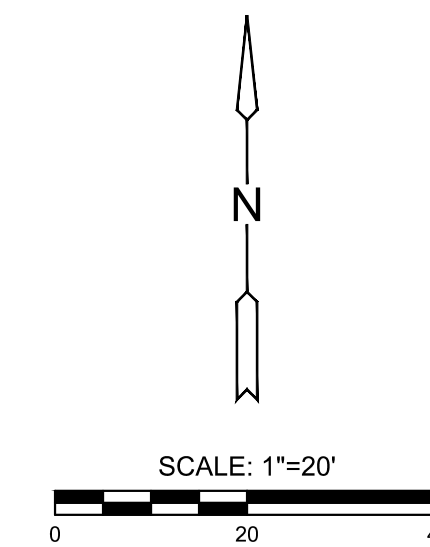

- NOTES:**
- CONTRACTOR SHALL INSTALL SIDEWALK FORMS MIN. 1 WEEK PRIOR TO CASTING CONCRETE SIDEWALK.
 - CONTRACTOR SHALL ACQUIRE MKEC'S LANDSCAPE ARCHITECT WRITTEN APPROVAL OF FORMWORK PRIOR TO SIDEWALK INSTALLATION.
 - CONTRACTOR SHALL GIVE MKEC'S REPRESENTATIVE 2 DAYS NOTICE PRIOR TO INSTALLATION OF SIDEWALK FORMS.

PLOTTED: Tuesday, July 30, 2024 @ 11:47AM

J:\PROJECTS\2021\10\10427_PERFECTION_COURTYARDS AT MOORINGS\DWG\210427 CAD\SHS\105 CIVIL\PAVPH12\427-05-500-PPH1_REV.DWG

