


Pinecrest Avenue

N.L. 2nd Street North To N.L. Lot 5, University Gardens 2nd Addition

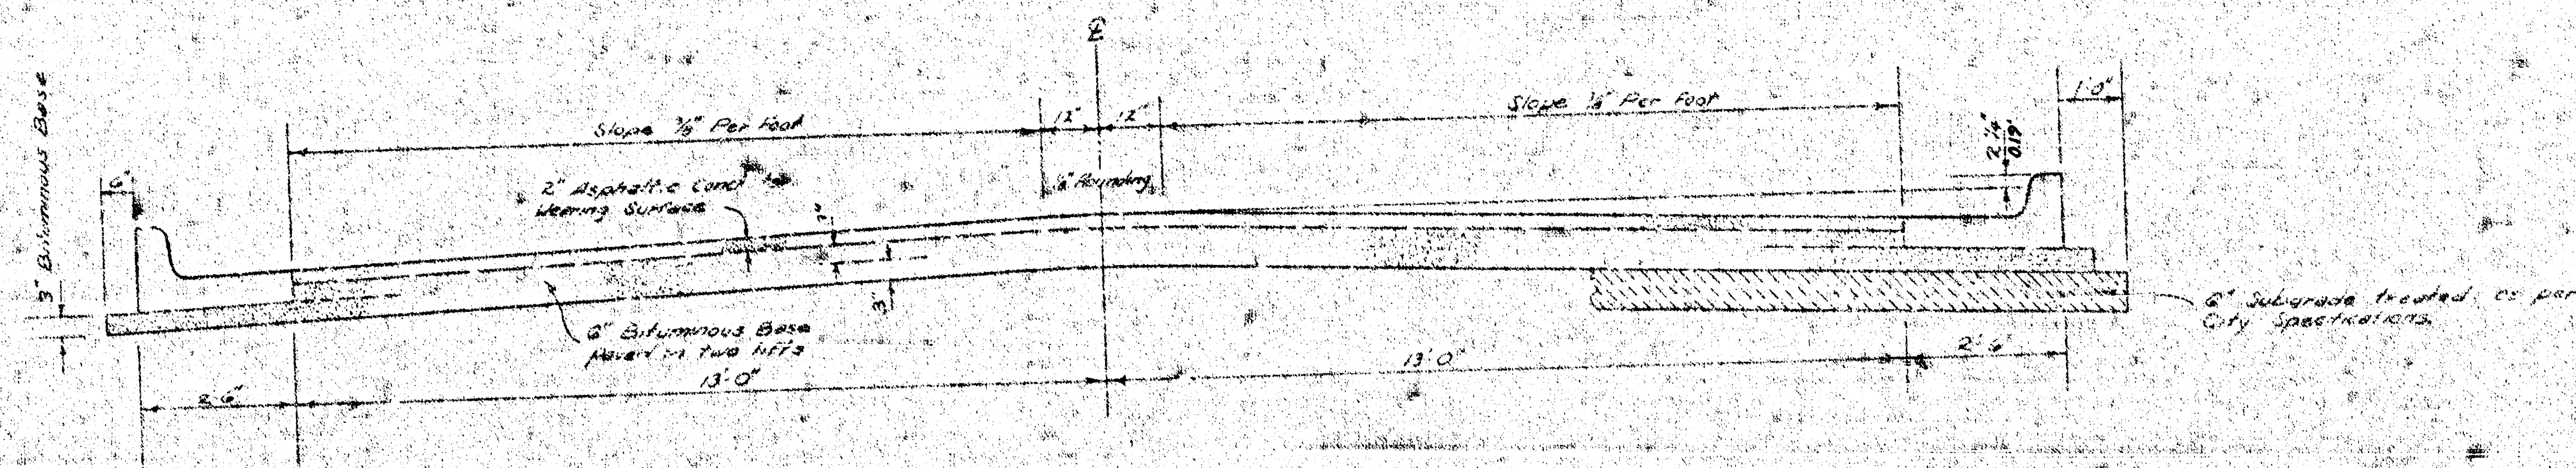


TYPICAL SECTION

3" ASPHALTIC CONCRETE PAVEMENT WITH BITUMINOUS BASE

A TACK COAT OF EMULSIFIED ASPHALT (SS-1H) SHALL BE APPLIED AT AN APPROXIMATE RATE OF 0.05 GALLONS PER SQ. YD. BETWEEN LIFTS OF ASPHALTIC MATERIALS WHEN ORDERED BY THE ENGINEER. TACK COAT WILL NOT BE PAID FOR DIRECTLY AND SHALL BE CONSIDERED AS SUBSIDIARY TO PRICE BID FOR ASPHALTIC PAVEMENT. BITUMINOUS BASE AND ASPHALTIC CONCRETE WEARING SURFACE SHALL BE PLACED WITH A LAYDOWN MACHINE HAVING AUTOMATIC CONTROLS FOR CROWN AND GRADE. CONSTRUCTION JOINTS IN EACH LIFT SHALL BE STAGGERED A MINIMUM DISTANCE OF 1' WITH JOINTS IN PRECEDING LIFTS AND SUCH THAT A JOINT WILL BE CONSTRUCTED ON THE PAVEMENT CENTERLINE IN THE TOP LIFT.


The A.C. pavement between the Comb. Curb & Gutter shall be paid as Sec. 10. 3" A.C. Pavement (6" Bituminous Base). The Bituminous Base under the Comb. Curb & Gutter shall be paid as Sec. 10. 3" Bituminous Base.

DETAIL OF TRANSVERSE CONSTRUCTION JOINTS

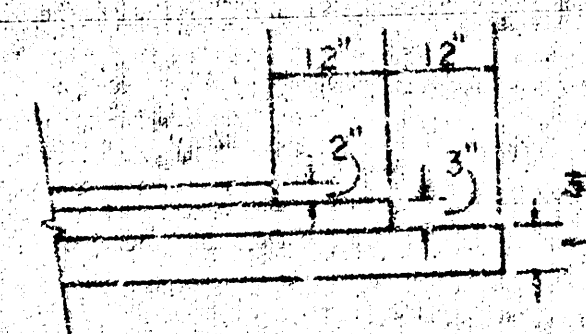


TRANSVERSE CONSTRUCTION JOINTS SHALL BE CONSTRUCTED IN FLEXIBLE BASE PAVEMENTS AT LOCATIONS WHERE PAVEMENT TEMPORARILY ENDS TO FACILITATE FUTURE PAVEMENT CONSTRUCTION AS SHOWN BY DETAIL. THE COST OF CONSTRUCTING THE TRANSVERSE CONSTRUCTION JOINTS SHALL NOT BE MEASURED OR PAID FOR DIRECTLY BUT SHALL BE INCLUDED IN THE BID PRICE FOR SQUARE YARDS OF ASPHALTIC CONCRETE PAVEMENT.

COMBINED CURB & GUTTER

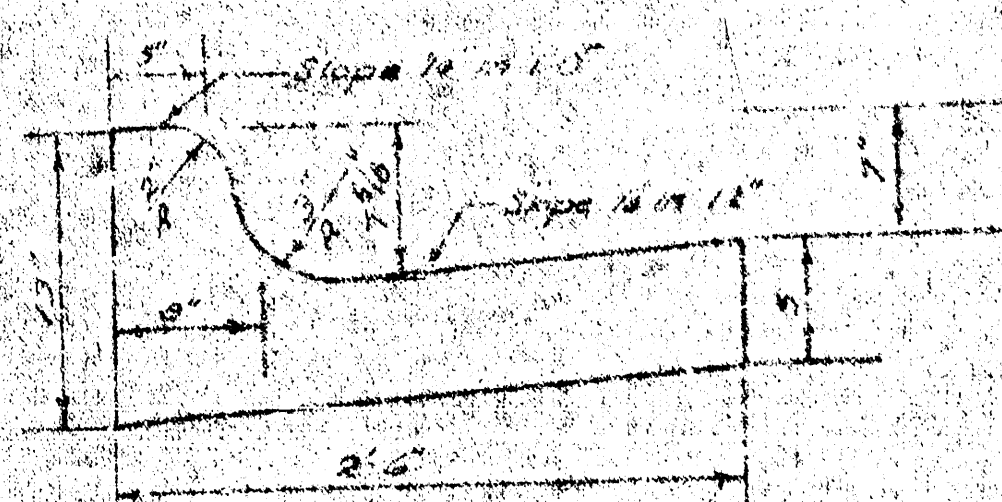

ROLL TYPE CURB & GUTTER

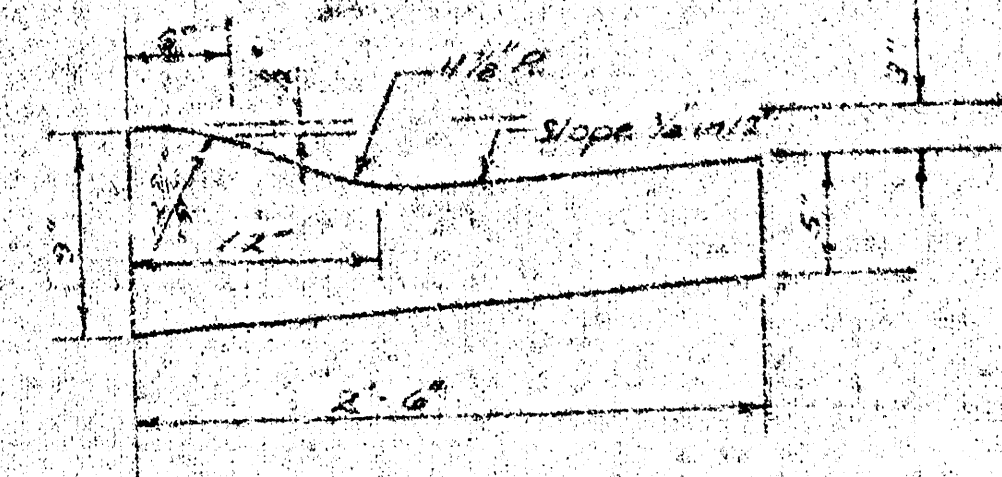

CITY OF WICHITA, KANSAS

DEPARTMENT OF PUBLIC WORKS — ENGINEERING


Dean Sellers, Acting CITY ENGINEER

DATE: _____ PROJ. NO. 472 76 245 80884 000 000 001
Sheet 1 of 6


Baseline is Ten Feet East Of Center Of Pinecrest Avenue.

No More Than 7-24' Drives Are To Be Constructed On This Project

B.M. 220.60 "R" SW Cor Of Conc Walk At SW Cor Bldg 5210 E 21st St N.
B.M. 217.82 Oliver 21st St N, City Std, 33' W & 42' N Of Centerline Both.

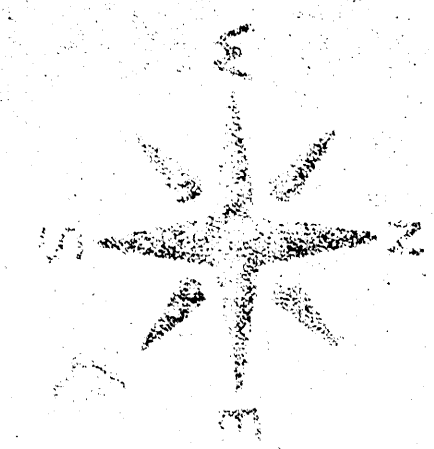

Scale 1"=20'

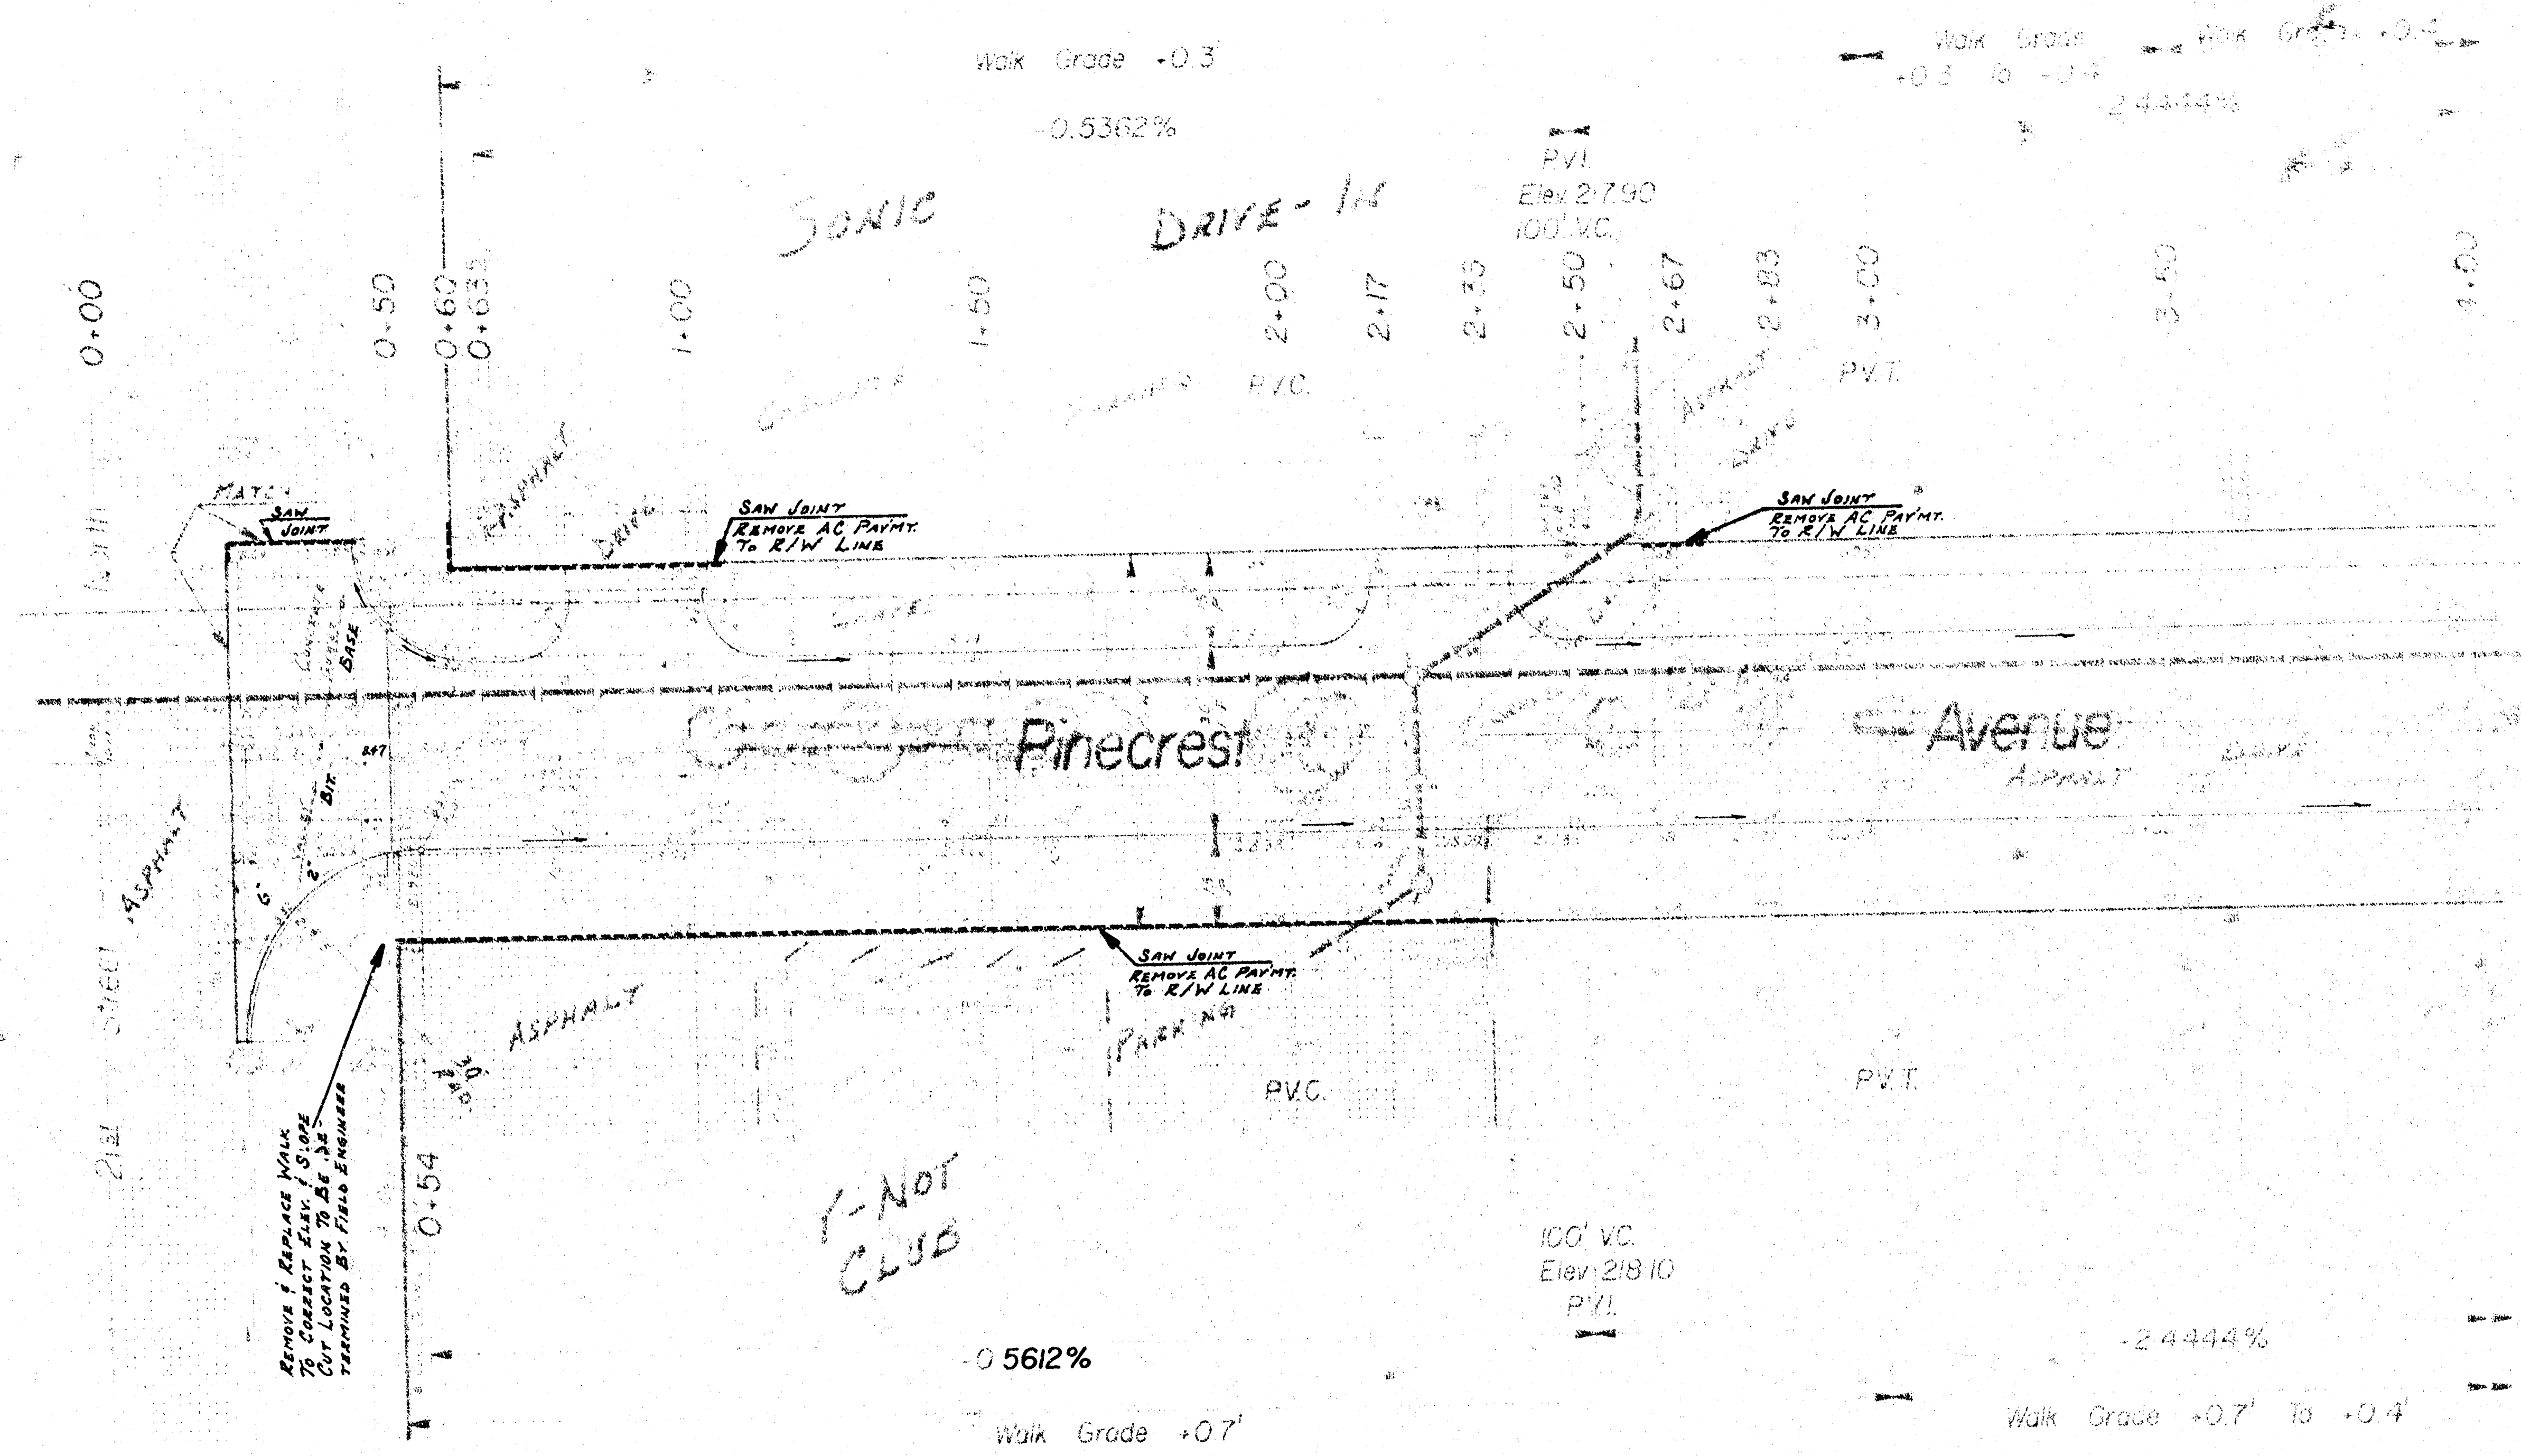

NOTE: PAVING CONTRACTOR TO CONTACT PROPERTY OWNERS ABOUT REMOVING AND REPLACING ASPHALT SURFACE BEHIND PROPERTY LINE TO MATCH NEW DRIVE APPROACH CONSTRUCTION. THIS WORK SHALL NOT BE CONSIDERED A PART OF THIS PROJECT.

NOTE: ALL TREES ARE TO BE REMOVED EXCEPT THOSE ANY TREE WHICH IN THE OPINION OF THE ENGINEER CAN BE SAVED, SHALL BE SAVED.

INDICATES REMOVAL
INDICATES REMOVE AND REPLACE

Earthwork City

Excavation	66.8 Cu Yds.
+10%	6.7 Cu Yds.
TOTAL	73.5 Cu Yds.

Earthwork Property


Excavation	175.1 Cu Yds.
+10%	17.5 Cu Yds.
TOTAL	192.6 Cu Yds.

Compacted Fill	37 Cu Yds.
+10%	4.1 Cu Yds.
TOTAL	41 Cu Yds.

MANIPULATION 2541.4 Sq. Yds.


Pinecrest Avenue
N.L. 21st Street North To
N.L. Lot 5, Univ. Gard. 2nd
30' F-F With Comb. Co. & Gr.
City Of Wichita, Kansas
Dean Sellers, Engineer
Proj. No. 472 76 245 60394 100 000 001
Date 11/1/66
Sheet 6

11/1/66
TYPE C, D, E, F, G, H, I, J, K, L, M, N, O, P, Q, R, S, T, U, V, W, X, Y, Z
THAT ARE NOT LISTED IN THE CITY OF WICHITA, KANSAS
11/1/66
CITY OF WICHITA, KANSAS
11/1/66
CITY OF WICHITA, KANSAS

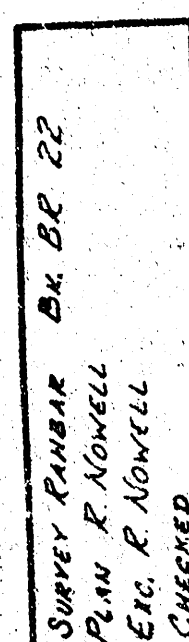

3


50

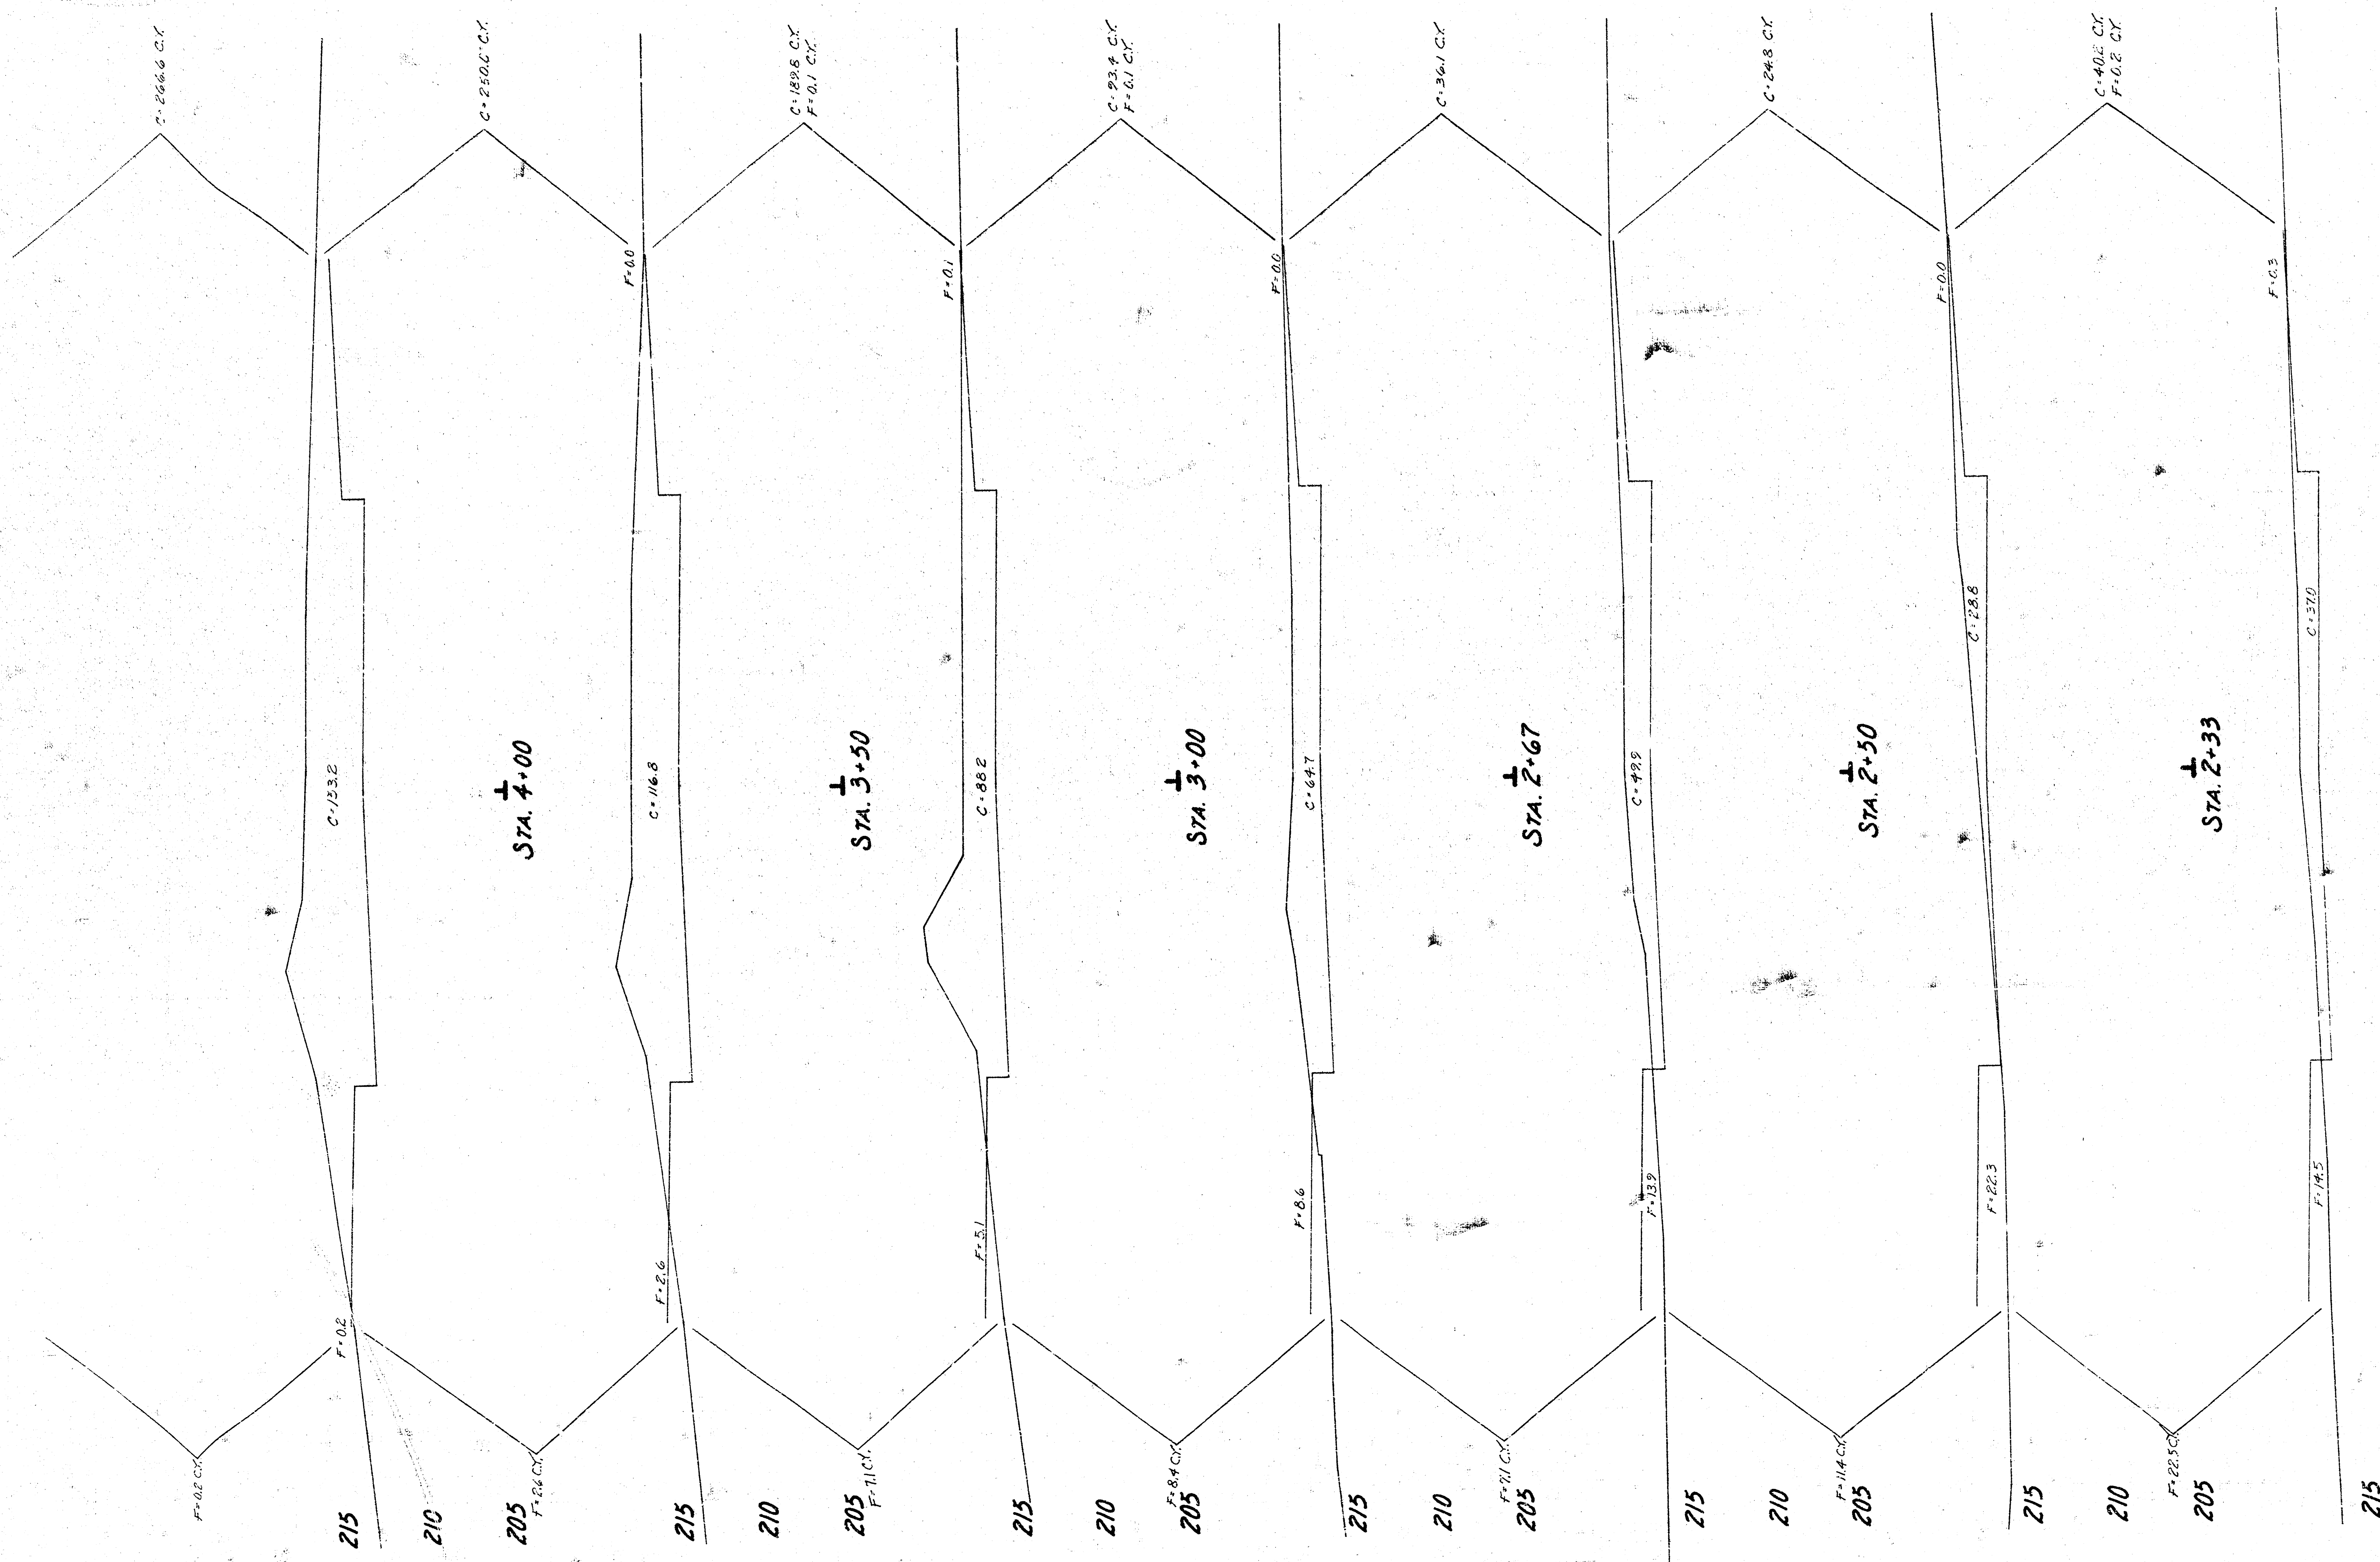

215
 210
 205
 40 35 30 25 20 15 10 5 0 5 10 15 20 25 30 35 40

STA. 2+00

PINECREST AVENUE
 472 76 245 8088 + 000 000 001

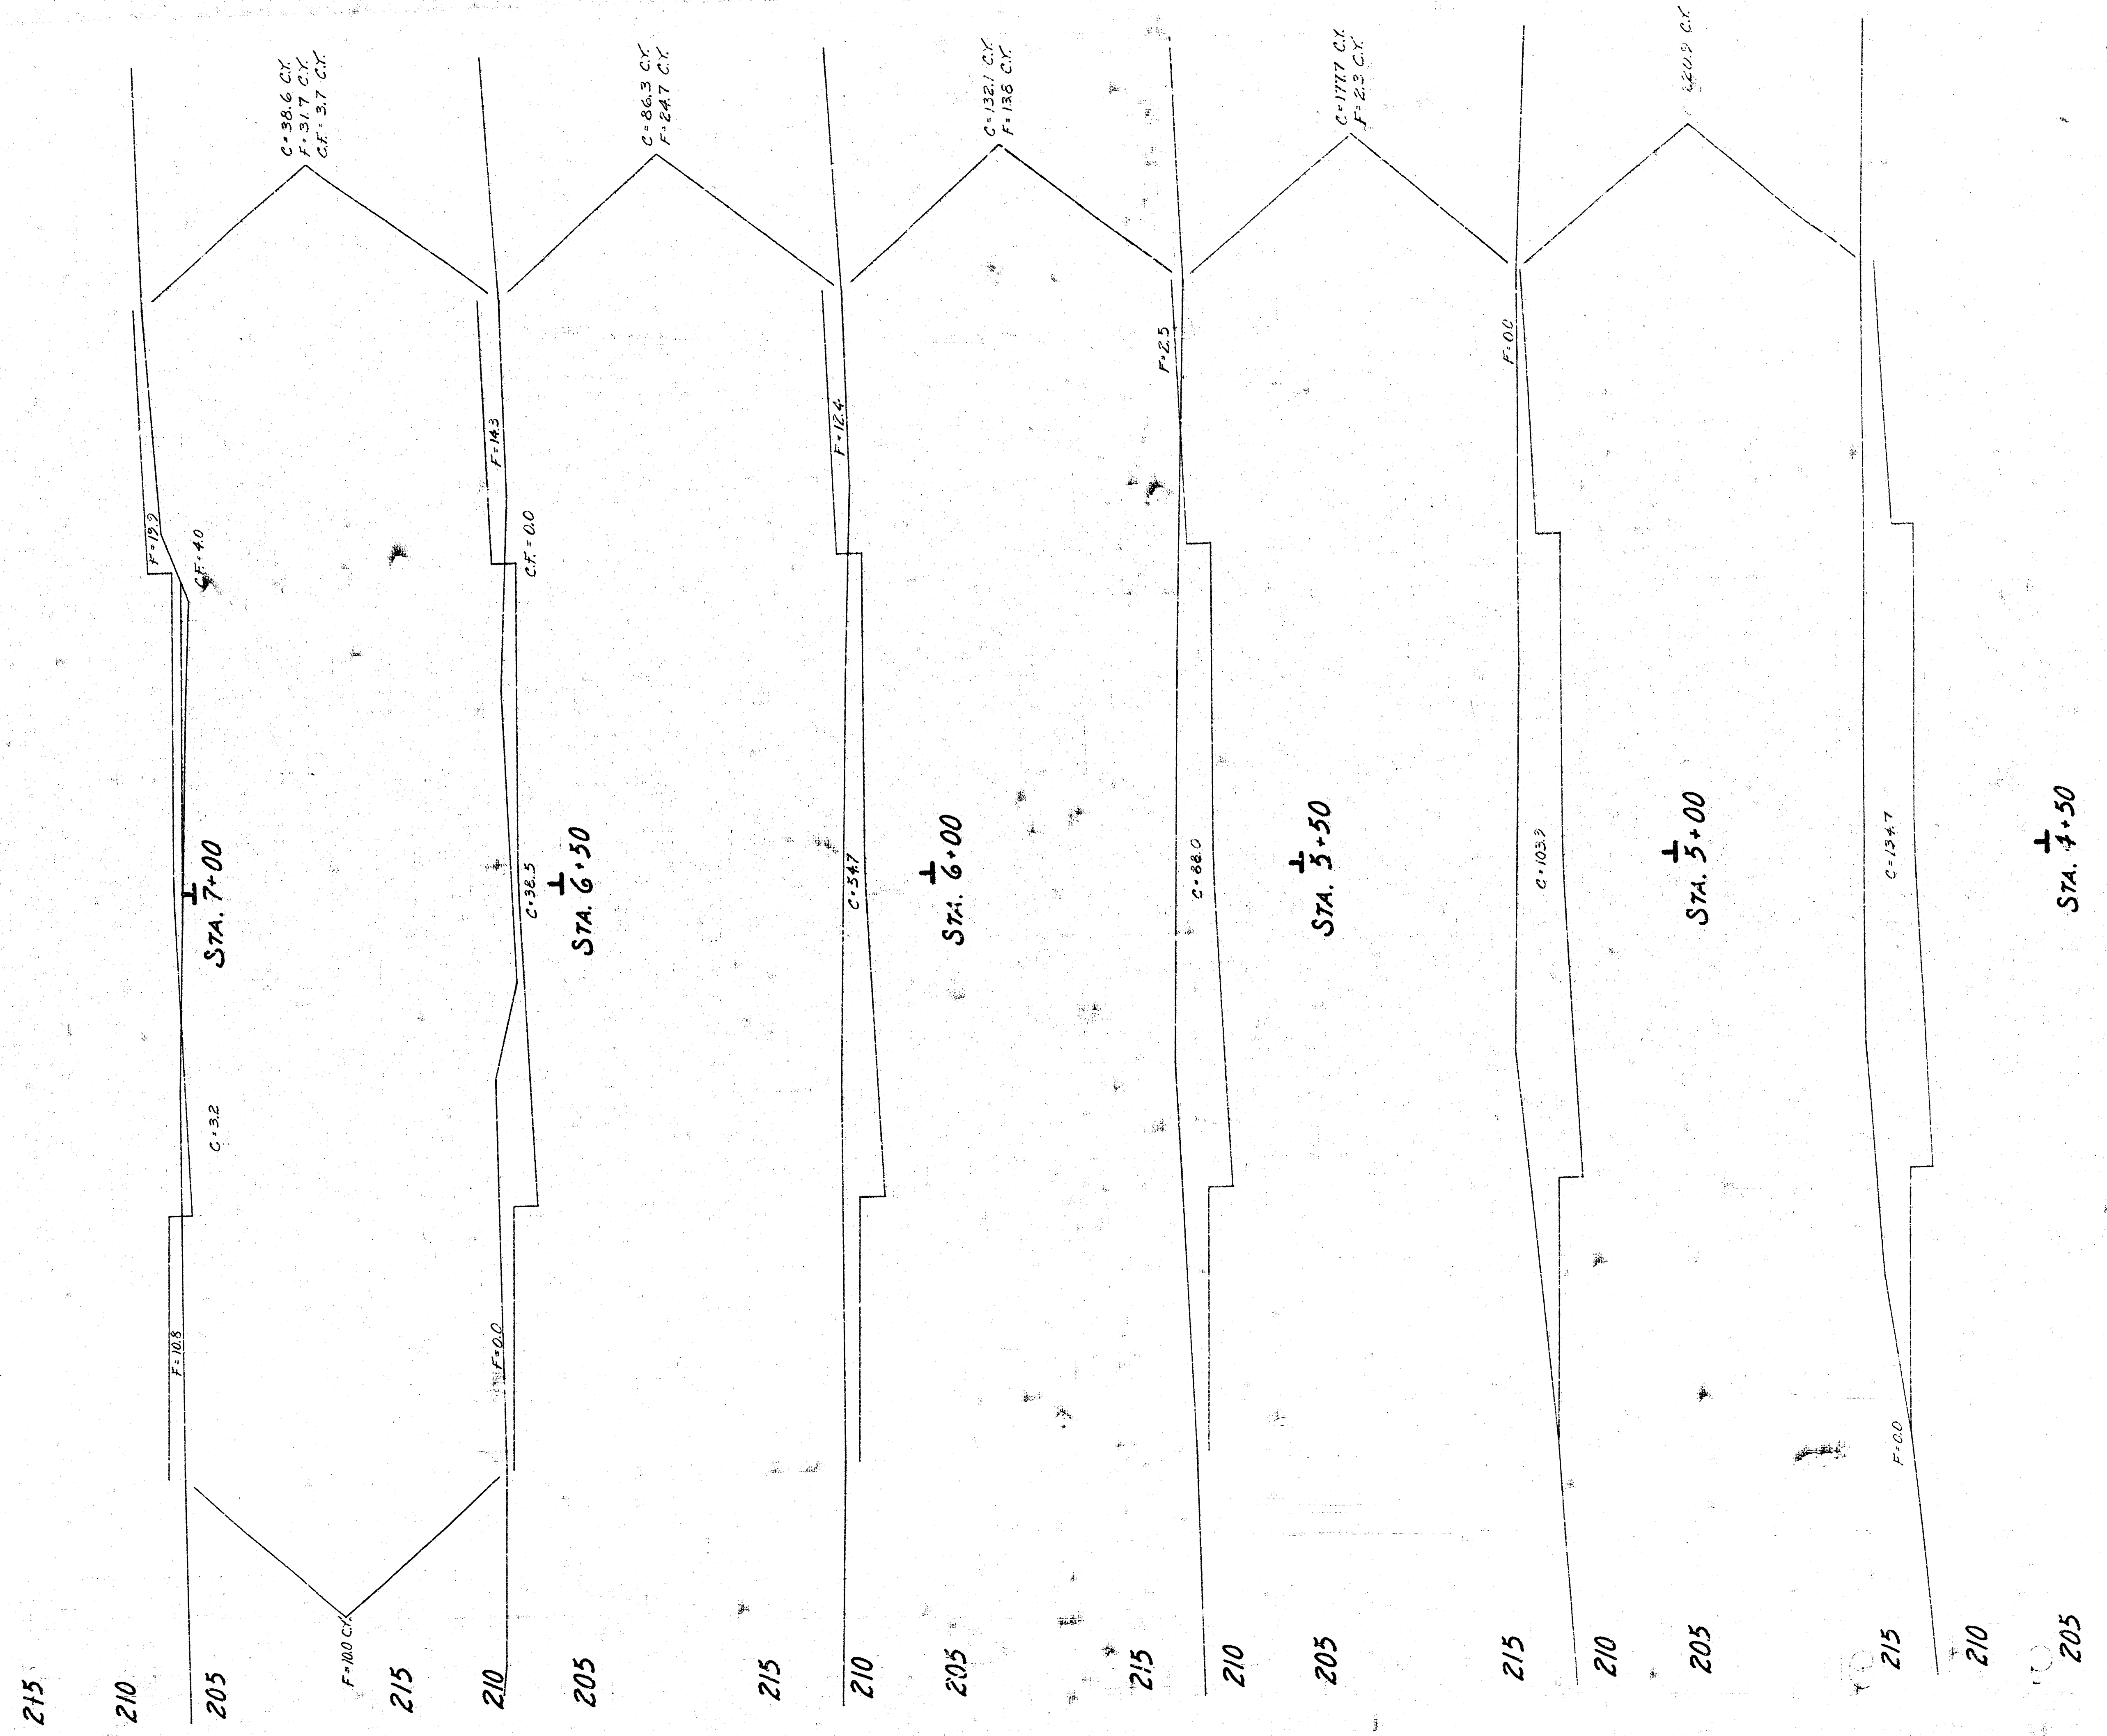

40 35 30 25 20 15 10 5 0 5 10 15 20 25 30 35 40
 PINECREST AVENUE
 472 76 245 30884 000 000 001