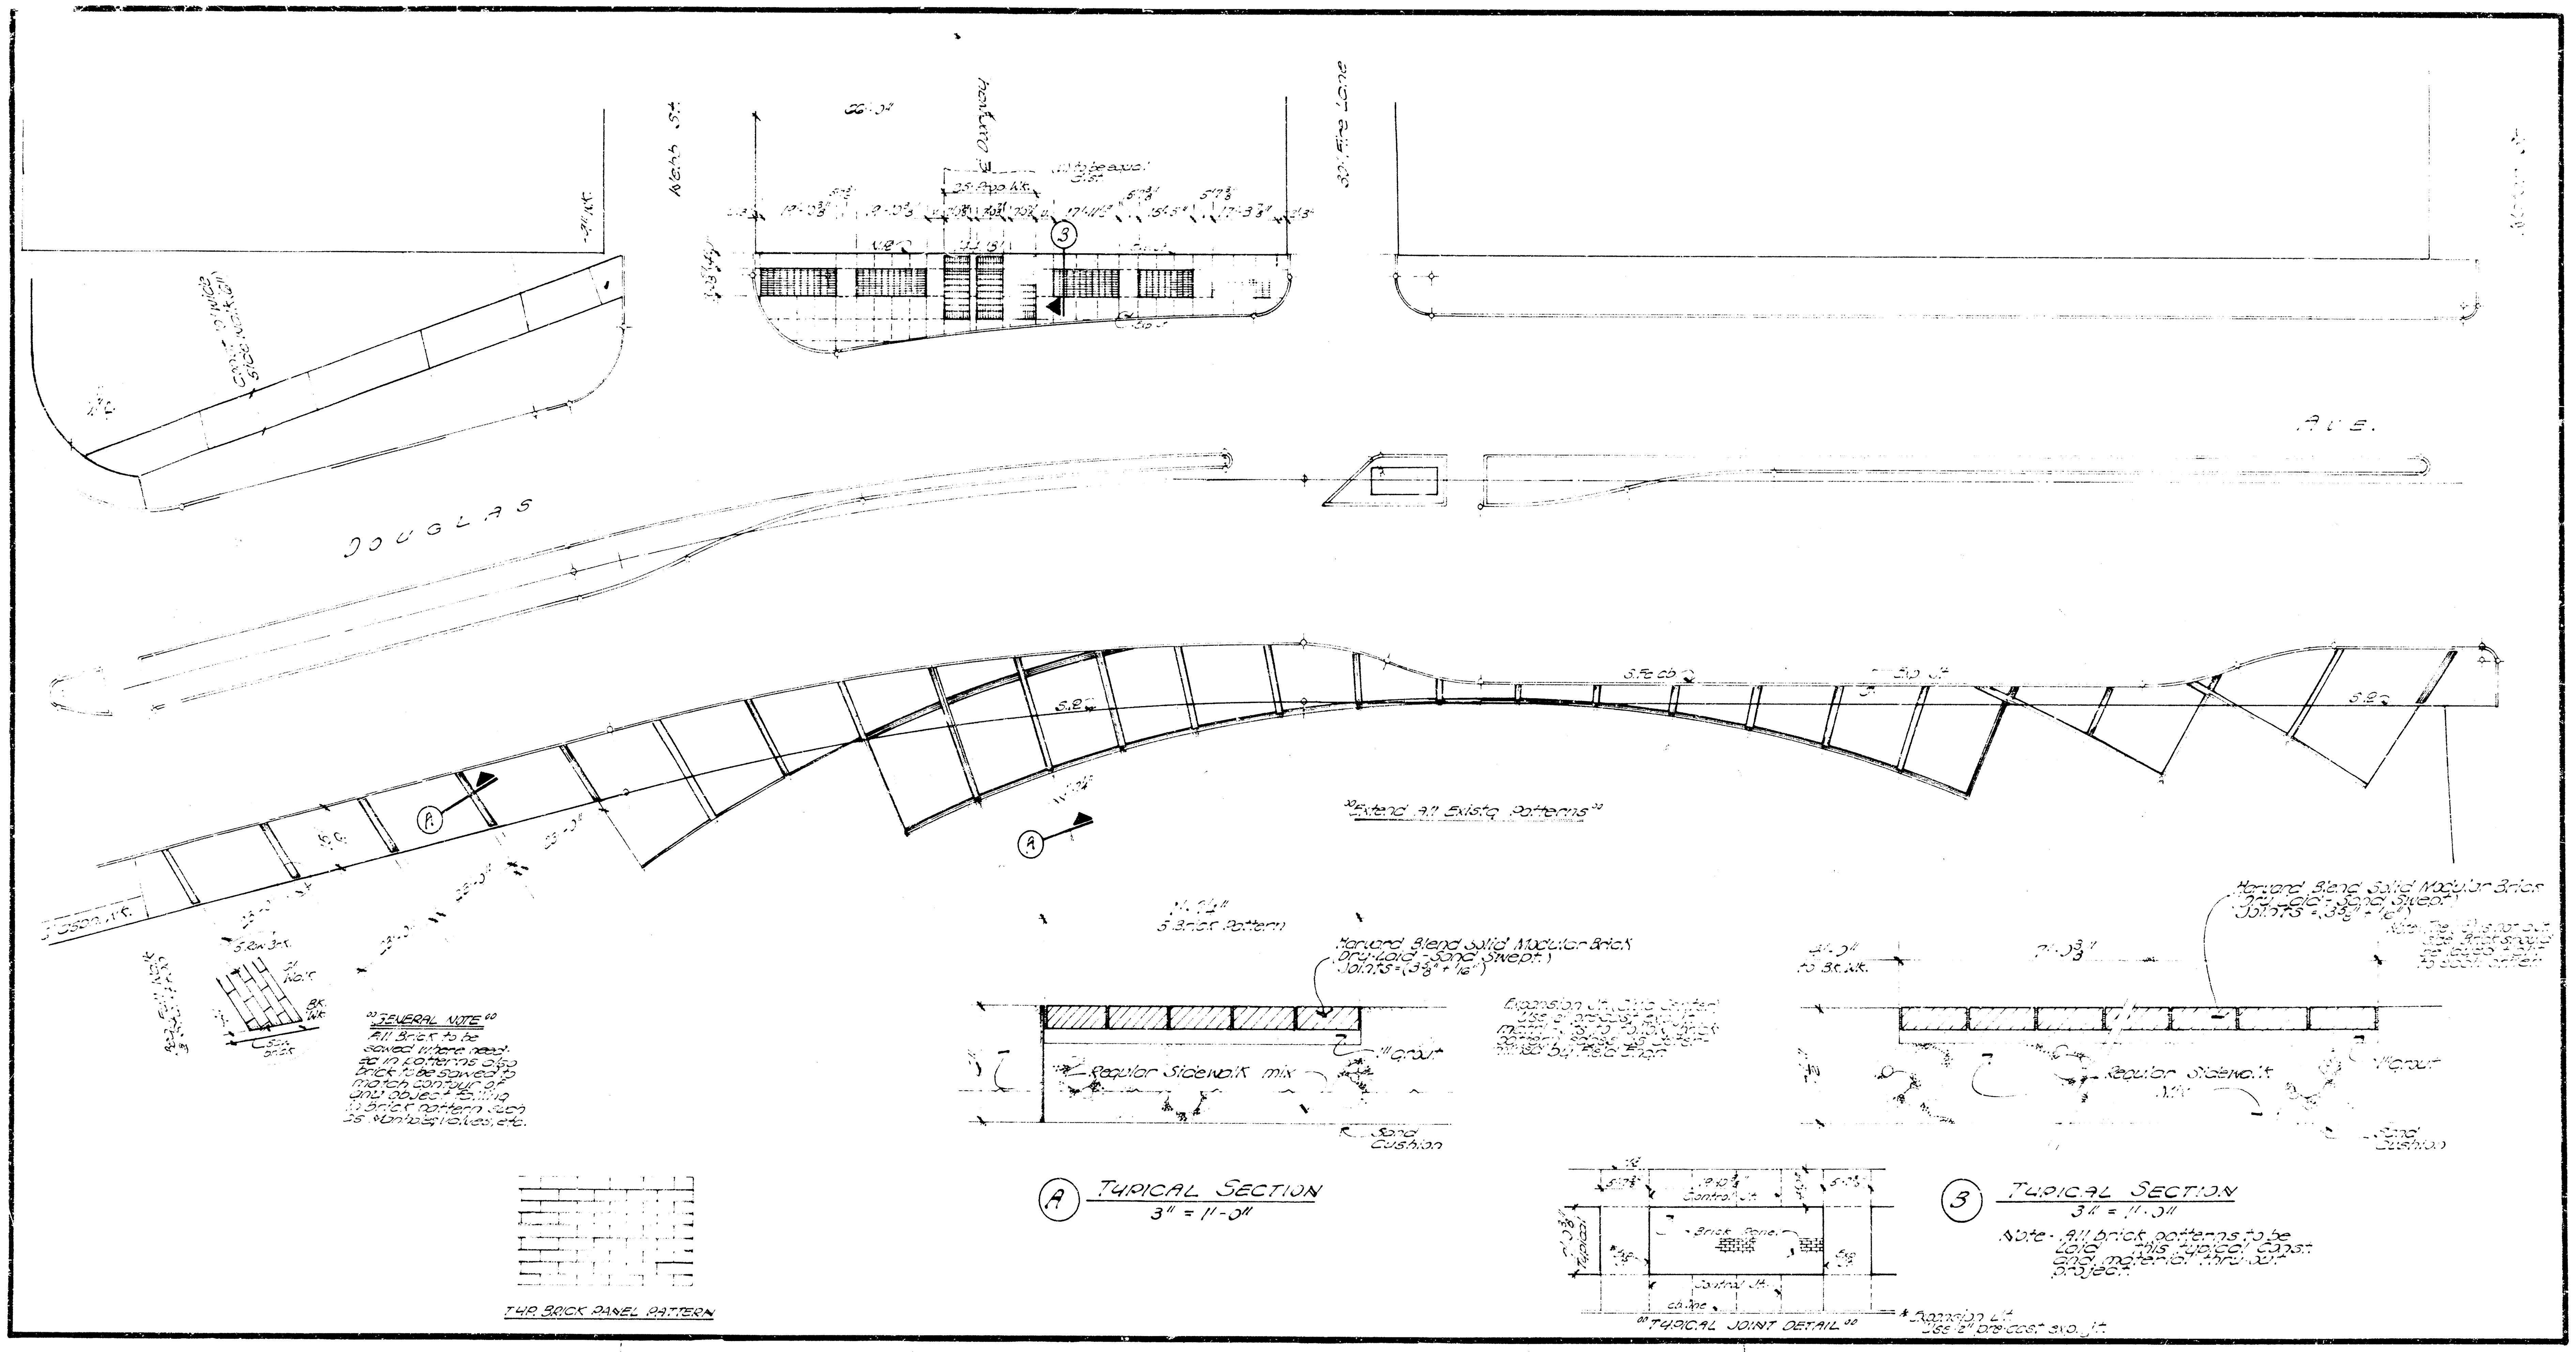
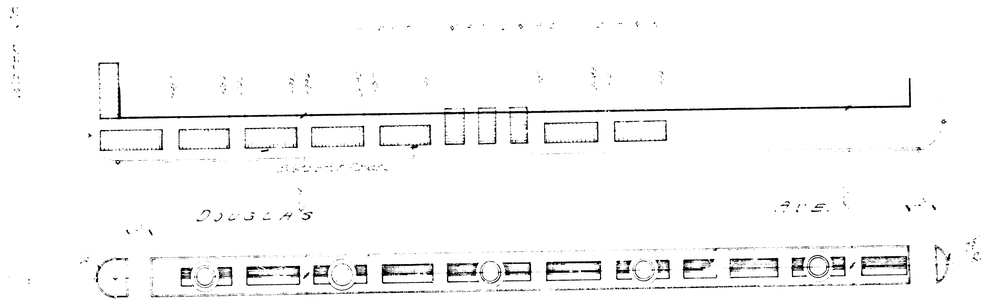

Webb St.
30' Fire Lane
DOUGLAS
AVE.
"Extend All Existg Patterns"
5 Brick Pattern
Harvard Blend Solid Modular Brick
Dry-Laid - Sand Swept)
Joints = (3/8" + 1/16")
Regular Sidewalk mix
1" Grout
Sand Cushion
A TYPICAL SECTION
3" = 1'-0"
3 TYPICAL SECTION
3" = 1'-0"
Note - All brick patterns to be laid this typical const. and material thru-out project.
"GENERAL NOTE"
All Brick to be sawed where needed in patterns also brick to be sawed to match contour of any object falling in brick pattern such as Manholes, Valves, etc.
TYP. BRICK PANEL PATTERN
Control Jt.
Brick Panel
"TYPICAL JOINT DETAIL"
* Expansion Jt.
Use 1/2" pre-cast exp. jt.


DOUGLAS
AVE.
3