B. M. 170.03 "X" cut top c. cb Doreen @ S. radius on S.E. cor Killarney Place & Doreen.

B. M. 7a.27 Top N. cb S. of SW cor. lot 5 Blk 1 Woodlawn East 3rd Addn. (End of exist. cb).

T. B. M. 78.58 Top E. ring exist. M.H. 4' W. of S.W. cor. Lot 1 Blk. 2 Woodlawn East 3rd. Addn.

Survey by D.L.K. / M.K. D.L.K. "A"
Plan by D.W.
Checked by L.Y.

DONEGAL LANE

This pl. being 235' S. of the N.L. S.E. ¼ Sec. 18 - T27S - R2E.

This pl. being 350' W. and 185' S. of the N.E. cor. of the S.E. ¼ Sec. 18 - T27S - R2E.

This pl. being 85' S. & 60' W. of the N.E. cor. of the S.E. ¼ Sec. 18 - T27S - R2E of the 6th P.M.

Sta. 5+02.6 Const. Std. M.H. Type "A"

Sta. 7+90.0 Const. Std. M.H. Type "A"

Sta. 1+77.4 Const. Std. M.H. Type "A"

ROCK ROAD

42" Centerline Pipeline Easement

WOODLAWN EAST THIRD ADDITION

LINE NO. 1

PLACE

KILLARNEY

NOTE:
Field Engr. to verify rim line elev. of exist. San. Sewer at Sta. 0+00.0 prior to construction.

Sta. 0+00.0 Exist. 8" V.C.P. Beg. Project

Exist. MH Rim 178.50 Flo 168.80

Proposed S. cb of Donegal Lane

Proposed N. cb of Killarney Pl.

Natural ground

Exist. 8" V.C.P. @ 0.20 % +

8" Clay Pipe @ 0.80 %

8" Clay Pipe @ 0.40 %

8" Clay Pipe @ 0.42 %

0.80 % grade

0.40 % grade

169.10 169.30 169.45 Flo out 169.55 Flo in 169.65 170.05 170.45 170.85 170.95 Flo 171.65 171.97 Flo

780 lin. ft. of 8" Clay pipe.

0 1 2 3 4 5 6 7

Plan Scale 1" = 40'
Profile Scale 1" = 4' Horiz.
1" = 4' Vert.

LAT. 16, SUBMAIN 12, W. I. S.
CITY OF WICHITA, KANSAS
B. E. SMITH CITY ENGINEER
FEB. 1971 PROJECT NO. C 29-24

1/2

DONEGAL LANE

This pi being 235' S. & 200' E. of the N.W. cor. of the E½ of the SE¼ Sec. 12 - T27S - R. 2 E. of the 6th P.M.

This pi being 235' S. of the S.L. SE¼ Sec. 18 - T27S - R. 3 E. of the 6th P.M.

Sta. 0+00.0 Const. Std. M.H. Type "A" over Exist. 8" San. Sewer.

NOTE:
Field Engr. to verify flo line e.s.v. of Exist San. Sewer at Sta. 0+00.0 prior to construction.

Exist. M.H. Flo 178.54 Flo 168.32

Sta. 1+13.2 Const. Std. M.H. Type "A"

Sta. 1+38.0 Const. Std. M.H. Type "A"

Sta. 5+15.0 Const. Std. M.H. Type "A"

LAWRENCE LANE

DOREEN ST.


LINE NO. 2

WOODLAWN EAST THIRD ADDITION

KILLARNEY PLACE

Exist. pav'm't.

Exist. M.H. Flo 169.93 Flo 159.35

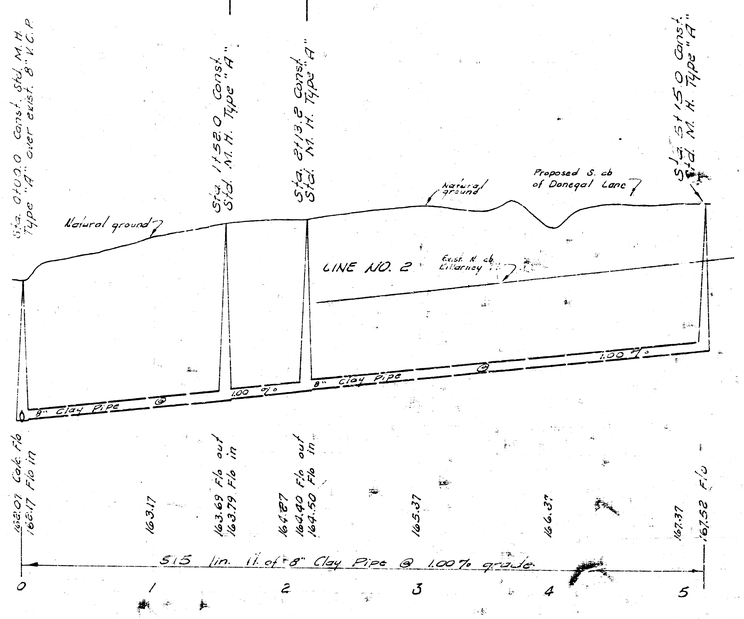

LAT. 16, SUBMAIN 12, W. I. S.
PROJECT NO. C29-24

2/2