Survey Riggs AR-52
Plan Schneider
Est.
Check

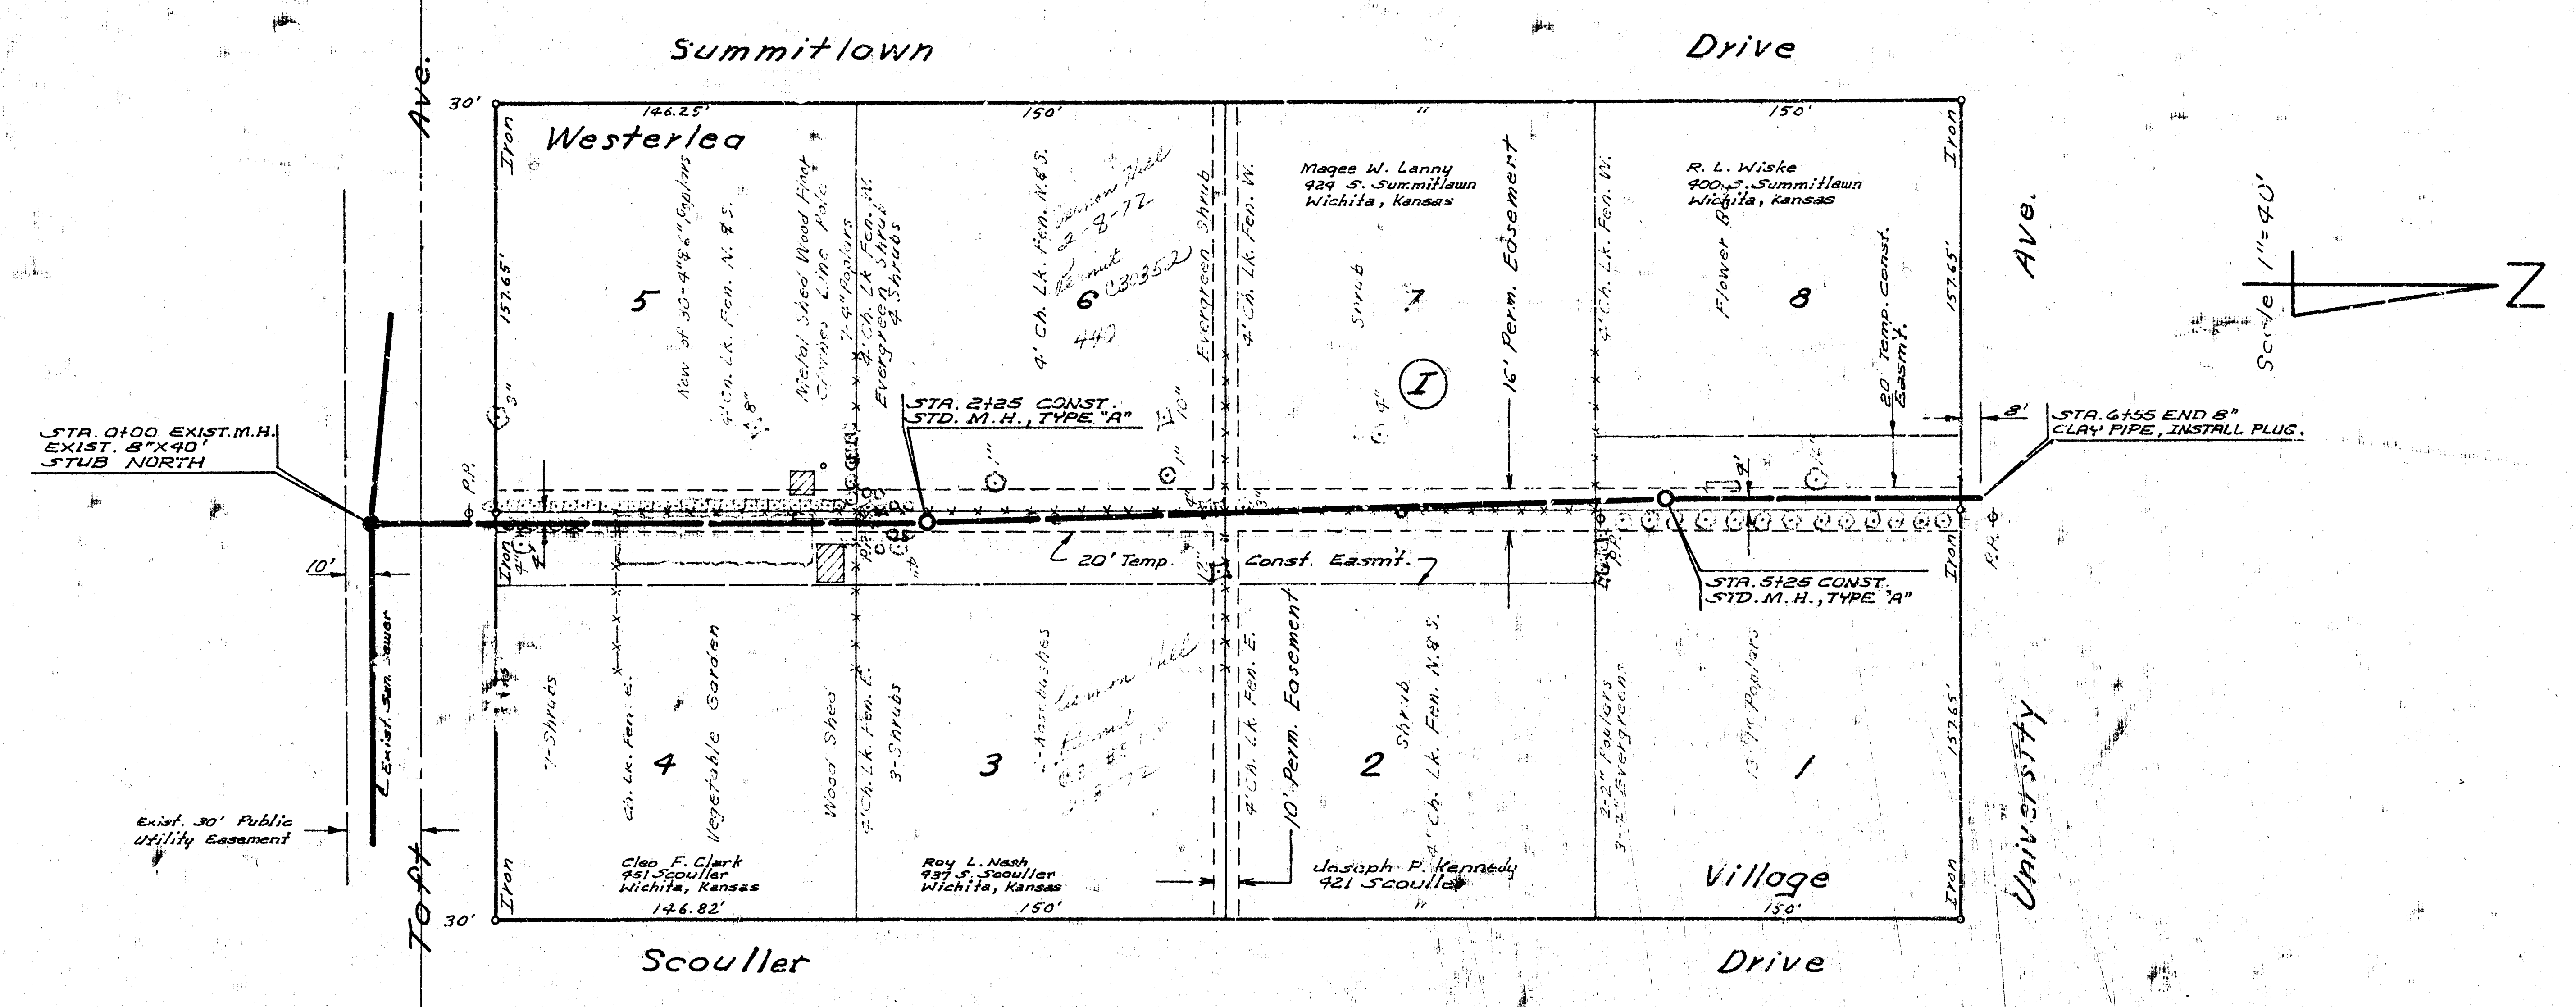
Summitlown
Drive
Westerlea
Toft
Ave.
Ave.
University
Village
Scouller
Drive
Scale 1"=40'
N
30'
30'
146.25'
150'
150'
146.82'
150'
150'
157.65'
157.65'
Iron
Iron
Iron
Iron
5
6
7
8
4
3
2
1
I
Row of 30-4"&6" Poplars
4' Ch. Lk. Fen. N. & S.
Metal Shed Wood Fence Chimes Line Pole
7-4" Poplars
4' Ch. Lk. Fen. N.
Evergreen Shrub
4 Shrubs
4' Ch. Lk. Fen. N. & S.
Evergreen Shrub
4' Ch. Lk. Fen. W.
Shrub
16' Perm. Easement
4' Ch. Lk. Fen. W.
Flower Bed
20' Temp. Const. Easm't.
Magee W. Lanny
424 S. Summitlawn
Wichita, Kansas
R. L. Wiske
400 S. Summitlawn
Wichita, Kansas
STA. 0+00 EXIST. M.H.
EXIST. 8"X40'
STUB NORTH
STA. 2+25 CONST.
STD. M.H., TYPE "A"
STA. 5+25 CONST.
STD. M.H., TYPE "A"
STA. 6+55 END 8"
CLAY PIPE, INSTALL PLUG.
8'
10'
20' Temp.
Const. Easm't.
P.P.
P.P.
Exist. San. Sewer
Exist. 30' Public
Utility Easement
7-Shrubs
Ch. Lk. Fen. E.
Vegetable Garden
Wood Shed
4' Ch. Lk. Fen. E.
3-Shrubs
4' Ch. Lk. Fen. E.
10' Perm. Easement
Shrub
4' Ch. Lk. Fen. N. & S.
2-2" Poplars
3-2" Evergreens
13-9" Poplars
Cleo F. Clark
451 Scouller
Wichita, Kansas
Roy L. Nash
437 S. Scouller
Wichita, Kansas
Joseph P. Kennedy
421 Scouller
2-8-72
Permit
C30352
440

B.M. 135.88 R.R. Spike west side P.P. between
Summitlown & Scouler on N.S. Toft.

Plan Scale 1"=40'
Profile Scale Horz. 1"=40'
Vert. 1"=4'

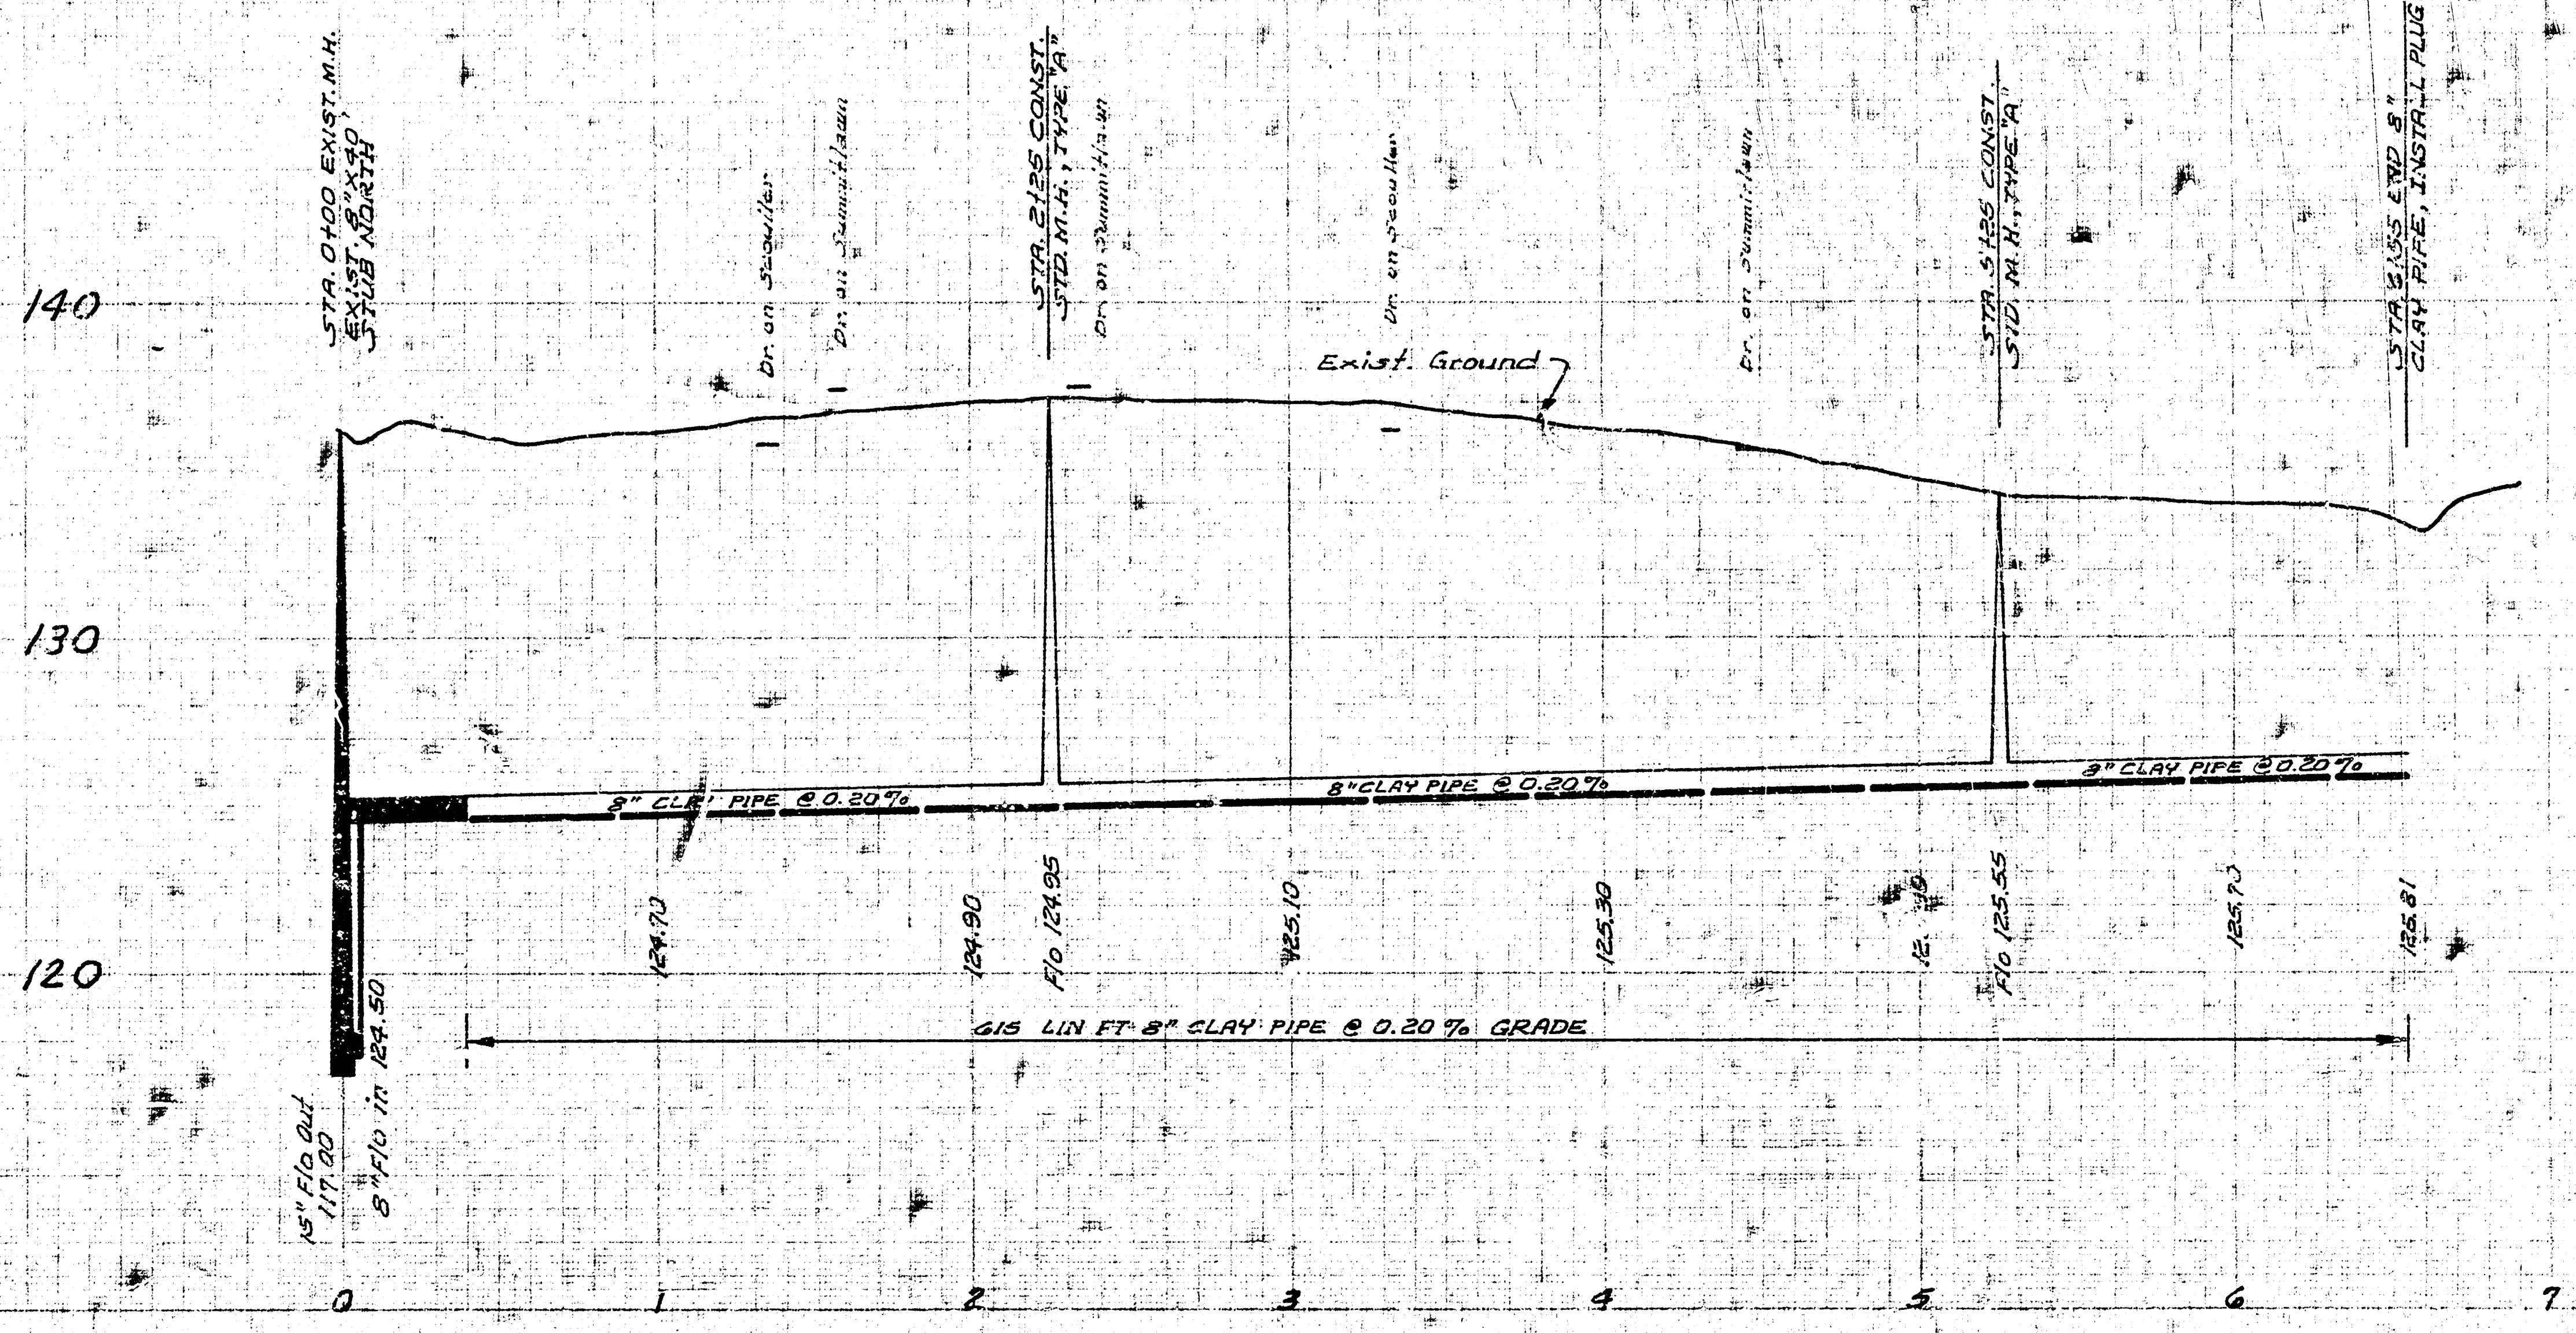
140
130
120
STA. 0+00 EXIST. M.H.
EXIST. 8"X40'
STUB NORTH
Dr. on Scouller
Dr. on Summitlawn
STA. 2+25 CONST.
STD. M.H., TYPE "A"
Dr. on Summitlawn
Dr. on Scouller
Exist. Ground
Dr. on Summitlawn
STA. 5+25 CONST.
STD. M.H., TYPE "A"
STA. 6+55 END 8"
CLAY PIPE, INSTALL PLUG
8" CLAY PIPE @ 0.20%
8" CLAY PIPE @ 0.20%
8" CLAY PIPE @ 0.20%
124.70
124.90
F/O 124.95
125.10
125.30
F/O 125.55
125.70
125.81
615 LIN FT 8" CLAY PIPE @ 0.20% GRADE
15" F/O out 117.00
8" F/O in 124.50
0
1
2
3
4
5
6
7

LAT. 34, S. W. INT. SEWER

CITY OF WICHITA, KANSAS
R.W. LINN, CITY ENGINEER
PROJ. NO. DBKL570005
DATE: Dec. 1971

14 3 3 ①