STATE	PROJECT NO.	YEAR	SHEET NO.	TOTAL SHEETS
KANSAS	54–87 K–8258–08	2005	54	223

SCHEDULE OF INLETS & MANHOLES

STRUCT. NO.	STATION	LOCATION	OFFSET		GRATE INLET SPECIAL	GRATE INLET SPECIAL (2)		STD. TYPE P MH	CURB INLET TYPE 1A		DROP INLET		PIPE DATA									STRUCTURE INFO.						STORM SEWER – RCP (m)													Ht. Fill (m)	Remarks
													INFLOW PIPES				OUTFLOW PIPE										– (mm)	375 (mm)	450 (mm)	600 (mm)	750 (mm)	900 (mm)	1050 (mm)	1200 (mm)	1350 (mm)	1500 (mm)	1650 (mm)	2100 (mm)	– (mm)		
			DIST. (m)	SIDE					150x1500	150x3000			SIZE (mm)	FL EL.	SIZE (mm)	FL EL.	SIZE (mm)	FL EL.	SIZE (mm)	FL EL.	SLOPE (%)	TOP ELEV.	FLOOR ELEV.	H mm	W mm	L mm	STEPS (No.)														
1218	3+987.147	Kellogg	29.661	Lt.											375(N)(Ex.)	410.809	750(SW)	410.152	(Ex)	410.102	–	412.228	–	–	–	–	–	0.7	–		–	–	–	–	–	–	–	–	–	CONN. TO EXIST.
1219	3+945.095	N. Frontage Rd.	41.162	Rt.	–	–		1					600(E)	407.693	–	–	750(Ex.)	410.460	750(N)	410.400	0.585	411.900	–	–	–	–	–	–	–	40.5	–	–	–	–				–	–	
467	4+125.000	Kellogg	15.122	Rt.	–	–			1				–	–	–	–			375(N)	408.800	0.521	410.689	–	–	–	–	–	27.8	–		–	–	–	–	–				–	–	
468	4+125.000	Kellogg	9.824	Lt.	–	–			1				–	–	–	–	375(S)	408.670	375(E)	408.580	0.843	410.666	–	–	–	–	–	86.1	–		–	–	–	–	–				–	–	
469	4+212.961	Kellogg	14.216	Lt.	–	–			–	1			–	–	–	–	375(W)	407.858	450(E)	407.753	0.333	408.713	–	–	–	–	–	–	64.2		–	–	–	–	–				–	–	
470	4+213.000	Kellogg	14.462	Rt.	–	–			–	1			–	–	–	–	375(W)	407.858	375(SW)	–	–	408.730	–	–	–	–	–	28.2	–		–	–	–	–	–				–	–	
476	4+240.449	Kellogg	27.306	Rt.	1	–			–				–	–	375(E)	407.430	375(NW)	407.429	375(Ex.)	–	–	408.691	–	–	–	–	–	–	–		–	–	–	–	–				–	–	
477	4+277.500	Kellogg	25.762	Rt.	1	–			–				–	–	–	–	–	–	375(W)	407.894	1.000	409.364	–	–	–	–	–	36.4	–		–	–	–	–	–				–	–	
		TOTALS			2	–	–	1	2	2	–																	179.2	64.2		40.5	–	–	–	–	–	–	–	–		

NOTE: STORM SEWER PIPE SHALL BE CLASS III REINFORCED CONCRETE PIPE IN ACCORDANCE WITH THE CITY OF WICHITA STANDARD SPECIFICATIONS.

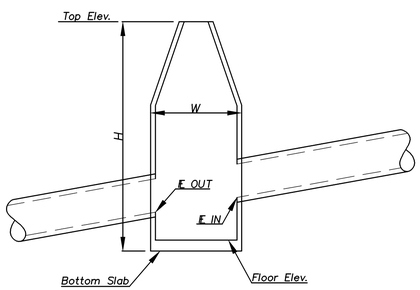

STRUCTURE INFO.

Cook, Flatt & Strobel ENGINEERS, P.A.

KANSAS DEPARTMENT OF TRANSPORTATION

SCHEDULE OF INLETS & MANHOLES

Wichita, Kansas — Sedgwick, Co.

DATE | BY | REFERENCE NOTED | REFERENCE CHECKED

Plotted: | SCALE: | Drawn by: | File:

J:\00011ph2\KELLOGG ROCK TO END\054 SCHEDULE OF INLETS 2.dwg 7/14/2005 11:54:56 AM CDT