STATE	PROJECT NO.	YEAR	SHEET NO.	SHEETS
KANSAS	87 N-0351-01	2012	46	220

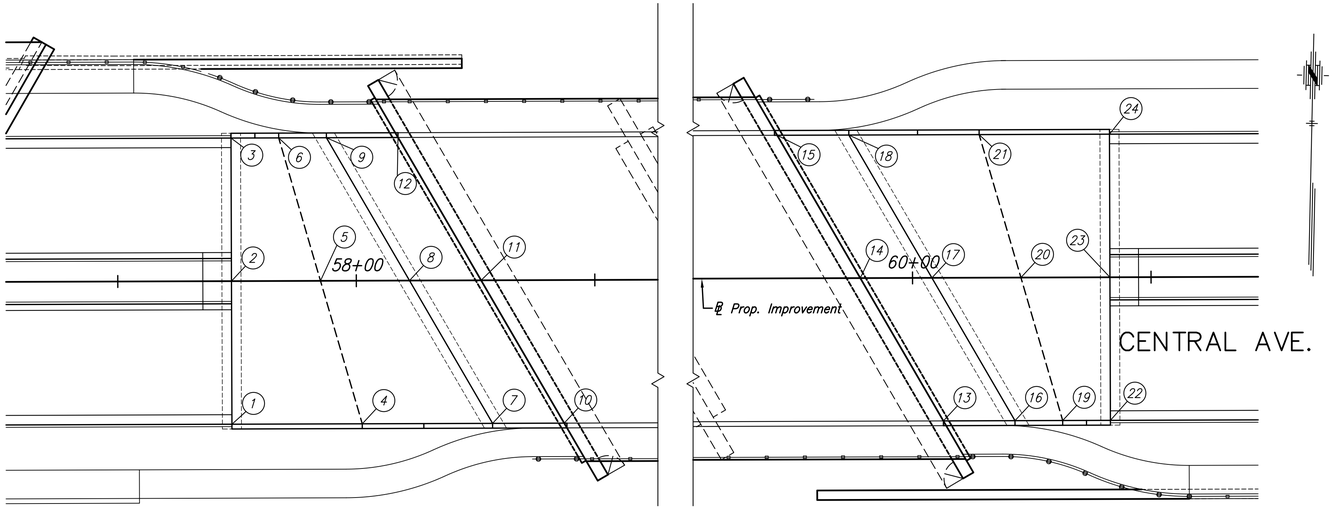

WEST APPROACH SLAB
ELEVATION PLAN

EAST APPROACH SLAB
ELEVATION PLAN

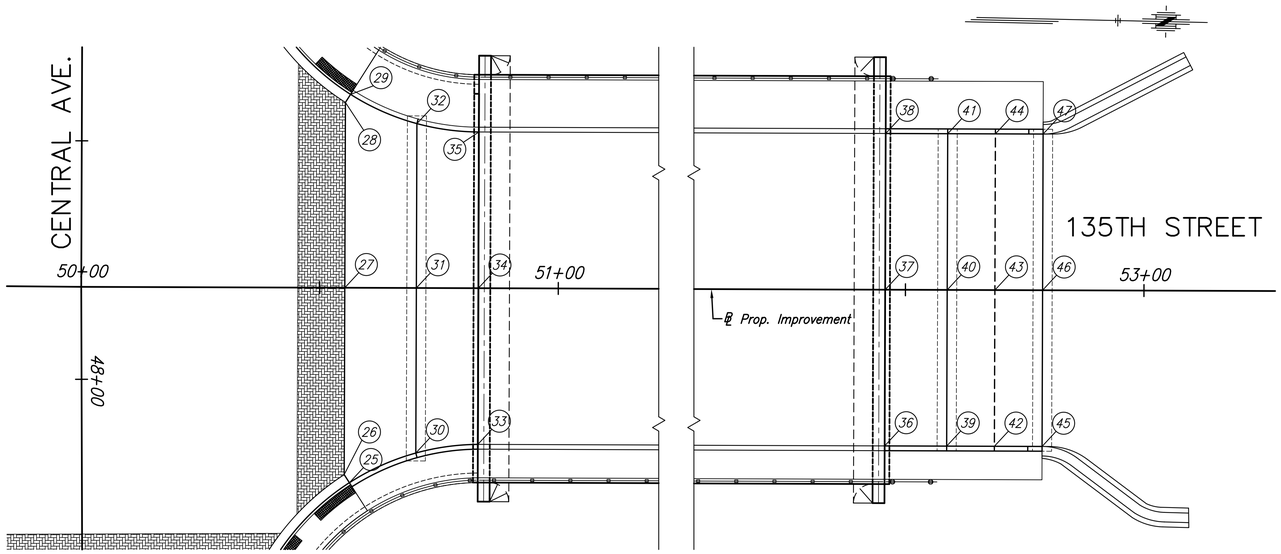

SOUTH APPROACH SLAB
ELEVATION PLAN

NORTH APPROACH SLAB
ELEVATION PLAN

WEST APPROACH SLAB ELEVATION

Point	Northing	Easting	Station	Offset	Elevation	Description
1	1687869.6455	1603234.2485	57+73.83	30.00' Rt	1348.04	West Approach
2	1687899.6361	1603233.4950	57+73.83	0.00'	1348.98	West Approach
3	1687929.6266	1603232.7416	57+73.83	30.00' Lt	1348.04	West Approach
4	1687870.3317	1603261.5604	58+01.15	30.00' Rt	1348.36	West Approach
5	1687900.1047	1603252.1494	57+92.49	0.00'	1349.07	West Approach
6	1687929.8778	1603242.7384	57+83.83	30.00' Lt	1348.22	West Approach
7	1687871.0178	1603288.8723	58+28.47	30.00' Rt	1348.68	West Approach
8	1687900.5734	1603270.8038	58+11.15	0.00'	1349.17	West Approach
9	1687930.1289	1603252.7353	57+93.83	30.00' Lt	1348.40	West Approach
10	1687871.3949	1603303.8786	58+43.48	30.00' Rt	1348.85	West Approach
11	1687900.9504	1603285.8102	58+26.16	0.00'	1349.24	West Approach
12	1687930.5059	1603267.7416	58+08.84	30.00' Lt	1348.68	West Approach

EAST APPROACH SLAB ELEVATION

Point	Northing	Easting	Station	Offset	Elevation	Description
13	1687875.4858	1603466.7133	60+06.37	30.00' Rt	1348.68	East Approach
14	1687905.0413	1603448.6455	59+89.05	0.00'	1349.24	East Approach
15	1687934.5969	1603430.5770	59+71.73	30.00' Lt	1348.85	East Approach
16	1687875.8630	1603481.7203	60+21.38	30.00' Rt	1348.40	East Approach
17	1687905.4183	1603463.6519	60+04.06	0.00'	1349.17	East Approach
18	1687934.9739	1603445.5834	59+86.74	30.00' Lt	1348.68	East Approach
19	1687876.1142	1603491.7171	60+31.38	30.00' Rt	1348.22	East Approach
20	1687905.8870	1603482.3062	60+22.72	0.00'	1349.07	East Approach
21	1687935.6600	1603472.8952	60+14.06	30.00' Lt	1348.36	East Approach
22	1687876.3653	1603501.7140	60+41.38	30.00' Rt	1348.04	East Approach
23	1687906.3556	1603500.9605	60+41.38	0.00'	1348.98	East Approach
24	1687936.3462	1603500.2071	60+41.38	30.00' Lt	1348.04	East Approach

SOUTH APPROACH SLAB ELEVATION

Point	Northing	Easting	Station	Offset	Elevation	Description
25	1687931.7863	1602280.4268	50+56.35	40.88' Rt	1349.81	South Approach
26	1687930.6550	1602278.7502	50+55.25	39.18' Rt	1349.85	South Approach
27	1687929.9319	1602239.5775	50+55.25	0.00'	1350.57	South Approach
28	1687929.2149	1602200.7347	50+55.25	38.85' Lt	1350.00	South Approach
29	1687930.2613	1602199.0220	50+56.33	40.54' Lt	1349.96	South Approach
30	1687945.5679	1602273.8983	50+70.25	34.60' Rt	1350.13	South Approach
31	1687944.9293	1602239.3007	50+70.25	0.00'	1350.72	South Approach
32	1687944.2933	1602204.8482	50+70.25	34.46' Lt	1350.19	South Approach
33	1687958.5315	1602271.8052	50+83.25	32.75' Rt	1350.31	South Approach
34	1687957.9271	1602239.0607	50+83.25	0.00'	1350.83	South Approach
35	1687957.3226	1602206.3163	50+83.25	32.75' Lt	1350.31	South Approach

NORTH APPROACH SLAB ELEVATION

Point	Northing	Easting	Station	Offset	Elevation	Description
36	1688121.0038	1602268.8060	52+45.75	32.75' Rt	1350.06	North Approach
37	1688120.3994	1602236.0616	52+45.75	0.00'	1350.58	North Approach
38	1688119.7950	1602203.3172	52+45.75	32.75' Lt	1350.06	North Approach
39	1688134.0016	1602268.5661	52+58.75	32.75' Rt	1349.94	North Approach
40	1688133.3972	1602235.8217	52+58.75	0.00'	1350.52	North Approach
41	1688132.7928	1602203.0773	52+58.75	32.75' Lt	1349.94	North Approach
42	1688143.9999	1602268.3815	52+68.75	32.75' Rt	1349.85	North Approach
43	1688143.3955	1602235.6371	52+68.75	0.00'	1350.47	North Approach
44	1688142.7911	1602202.8927	52+68.75	32.75' Lt	1349.85	North Approach
45	1688153.9982	1602268.1970	52+78.75	32.75' Rt	1349.74	North Approach
46	1688153.3938	1602235.4526	52+78.75	0.00'	1350.42	North Approach
47	1688152.7893	1602202.7081	52+78.75	32.75' Lt	1349.74	North Approach

MKEC ENGINEERING CONSULTANTS, INC.
411 N. WEBB ROAD
WICHITA, KS. 67206
316 - 684 - 9600

CENTRAL AVENUE IMPROVEMENTS FROM 135TH ST. W. TO 119TH ST. W.

APPROACH SLAB GRADING PLAN

SHEET TITLE

472-84017
PROJECT NUMBER

JRA
DESIGN BY

WNJ
DRAWN BY

JRA
CHECKED BY

ISSUED
November 9, 2012

REVISED

SHEET NO.
46 of 220

PLOTTED: Wednesday, November 14, 2012 @ 01:56PM

J:\Civil\042438\dwg\Bridge\042438approach.dwg