

FINAL PLAT

FOX RIDGE ADDITION

AN ADDITION TO WICHITA, SEDGWICK COUNTY, KANSAS

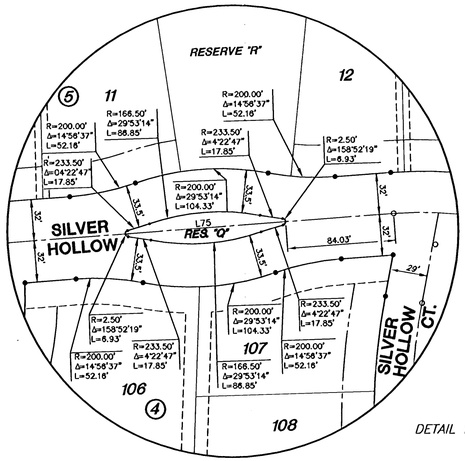

RESERVE "Q"

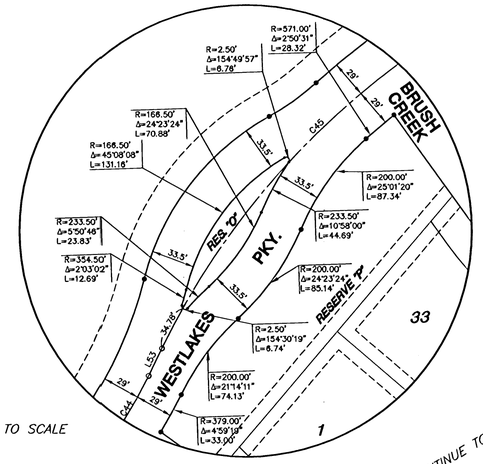


RESERVE "O"

DETAIL NOT TO SCALE

CONTINUE TO SHEET 5/6

CONTINUE TO SHEET 3/6

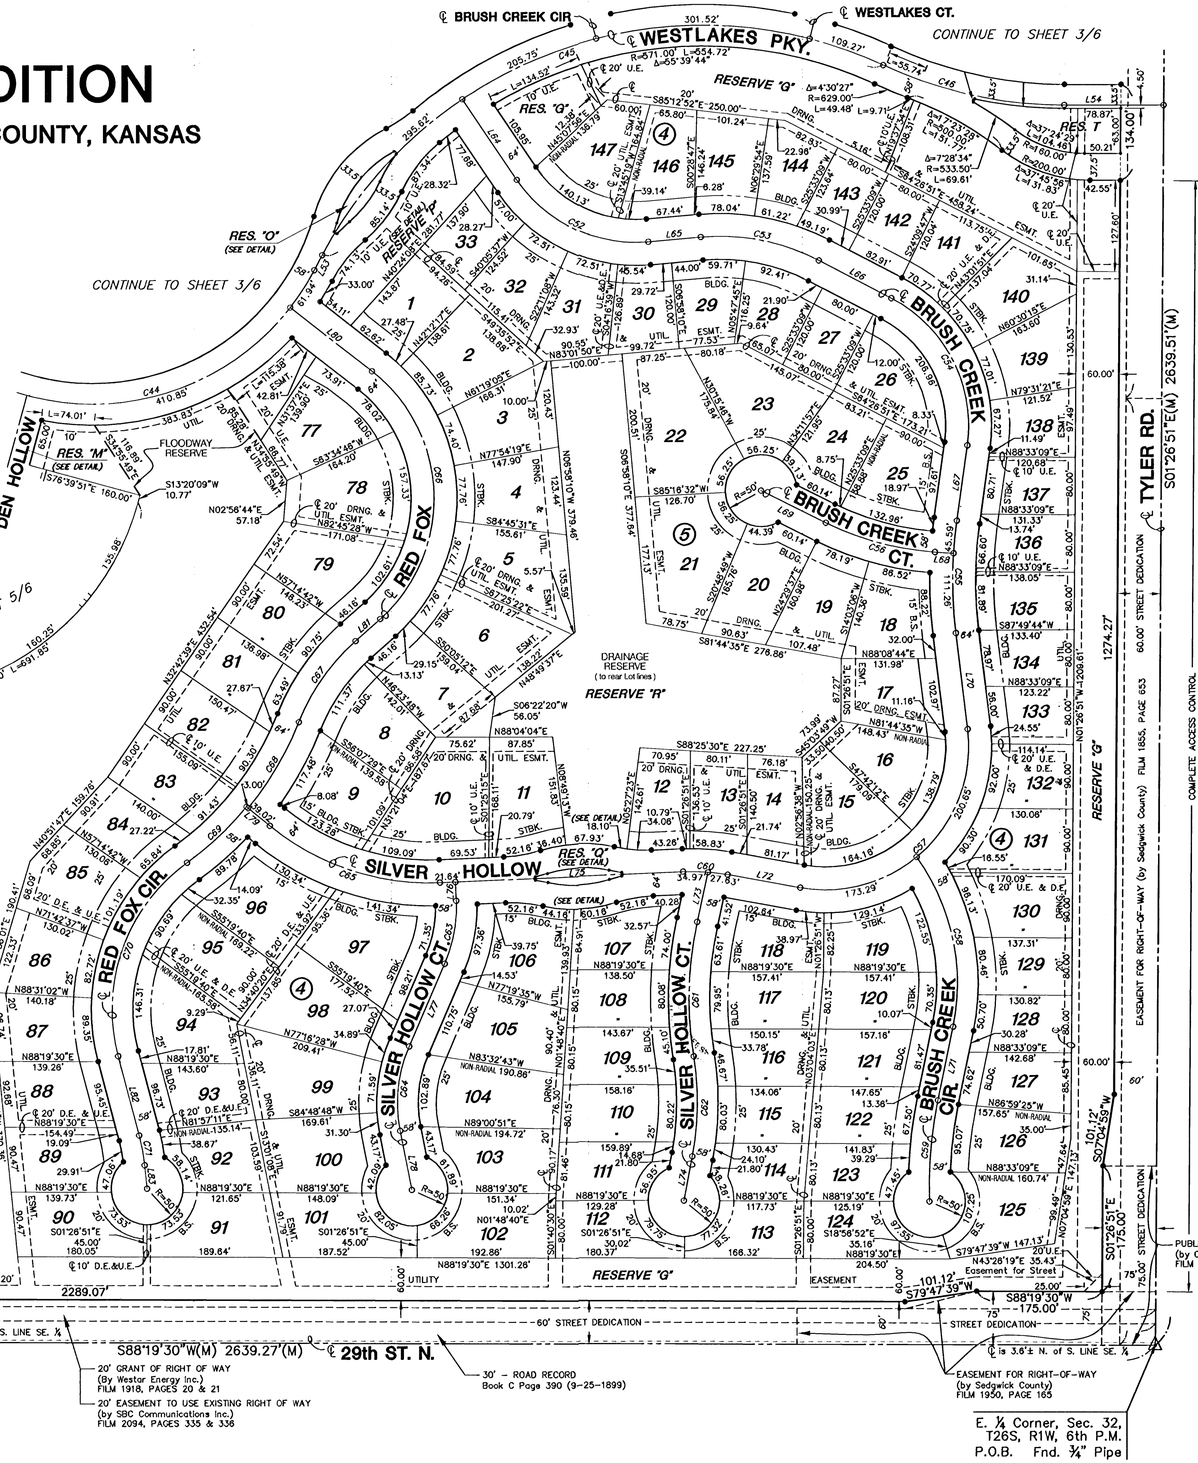

LEGEND

- △ = Found Section Corner
- O = Found Survey Monument
- ● = Set ⅝" Rebar W/ MKEC CLS 39 id. cap
- D.E. = Drainage Easement
- B.S. = Building Setback
- U.E. = Utility Easement
- (M) = Measured
- — — — = Floodway Reserve

SCALE: 1" = 100'

100 0 100 200

NOTES

1. There shall be no parking on or along Westlakes Parkway.

MINIMUM PAD ELEVATIONS (LOWEST OPENINGS)			
LOT	BLOCK	ELEVATION (CITY DATUM)	ELEVATION (NGVD)
77	4	164.9	1352.3
78	4	164.9	1352.3
79	4	164.9	1352.3
80	4	164.9	1352.3
81	4	164.9	1352.3
82	4	164.9	1352.3
83	4	164.9	1352.3
84	4	164.9	1352.3
85	4	164.9	1352.3
86	4	164.9	1352.3
87	4	164.9	1352.3
88	4	164.9	1352.3
89	4	164.9	1352.3
90	4	164.9	1352.3
2	5	167.9	1355.3
3	5	167.9	1355.3
4	5	167.9	1355.3
5	5	167.9	1355.3
6	5	167.9	1355.3
7	5	167.9	1355.3
8	5	167.9	1355.3
10	5	167.9	1355.3
11	5	167.9	1355.3
12	5	167.9	1355.3
13	5	167.9	1355.3
14	5	167.9	1355.3
15	5	167.9	1355.3
16	5	167.9	1355.3
17	5	167.9	1355.3
18	5	167.9	1355.3
19	5	167.9	1355.3
20	5	167.9	1355.3
21	5	167.9	1355.3
22	5	167.9	1355.3
30	5	167.9	1355.3
31	5	167.9	1355.3

CURVE TABLE			
CURVE	LENGTH	RADIUS	DELTA
C44	589.66'	350.00'	Δ=96°31'44"
C45	912.16'	600.00'	Δ=87°06'18"
C46	260.56'	600.00'	Δ=24°52'54"
C52	213.42'	200.00'	Δ=61°08'22"
C53	170.28'	300.00'	Δ=32°31'19"
C54	246.38'	200.00'	Δ=70°34'59"
C55	158.85'	600.00'	Δ=14°58'42"
C56	158.56'	400.00'	Δ=22°42'46"
C57	373.94'	200.00'	Δ=107°07'33"
C58	248.70'	300.00'	Δ=47°29'52"
C59	141.66'	600.00'	Δ=13°31'38"
C60	62.60'	285.00'	Δ=12°35'03"
C61	188.28'	500.00'	Δ=21°34'21"
C62	140.60'	400.00'	Δ=20°08'23"
C63	89.91'	200.00'	Δ=25°45'28"
C64	120.34'	200.00'	Δ=34°28'27"
C65	255.75'	350.00'	Δ=41°52'01"
C66	394.00'	225.00'	Δ=100°19'56"
C67	139.37'	300.00'	Δ=26°37'04"
C68	139.57'	450.00'	Δ=17°46'16"
C69	114.38'	447.00'	Δ=14°39'42"
C70	304.23'	253.00'	Δ=68°53'52"
C71	42.33'	275.00'	Δ=8°49'06"

LINE TABLE		
LINE	LENGTH	BEARING
L53	23.61'	N25°56'24"E
L54	138.63'	S88°09'47"W
L64	135.85'	S35°49'48"E
L65	73.72'	N83°01'50"E
L66	113.90'	S64°26'51"E
L67	105.94'	S06°08'04"W
L68	25.98'	S88°13'08"E
L69	100.87'	S65°30'23"E
L70	134.97'	N09°50'38"W
L71	104.90'	S09°45'06"W
L72	102.90'	S81°43'05"E
L73	70.70'	N10°28'03"E
L74	62.53'	N09°02'05"E
L75	339.88'	N85°41'51"E
L76	26.41'	N04°18'09"W
L77	125.29'	N21°27'20"E
L78	83.90'	N1°30'08"W
L79	42.02'	N52°26'08"W
L80	144.37'	S53°55'16"E
L81	46.16'	S46°24'40"W
L82	114.54'	N16°40'18"W
L83	32.69'	N07°51'12"W

G:\CIVIL\99118\DWG\PAVENT_PH1\99118A2.dwg 05/29/03 11:12:09 AM CDT