








LEGEND

-  Phase IB
-  Channelizer
-  Type III Barricade
-  Type III Barricade w/ Sign
-  Single Post/Skid Mounted Sign


Typical Section Phase IB

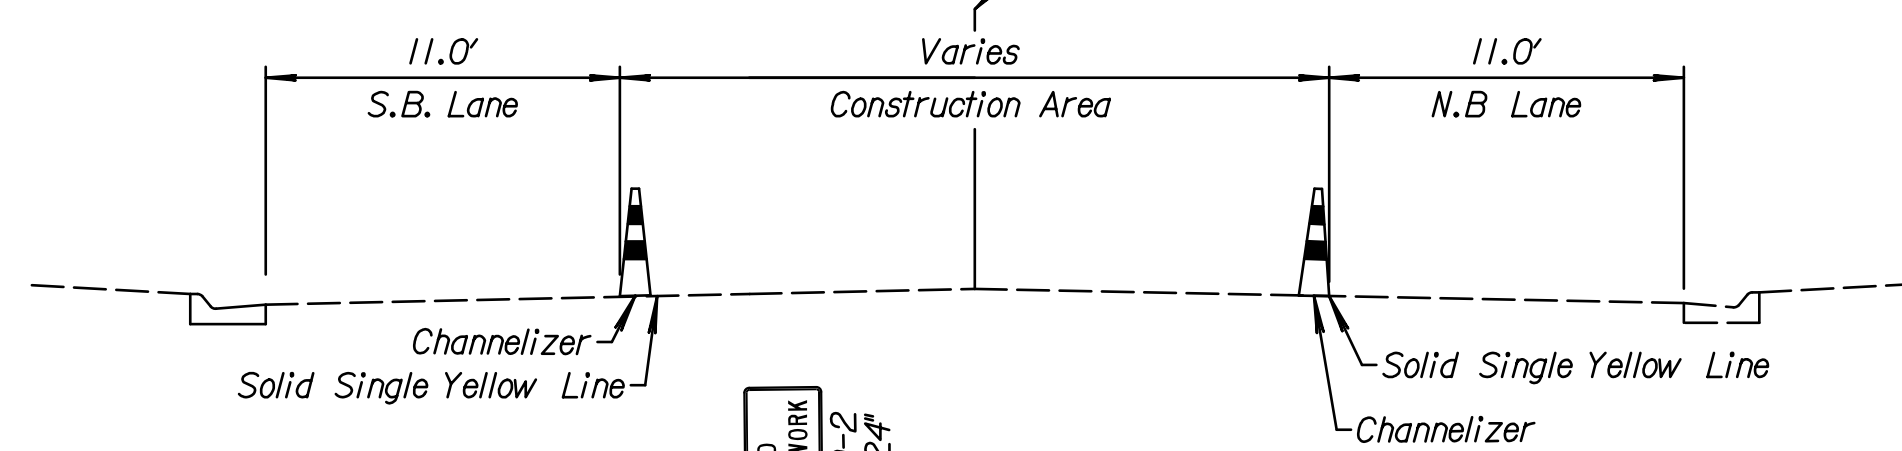

Exist. Pavement Markings (To Remain)

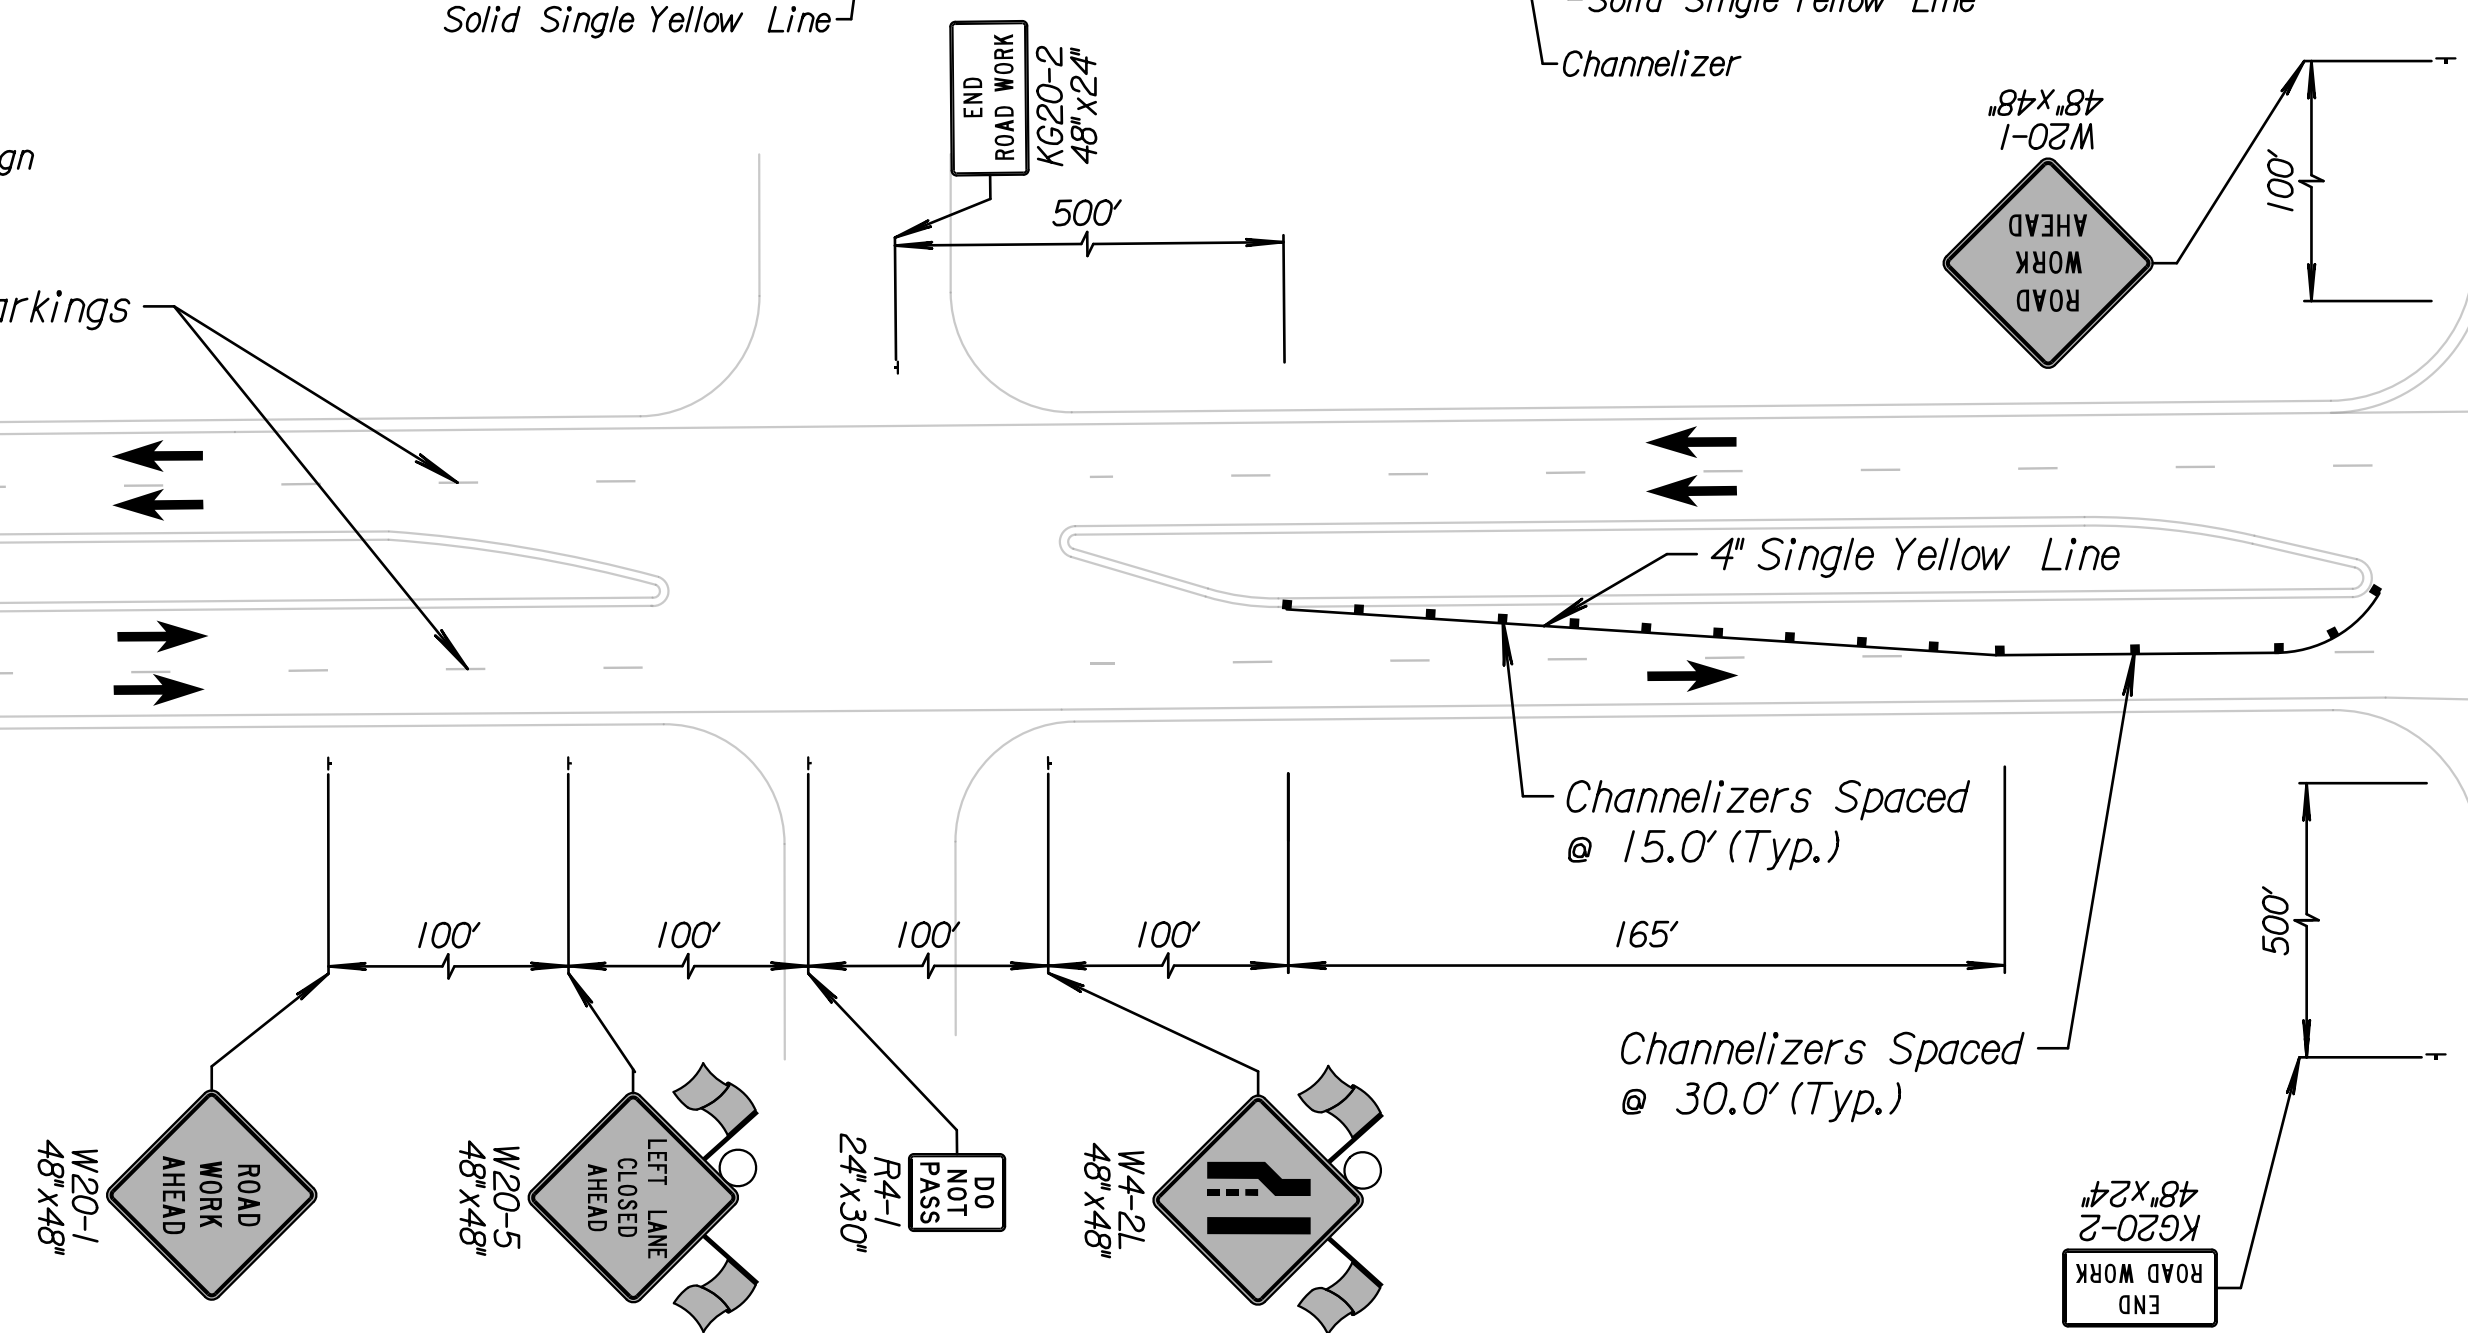

Exist. Pavement Markings (To Remain)

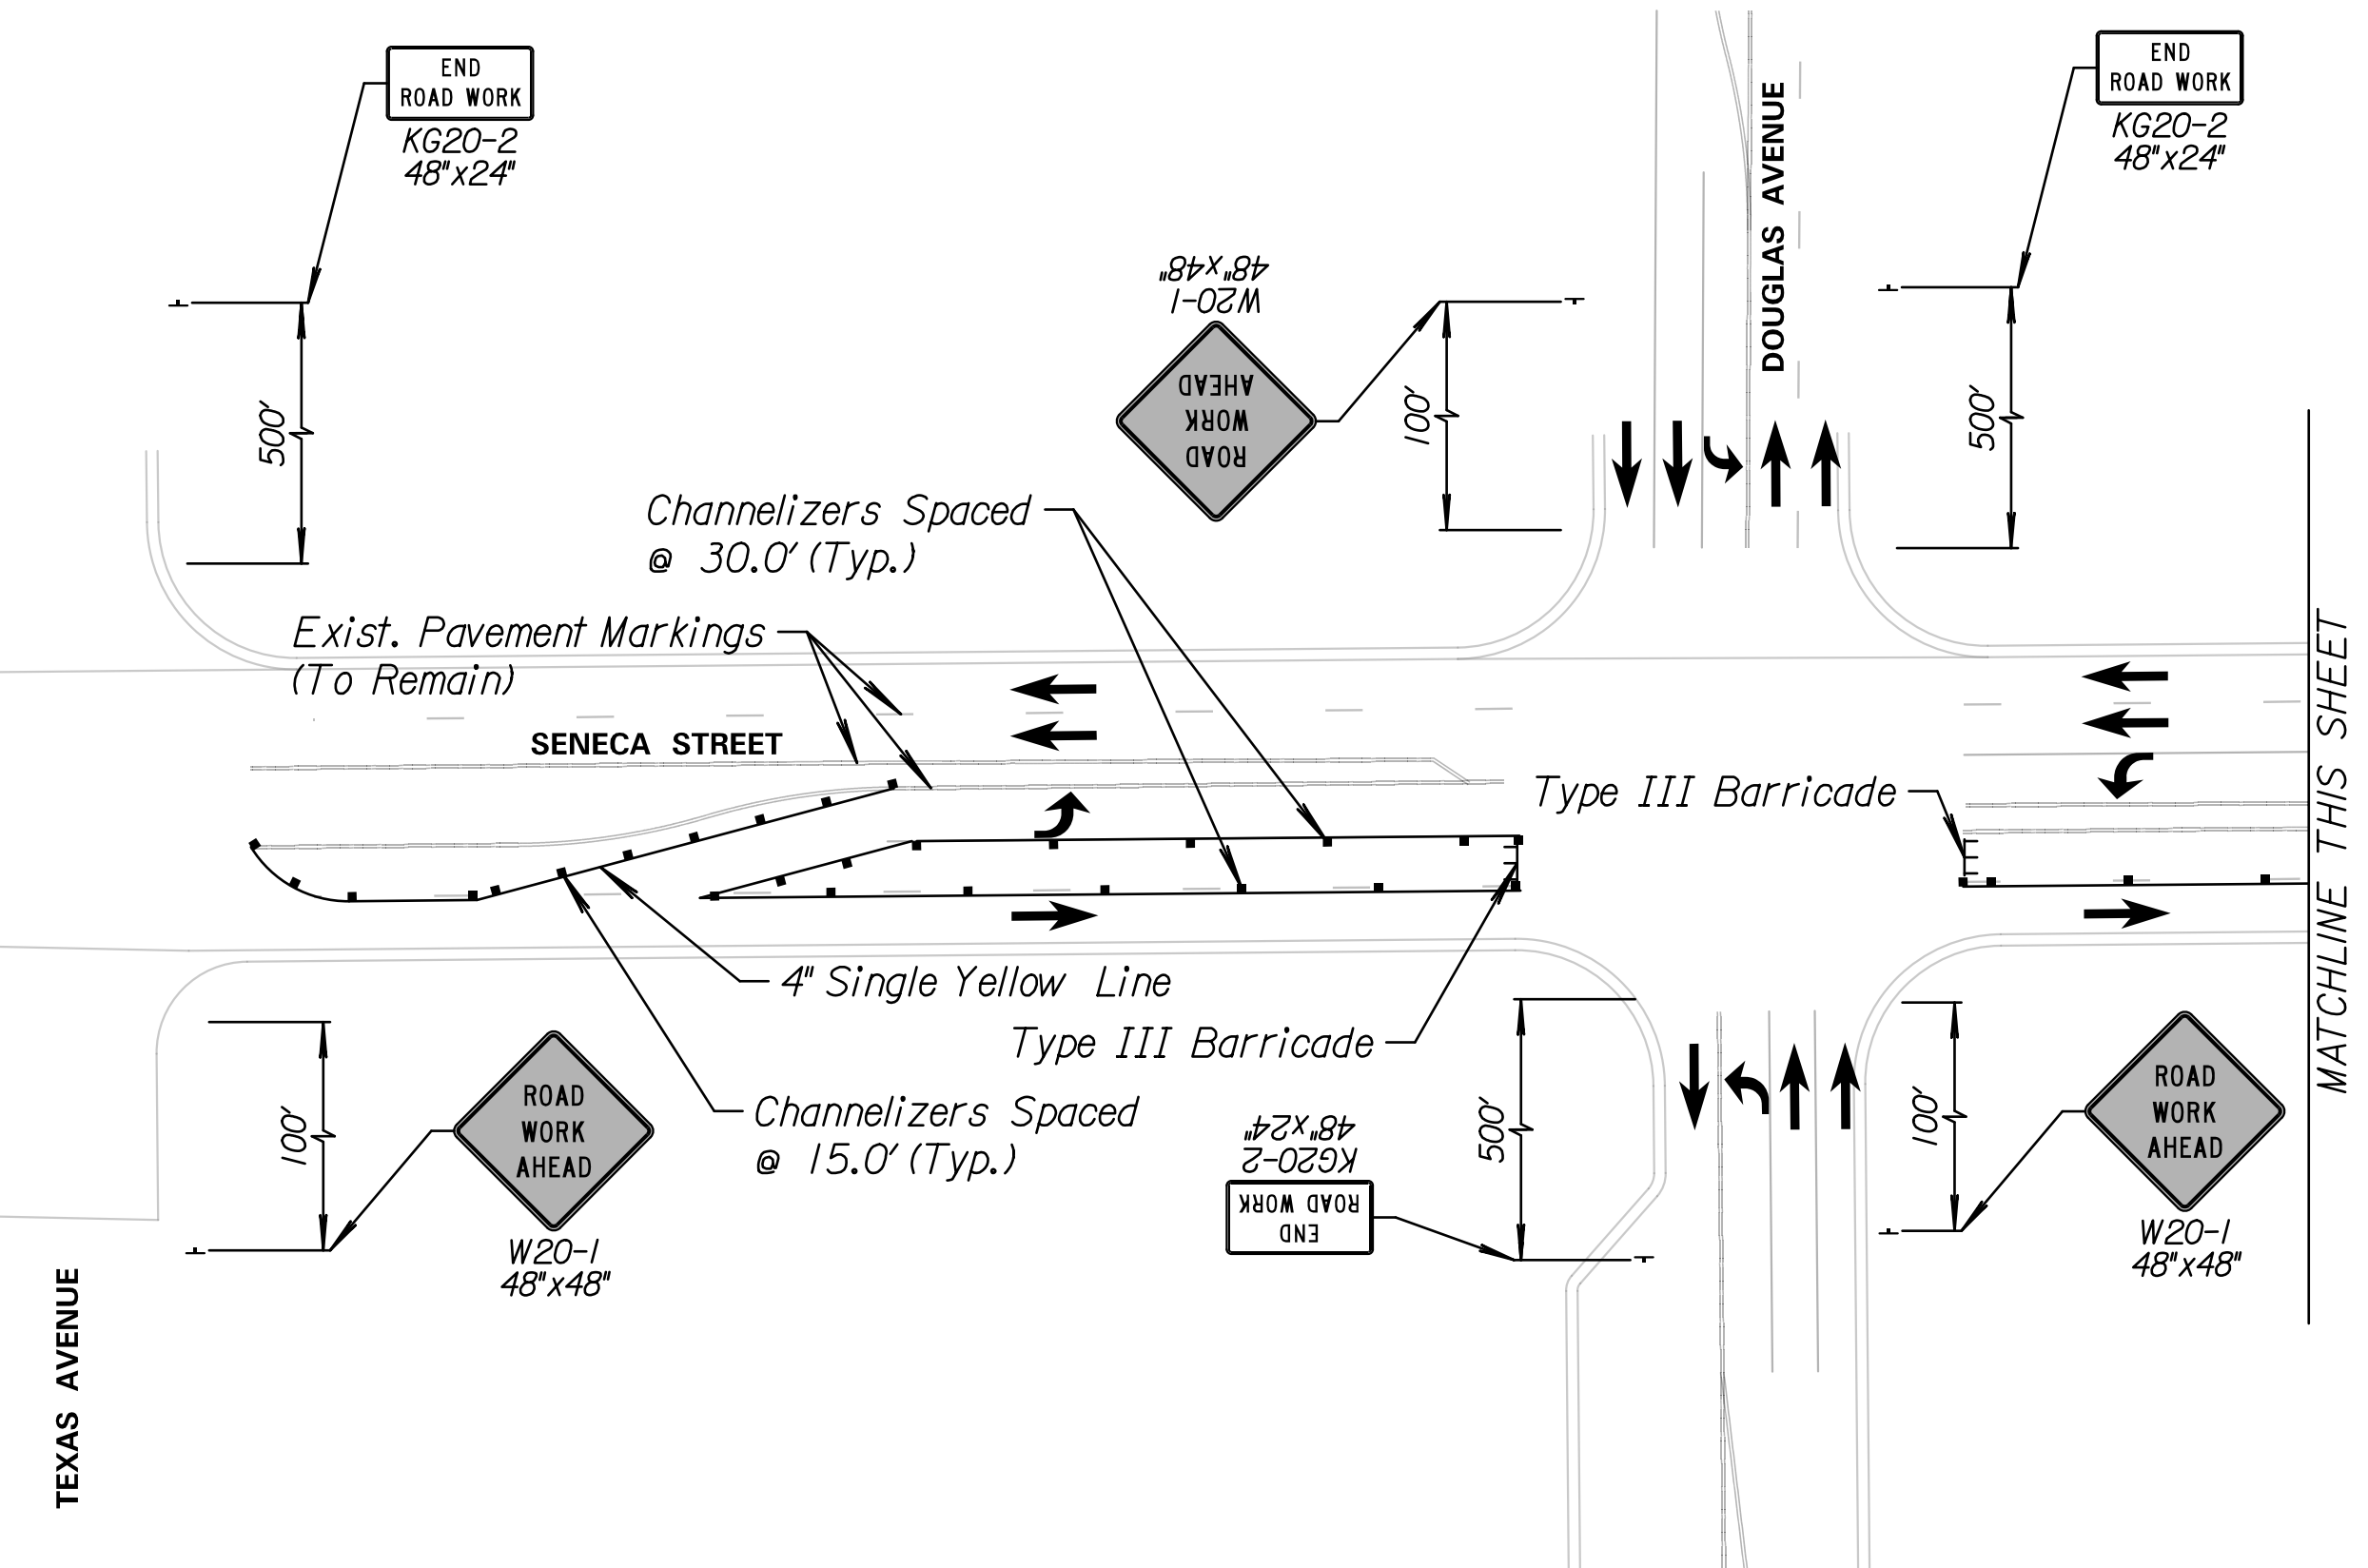

MATCHLINE THIS SHEET

Phase IB


Phase IB construction shall construct all improvements at the Delano Greenway and Seneca Street intersection within the median and inside travel lanes. During this phase, the Contractor shall close the inside lanes on Seneca Street in each direction and shift all traffic to the outside lanes. Once all work in the area is complete, the Contractor shall fully open Seneca Street. Major items of work include concrete pavement, concrete pavers, curb & gutter, sodding, & traffic signal installation.

Note:  
The Contractor shall install the advance warning signs according to the plans unless the Engineer specifies otherwise. The signs shall have a minimum spacing of 100' but shall be adjusted to avoid existing entrances and sideroads, if needed.

Existing pavement marking and signing in conflict with the proposed traffic control layout shall either be removed or covered with approved material in accordance with the City of Wichita Specifications and the City of Wichita Pre-Approved materials.

The Contractor shall leave the portable changeable message board and adjust the message in accordance with the Engineer to continue warning the travelling public that the left lane is closed through construction.

MATCHLINE THIS SHEET

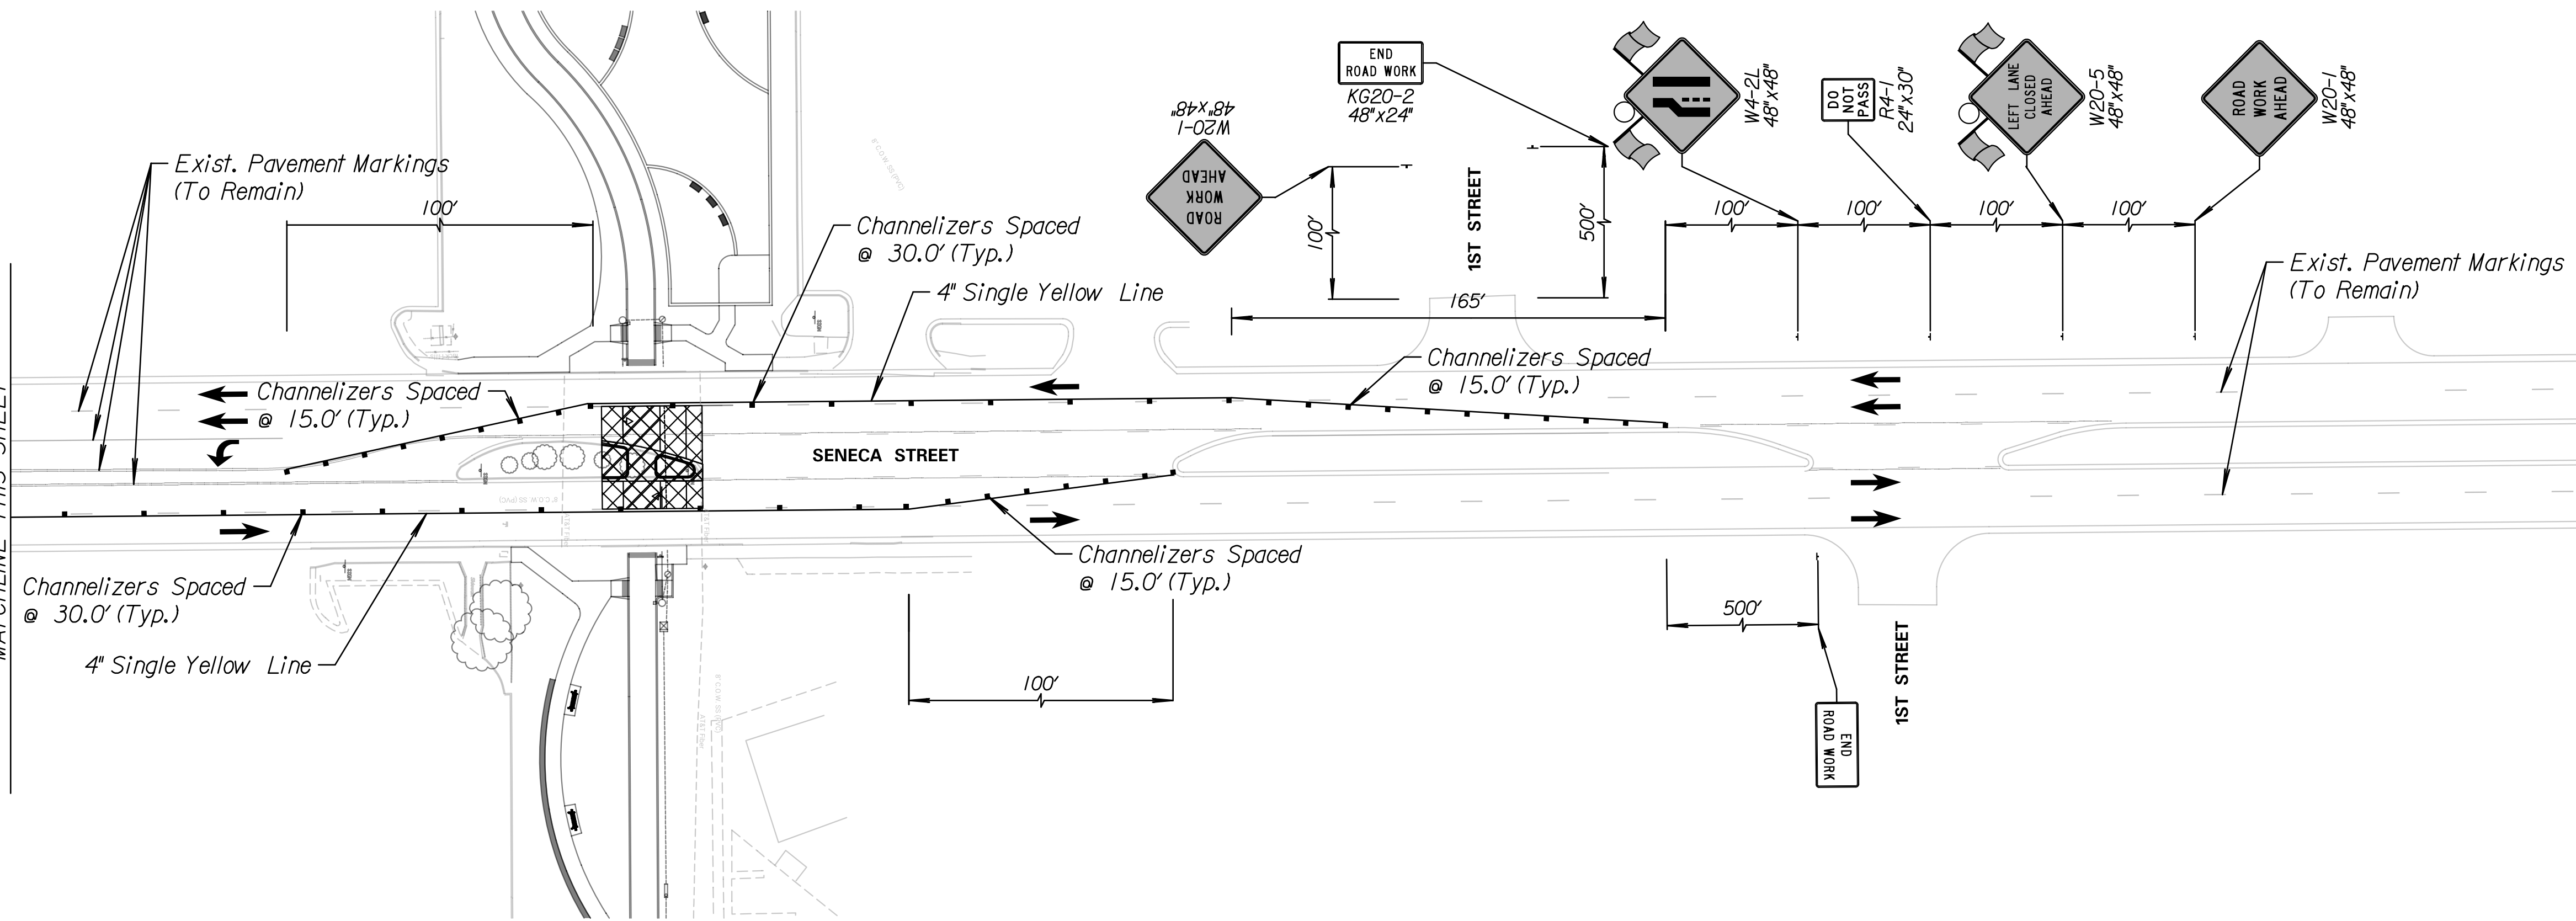

**Tran Systems**  
245 NORTH WACO  
SUITE 222  
WICHITA, KANSAS 67202  
PHONE: 316-303-3000  
FAX: 316-462-5629

CONSULTANTS:  
**LK ARCHITECTURE, INC.**  
345 RIVERVIEW  
SUITE 200  
WICHITA, KANSAS 67208  
PHONE: 316-268-0230

DELANO GREENWAY IMPROVEMENTS  
FROM EXPOSITION TO OSAGE  
WICHITA, KANSAS  
**CITY OF WICHITA**

REVISIONS:	MARK	DATE	DESCRIPTION

PROJ NO: 472-85462  
SCALE: 1"=20'  
DATE: 11/1/2022  
DESIGNED BY: MCG  
DRAWN BY: MCG  
CHECKED BY: MDB

SHEET TITLE:  
**DELANO GREENWAY IMPROVEMENTS TRAFFIC CONTROL PHASE 1B**

SHEET NO.  
**69**  
SHEET 69 OF 96