
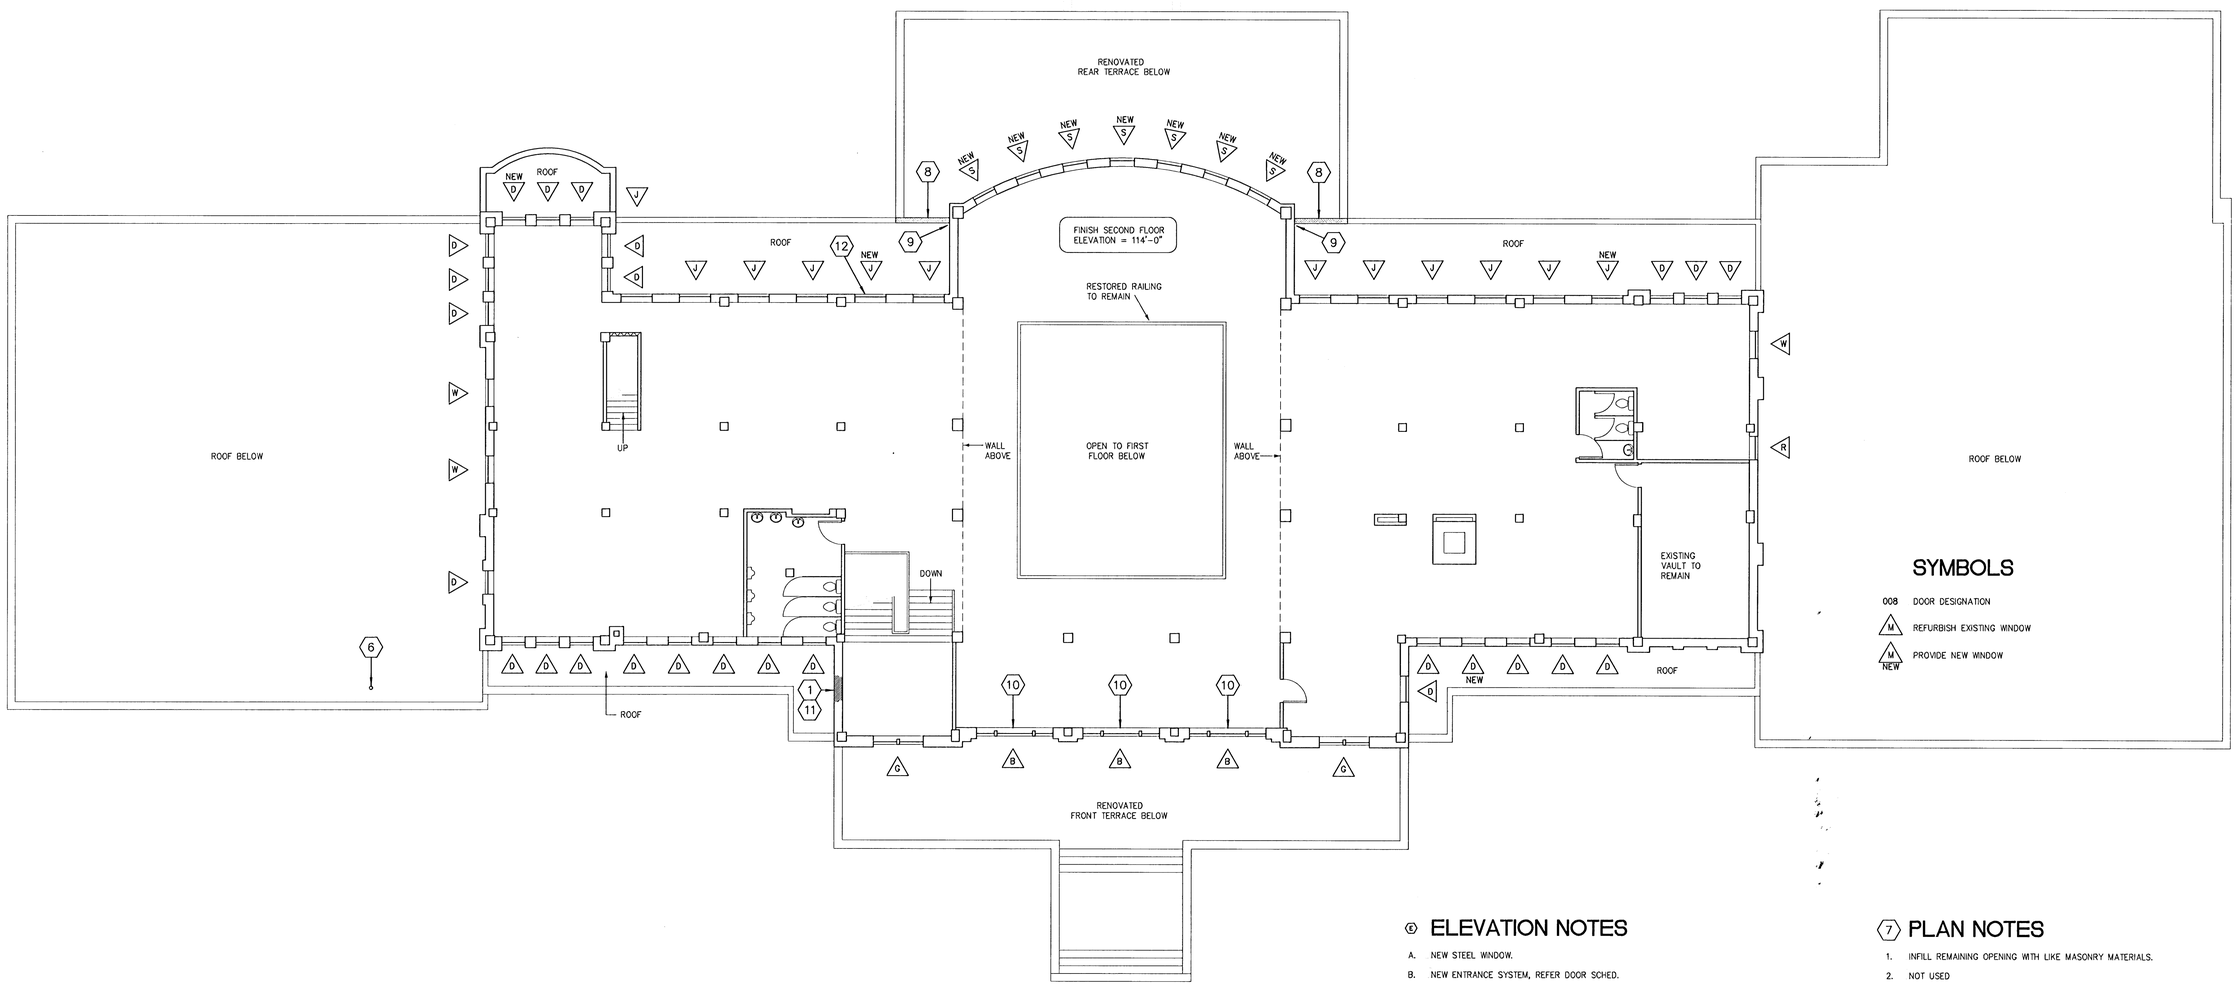


SYMBOLS


- 008 DOOR DESIGNATION
- M REFURBISH EXISTING WINDOW
- M NEW PROVIDE NEW WINDOW

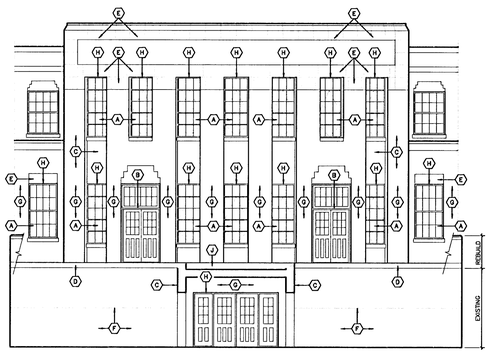

PARTIAL SOUTH ELEVATION –
SOUTH TERRACE – EXPOSED ORIGINAL EXT. WALL
SCALE: 1/8" = 1'-0"

⑥ ELEVATION NOTES

A. NEW STEEL WINDOW.
B. NEW ENTRANCE SYSTEM, REFER DOOR SCHED.
C. CLEAN, TUCK POINT & SEAL ALL BRICK & PRECAST.
D. NEW PRECAST CONC. BELT COURSE.
E. NEW PRECAST AS REQUIRED, MATCH EXISTING.
F. EXISTING EXPOSED CONC. FOUNDATION WALL.
G. PATCH BRICK AS REQ'D. ❻ REMOVAL AREAS.
H. INSTALL NEW LINTEL, WHERE REQ'D.
J. NEW ROOF/WALL FLASHING.
K. PATCH BRICK & REPLACE PRECAST AS REQ'D. ❻ REMOVED WALL AREAS.

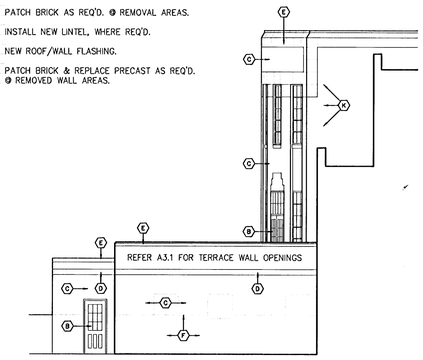

SOUTH TERRACE – EAST ELEVATION
SCALE: 1/8" = 1'-0"

⑦ PLAN NOTES

1. INFILL REMAINING OPENING WITH LIKE MASONRY MATERIALS.
2. NOT USED
3. NOT USED.
4. RELOCATE DOOR AS REQUIRED.
5. REPLACE EXISTING SUSPENDED ACOUSTICAL CEILING SYSTEM AS REQUIRED.
6. RELOCATE EXISTING METAL FLUE.
7. NOT USED.
8. RECONSTRUCT MASONRY RAIL & CAP, TYP. EA. SIDE.
9. PATCH MASONRY AS REQ'D. ❻ PREVIOUS WALL INTERSECTION, TYPICAL BOTH SIDES.
10. REFER STRUCTURAL FOR CONCRETE LINTEL RESTORATION NOTES FOR WORK REQUIRED ABOVE WINDOWS.
11. PATCH MODIFIED BITUMEN ROOFING SYSTEM AS REQ'D. TURN ROOFING UP ONTO MASONRY INFILL. MATCH ADJACENT WALL FLASHING MATERIALS.
12. INFILL REMAINING OPENING WITH MATCHING TOOTHED-IN BRICK.

NORTH

0 8' 16' 24' 32'

SECOND FLOOR RENOVATION PLAN

SCALE: 1" = 8'-0"

M:\2632.10\A2-2
1/8" = 1'-0"

FEMA NO.	STATE	PROJECT NO.	YEAR	SHEET NO.	SHEETS
7	KANSAS	TEA T007(502) 087 TE-0075-02	2004	A2-2	15

SAMUEL FREY LICENSED ARCHITECT 16335 STATE OF KANSAS NATIONAL COUNCIL OF ARCHITECTURAL REGISTRATION BOARDS
APRIL 2004

SCHAEFER JOHNSON COX FREY & ASSOCIATES PA
ARCHITECTURE ENGINEERING PLANNING & INTERIOR DESIGN
250 N. ROCK ROAD, SUITE 130 WICHITA, KANSAS 67206-2303
316 684-0171 FAX (316) 684-8635

KANSAS AVIATION MUSEUM

3350 S. GEORGE WASHINGTON BOULEVARD WICHITA, KANSAS

REVISION DATE
PROJECT NO. 2632.10
DATE APRIL 2004
A2-2

©2000, SCHAEFER JOHNSON COX FREY & ASSOCIATES PA