


General Notes:

1. The BMP's shown on this sheet are considered minimum standards. Whenever sediment enters the streets, storm sewers, ditches, or ponds, contractor will install additional BMP's, as needed, to correct the problem.
2. The soil erosion BMP's shown hereon must be in place at all times during construction until such time as the site is re-established with paving or grass.
3. Back of curb protection can include hay bale, silt fence, Curlex barrier, or approved alternate as shown on BMP standard details. This BMP must remain in place until the area between the curb and right-of-way line has been permanently stabilized.
4. The General Contractor is responsible for the installation and maintenance per the prevention maintenance plan.
5. Concrete trucks will be permitted to wash out only at approved locations, then maintain and clean up as conditions require, by contractor. No hazardous materials are expected to be encountered. Any spills (diesel, fuel, oil, etc.) will be cleaned up and removed immediately. Portable toilets will be supplied and maintained at various sites along the project. Disposal of sewage will be handled by a contracting firm specializing in this activity.
6. The above mentioned storm water prevention methods will be monitored daily and maintained as required. A weekly erosion control log will be posted in the job trailer onsite, and updated weekly. Site inspections are required within 24 hours after a precipitation event of 0.5" or greater.

LEGEND:

- Silt Fence or Hay Bale Barrier — to be installed along property lines where runoff from construction site can run onto other properties.
- Stabilized Construction Entrance — to be used at all locations where vehicles or equipment enter or exit property.

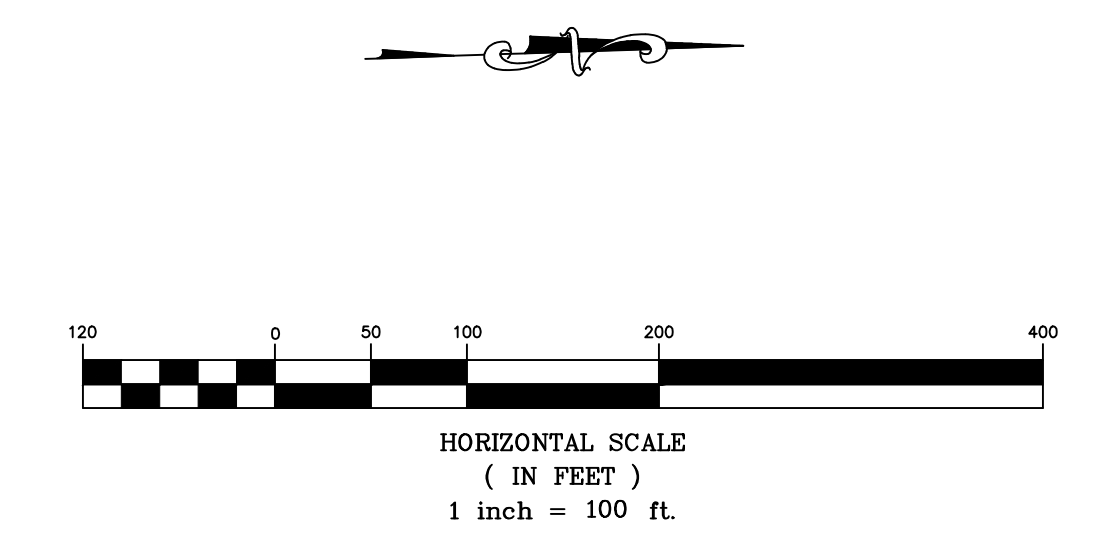

**Fox Run Addition
Erosion Control Plan-Lots/RW
Wichita, Kansas**

	PROJECT NUMBER 468-85360			SHEET 5.0a
	KEM NO. 1706.3	FILE	DATE 04/2018	
DESIGN KM	DRAWN BJ	REVISED		

117 E. Lewis, Wichita, KS 67202 (316)264-0242