FHWA REGION NO.	STATE	PROJECT NUMBER	FISCAL YEAR	SHEET NUMBER	TOTAL SHEETS
7	KANSAS	87N-0245-01	2007	55	55

BENCHMARK #2
STA. 28+90.30, 37.48' RT
BRASS DISK SET IN CONC.
N: 19890.2169
E: 20037.2283
ELEV. 1304.20 FEET

SW COR, SEC 9, T27W, R1E
N: 20000.0000
E: 20000.0000
1/2" IRON PIPE IN THIMBLE
1. MAG NAIL IN NW FACE OF PP 47.92' NE
2. CHISLED "X" SE CURB RETURN 50.87' SE
3. CHISLED "X" SW CURB RETURN 41.95' SW
4. MAG NAIL IN NW FACE OF PP 58.07' NW

POINT TABLE

POINT NUMBER	NORTHING	EASTING	DESCRIPTION
1	20000.0000	20000.0000	SW COR, 9-27-1
2	19997.4233	19669.9569	1/2" I.P. in THIMBLE
3	20660.0148	19971.0022	1/2" I.P. in THIMBLE
4	20037.4253	19670.0564	ROW P.I.
5	20038.1748	19766.0556	ROW P.I.
6	20043.5185	19810.0658	ROW P.I.
7	20044.4944	19935.0675	ROW P.I.
8	20078.7689	19970.0900	ROW P.I.
9	20132.0453	19970.2005	LOT CORNER
10	20304.9997	20030.4632	ROW P.I.
11	20160.6831	20041.2440	ROW P.I.
12	20069.3333	20041.1053	ROW P.I.
13	20050.0000	20066.0700	ROW P.I.
14	19970.0000	20062.9306	ROW P.I.
15	19952.0000	20044.8889	ROW P.I.
16	19851.7646	19969.6564	ROW P.I.
17	19851.7739	19965.6564	ROW P.I.
18	19939.7319	19965.8602	ROW P.I.
19	19969.4989	19935.9335	ROW P.I.
20	19890.2169	20037.2283	BM #2
21	20050.0000	20330.1212	ROW P.I.
22	20000.0000	22607.6500	S1/4 COR, 9-27-1
23	18685.2090	19966.9642	1/2" I.P. in THIMBLE
24	19745.1496	20044.3284	LOT CORNER

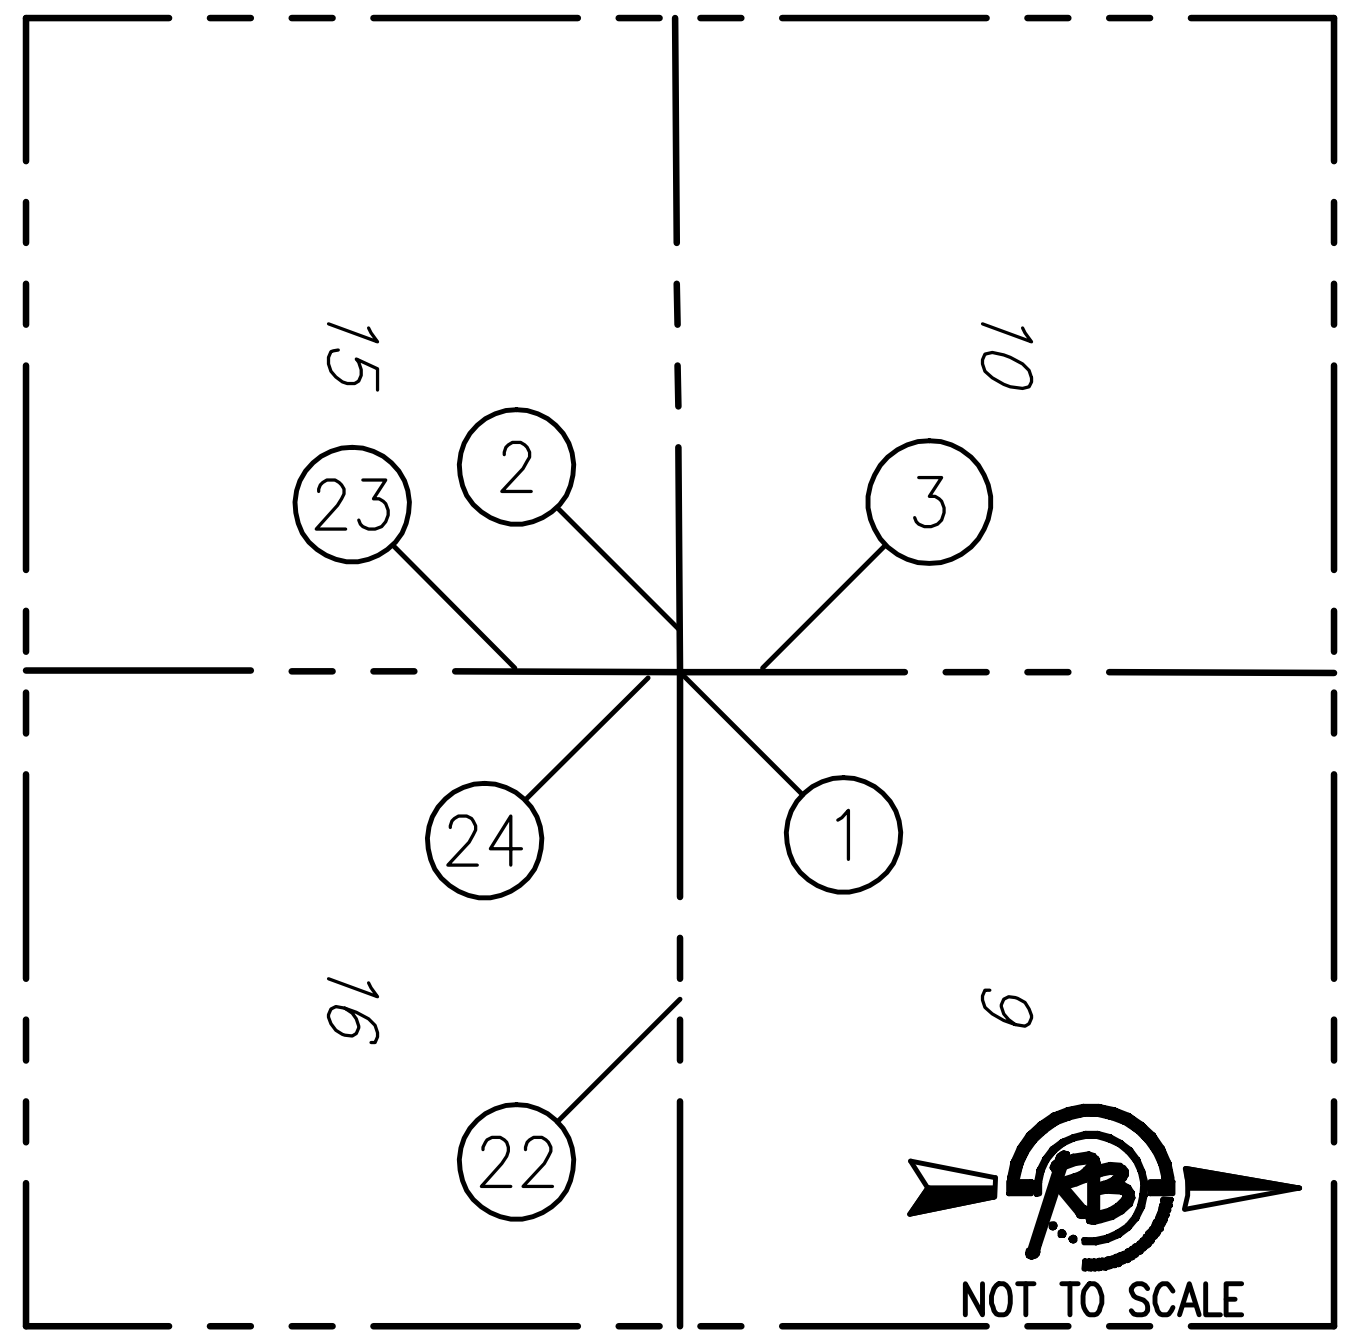

15
10
16
9
23
2
3
24
1
22
NOT TO SCALE

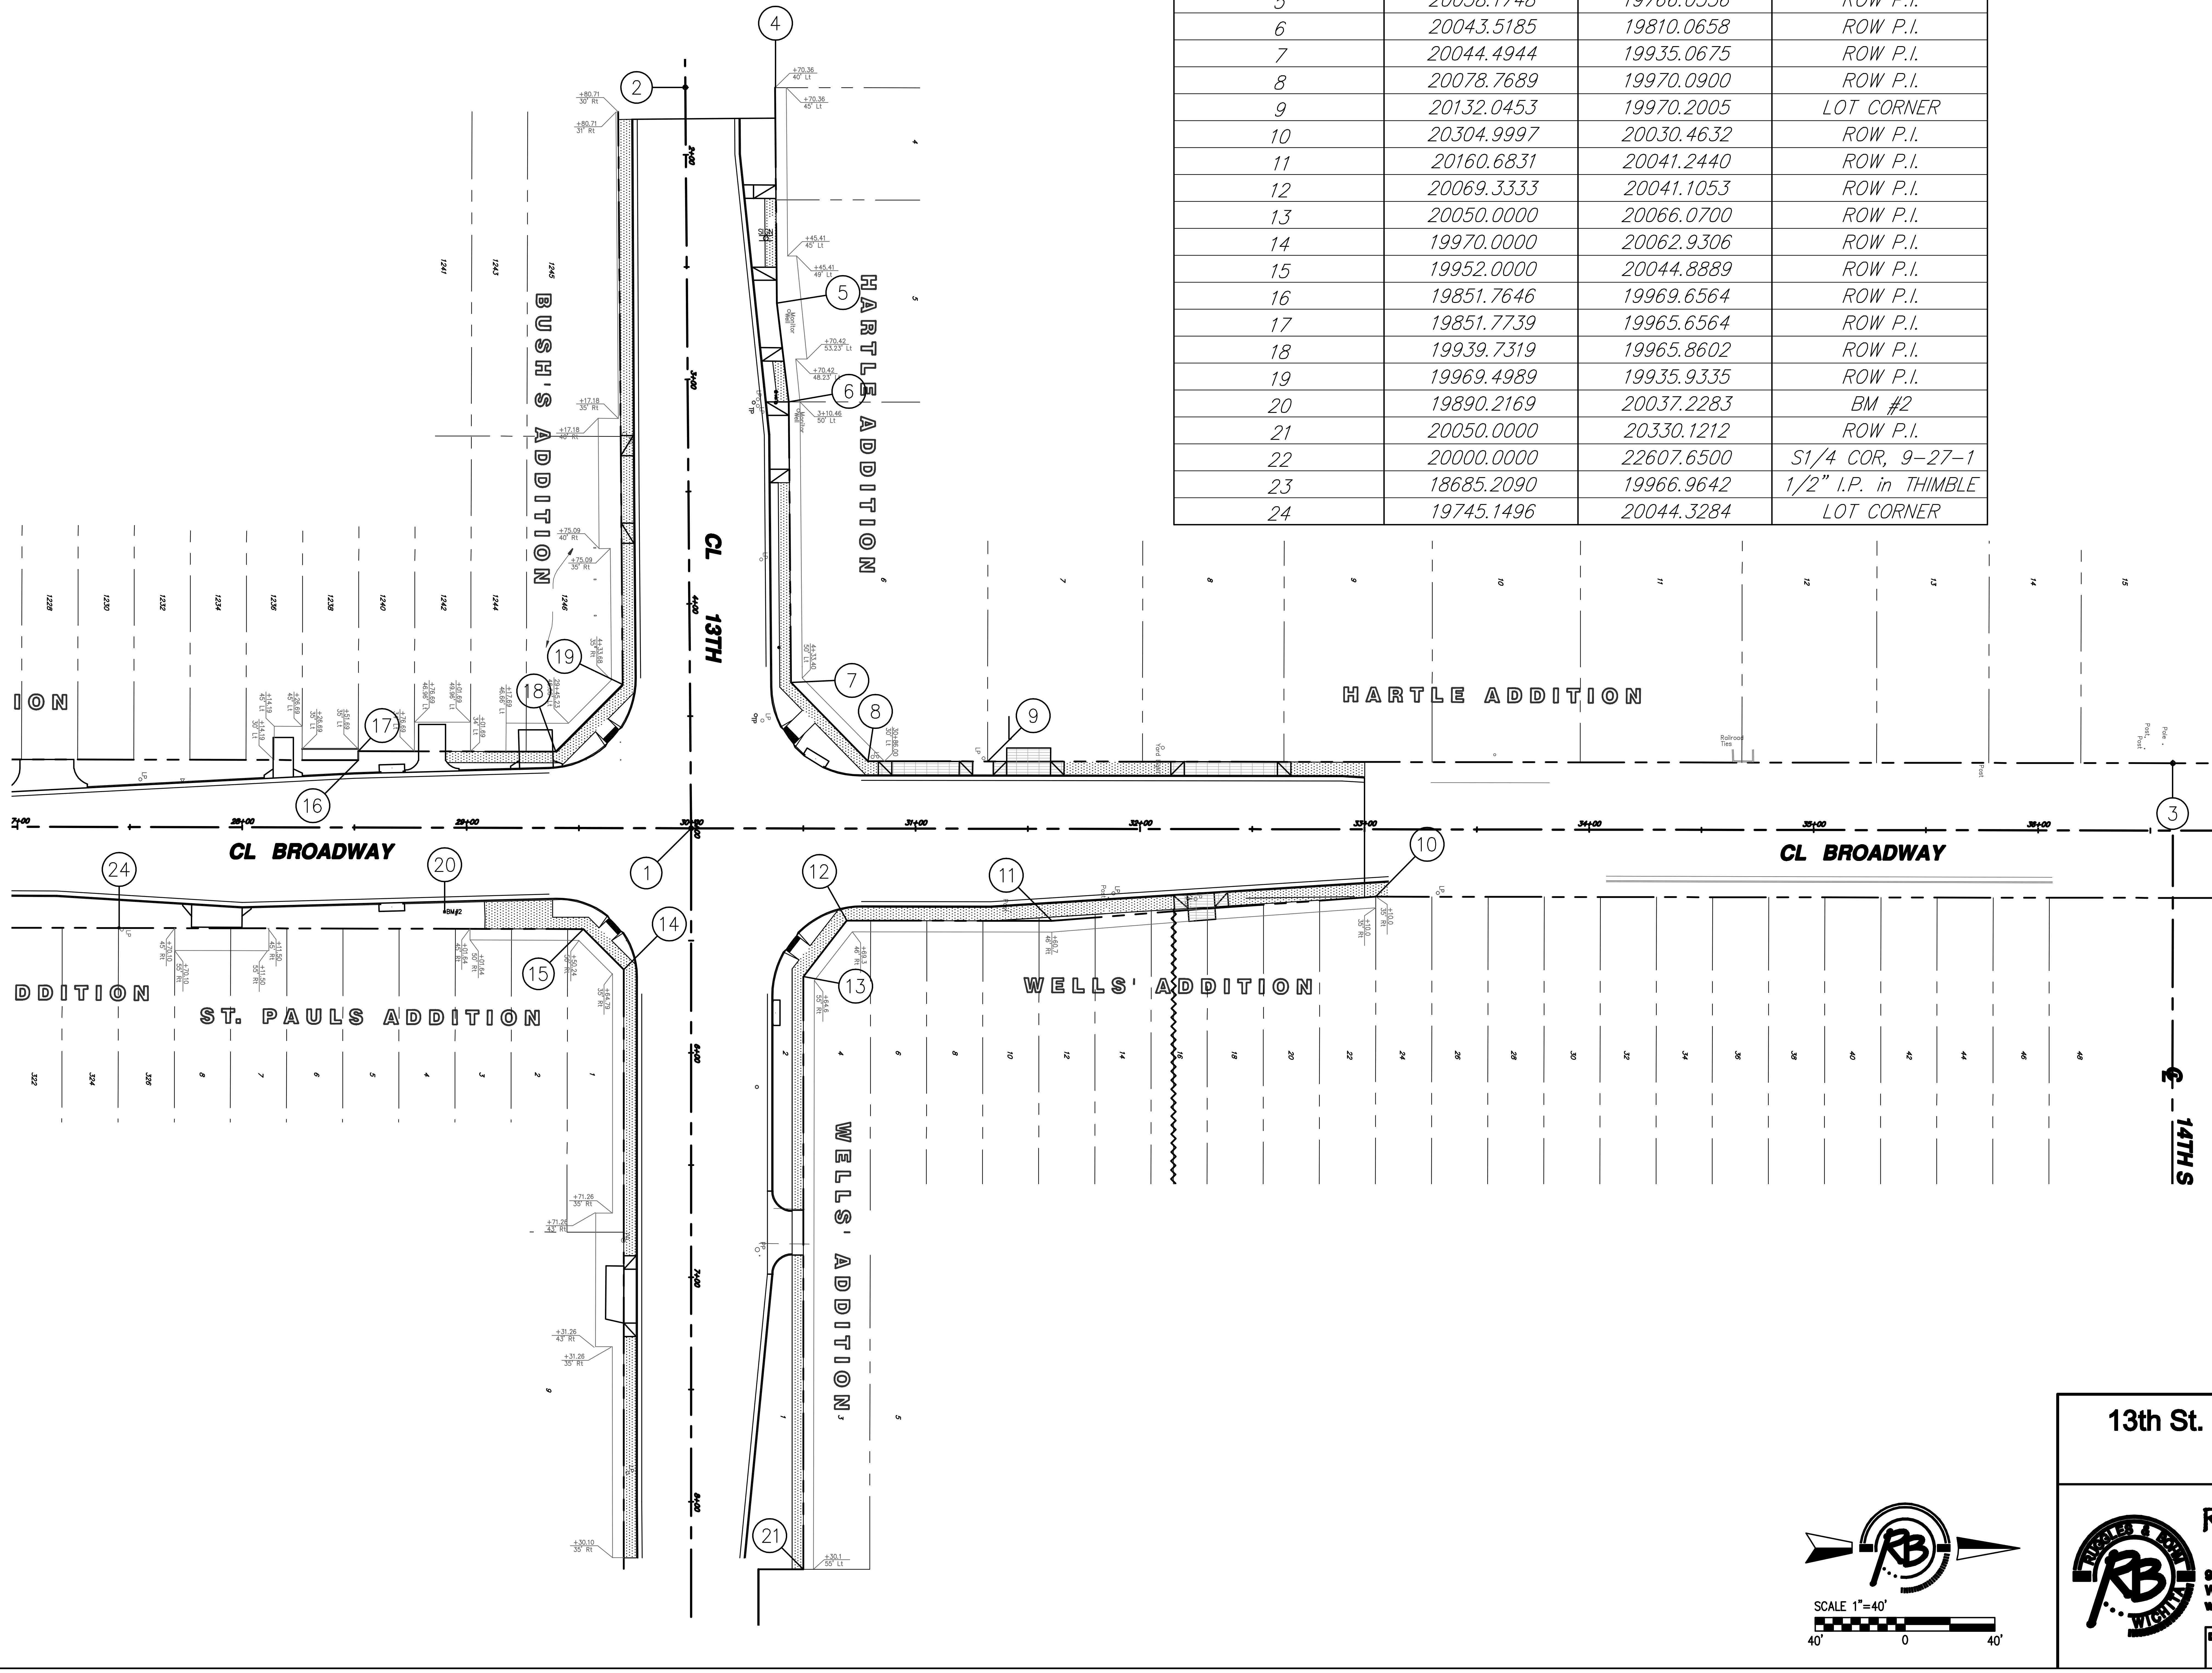

CL BROADWAY
CL 13TH
14TH S
BUSH'S ADDITION
HARTLE ADDITION
WELLS' ADDITION
ST. PAULS ADDITION
DDITION
ION
27+00
28+00
29+00
30+00
31+00
32+00
33+00
34+00
35+00
36+00
37+00
3+00
4+00
6+00
7+00
8+00
1
2
3
4
5
6
7
8
9
10
11
12
13
14
15
16
17
18
19
20
21
24
+80.71 30' Rt
+80.71 31' Rt
+17.18 35' Rt
+17.18 40' Rt
+75.09 40' Rt
+75.09 35' Rt
4+33.68 35' Rt
29+45.23 46.66' Lt
+17.69 46.66' Lt
+01.69 34' Lt
+01.69 49.96' Lt
+76.69 46.96' Lt
+51.69 35' Lt
+26.69 35' Lt
+26.69 45' Lt
+14.19 45' Lt
+14.19 30' Lt
+70.36 40' Lt
+70.36 45' Lt
+45.41 45' Lt
+45.41 49' Lt
+70.42 53.23' Lt
+70.42 48.23' Lt
3+10.46 50' Lt
4+33.40 50' Lt
30+86.00 30' Lt
SIGN
Monitor Well
Yard Light
Railroad Ties
Post
Pole
LP
TP
PP
BM#2
+70.10 45' Rt
+70.10 55' Rt
+11.50 45' Rt
+11.50 55' Rt
+01.64 45' Rt
+01.64 50' Rt
+50.24 50' Rt
+64.79 35' Rt
+71.26 35' Rt
+71.26 43' Rt
+31.26 43' Rt
+31.26 35' Rt
+30.10 35' Rt
+69.3 46' Rt
+64.6 55' Rt
+60.7 46' Rt
+10.0 35' Rt
+30.1 55' Lt
1228
1230
1232
1234
1236
1238
1240
1241
1242
1243
1244
1245
1246
322
324
326
SCALE 1"=40'
40'
0
40'

REVISED: 10/22/07

13th St. N. and Broadway Improvements
Bubble Map

Ruggles & Bohm, P.A.
Engineering, Surveying, Land Planning
924 North Main
Wichita, Kansas 67203
www.rbkansas.com
(316) 264-8008
(316) 264-4621 fax
E-mail: info@rbkansas.com

DESIGN	PDC
DRAWN	JDE
REVIEW	Mar. 20, 2006
UTILITY	
DATE	Aug., 06, 2007
DRAWING FILE	base narrow ....
PROJECT NUMBER	706705
RB JOB	1219T
SHEET	55 OF 55