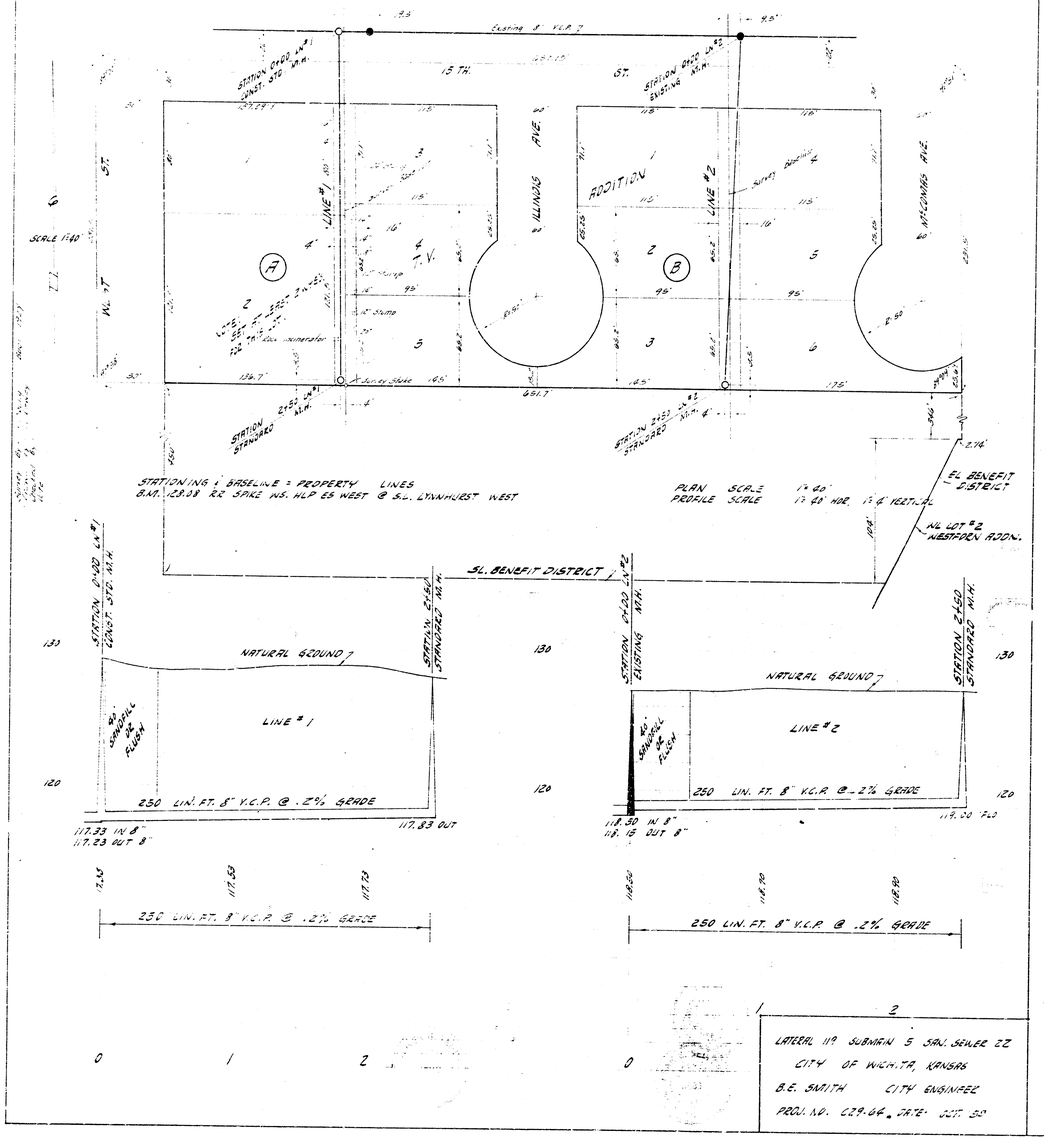
15 TH.
ST.
ILLINOIS AVE.
WISCONSIN AVE.
ADDITION 1
ADDITION 2
LINE #1
LINE #2
SCALE 1:40
W. 17 ST.
EXISTING 8" V.C.P.
STATION 0+00 LINE #1 CONST. STD. M.H.
STATION 0+00 LINE #2 EXISTING M.H.
STATION 2+50 STANDARD M.H.
STATIONING & BASELINE = PROPERTY LINES
B.M. 128.08 RR SPIKE W.S. W.P. E.S. WEST @ SL. LYNNHURST WEST
PLAN SCALE 1" = 40'
PROFILE SCALE 1" = 40' HOR. 1" = 4' VERT.
EL BENEFIT DISTRICT
N.L. LOT #2 WESTPORT ADDN.
SL. BENEFIT DISTRICT
NATURAL GROUND
LINE #1
LINE #2
250 LIN. FT. 8" V.C.P. @ .2% GRADE
117.33 IN 8"
117.23 OUT 8"
117.83 OUT
118.30 IN 8"
118.15 OUT 8"
119.00 OUT
LATERAL 119 SUBMAIN 5 SAN. SEWER 22
CITY OF WICHITA, KANSAS
B.E. SMITH CITY ENGINEER
PROJ. NO. 629-64 DATE: JULY 30